PRODUCT DESCRIPTION

Pendant for general or accent lighting.
Aluminium luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	Suspension
Dimensions	ø 450mm h 123mm
IP rating	IP20
Power	230V or 350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)



Color Temperature	Wattage excl. driver	Wattage incl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
350mA							
2700K	11,8W	13,6W	350mA	1558 lm	134 lm/W	90+	E
	16,9W	19,4W	500mA	2225 lm	134 lm/W	90+	E
3000K	11,8W	13,6W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	19,4W	500mA	2449 lm	147 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) Tubb: **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) Acoustic Disc: **C** (Coffee) / **B** (Tinged with Beige) / **YR** (Tinged with Yellow Red) / **NB** (Night Blue)
+ (3) **G** (gold reflector)

DRIVER INCLUDED - 350mA - non dimmable

2700K

14°	ZUMI682132306	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 14° glass incl. driver
25°	ZUMI682132406	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 25° glass incl. driver
39°	ZUMI682132506	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 39° glass incl. driver
61°	ZUMI682132606	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 61° glass incl. driver

3000K

14°	ZUMI682142306	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 14° glass incl. driver
25°	ZUMI682142406	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 25° glass incl. driver
39°	ZUMI682142506	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 39° glass incl. driver
61°	ZUMI682142606	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 61° glass incl. driver

DRIVER EXCLUDED - 350mA/500mA

2700K

14°	ZUMI682132317	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI682132417	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI682132517	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI682132617	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

3000K

14°	ZUMI682142317	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI682142417	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI682142517	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI682142617	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

> REQUIREMENTS

Round base

	ZUMIPD801 (+ W / B)	Round base Ø 80

3F Adapter

Non dimmable

350mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

Dimmable

350mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

> OPTIONS

Honeycomb grid

	ZUMI25HC	Honeycomb grid

PRODUCT DESCRIPTION

Pendant for general or accent lighting.
Aluminium luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	Suspension
Dimensions	ø 600mm h 123mm
IP rating	IP20
Power	230V or 350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)

Color Temperature	Wattage excl. driver	Wattage incl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
350mA							
2700K	11,8W	13,6W	350mA	1558 lm	134 lm/W	90+	F
	16,9W	19,4W	500mA	2225 lm	134 lm/W	90+	F
3000K	11,8W	13,6W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	19,4W	500mA	2449 lm	147 lm/W	90+	E



ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) Tubb: **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) Acoustic Disc: **C** (Coffee) / **B** (Tinged with Beige) / **YR** (Tinged with Yellow Red) / **NB** (Night Blue)
+ (3) **G** (gold reflector)

DRIVER INCLUDED - 350mA - non dimmable

2700K

14°	ZUMI692132306	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 14° glass incl. driver
25°	ZUMI692132406	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 25° glass incl. driver
39°	ZUMI692132506	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 39° glass incl. driver
61°	ZUMI692132606	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 61° glass incl. driver

3000K

14°	ZUMI692142306	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 14° glass incl. driver
25°	ZUMI692142406	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 25° glass incl. driver
39°	ZUMI692142506	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 39° glass incl. driver
61°	ZUMI692142606	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 61° glass incl. driver

DRIVER EXCLUDED - 350mA/500mA

2700K

14°	ZUMI692132317	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI692132417	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI692132517	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI692132617	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

3000K

14°	ZUMI692142317	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI692142417	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI692142517	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI692142617	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

> REQUIREMENTS

Round base

	ZUMIPD801 (+ W / B)	Round base Ø 80

3F Adapter

Non dimmable

350mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

Dimmable

350mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

> OPTIONS

Honeycomb grid

	ZUMI25HC	Honeycomb grid

PRODUCT DESCRIPTION

Pendant for general or accent lighting.
Aluminium luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	Suspension
Dimensions	ø 800mm h 123mm
IP rating	IP20
Power	230V or 350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)

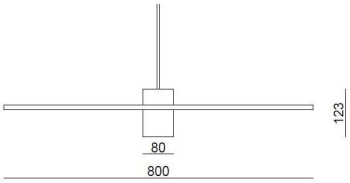

Color Temperature	Wattage excl. driver	Wattage incl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
350mA							
2700K	11,8W	13,6W	350mA	1558 lm	134 lm/W	90+	F
	16,9W	19,4W	500mA	2225 lm	134 lm/W	90+	F
3000K	11,8W	13,6W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	19,4W	500mA	2449 lm	147 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) Tubb: **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) Acoustic Disc: **C** (Coffee) / **B** (Tinged with Beige) / **YR** (Tinged with Yellow Red) / **NB** (Night Blue)
+ (3) **G** (gold reflector)

DRIVER INCLUDED - 350mA - non dimmable

2700K

14°	ZUMI702132306	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 14° glass incl. driver
25°	ZUMI702132406	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 25° glass incl. driver
39°	ZUMI702132506	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 39° glass incl. driver
61°	ZUMI702132606	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 61° glass incl. driver

3000K

14°	ZUMI702142306	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 14° glass incl. driver
25°	ZUMI702142406	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 25° glass incl. driver
39°	ZUMI702142506	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 39° glass incl. driver
61°	ZUMI702142606	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 61° glass incl. driver

DRIVER EXCLUDED - 350mA/500mA

2700K

14°	ZUMI702132317	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI702132417	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI702132517	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI702132617	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

3000K

14°	ZUMI702142317	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI702142417	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI702142517	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI702142617	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

> REQUIREMENTS

Round base

	ZUMIPD801 (+ W / B)	Round base Ø 80

3F Adapter

Non dimmable

350mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

Dimmable

350mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

> OPTIONS

Honeycomb grid

	ZUMI25HC	Honeycomb grid