

**PRODUCT DESCRIPTION**

Adjustable recessed downlighter for general or accent lighting with a light- source that is placed ‘deeper’ into the fixture which makes it a more subtle downlighter.


Aluminium luminaire, white or black powder coated, provided with a LEDmodule which replaces the MR16 halogen spotlight. Available in 2700, 3000 and 4000K and in a low output (250mA) and high output (350mA) version.



**TECHNICAL DATA**

Application	recessed
Dimensions	cut out: torsion springs : $\varnothing$ 75mm h120mm
IP rating	IP20
Power	250/350mA
Lifetime L70/B50/65°C	>50000h
MacAdam ellipse	3
Guarantee	5 year

(\*on components, only if ordered luminaire + driver)

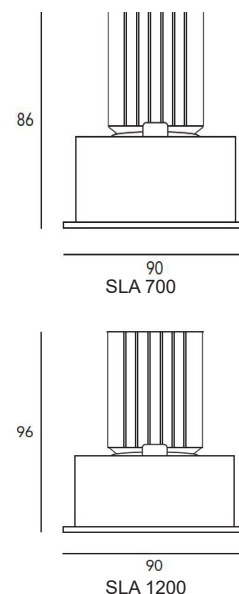

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	8,8W	250mA	770 lm	88 lm/W	90+	G
	12,2W	350mA	1140 lm	93 lm/W	90+	G
3000K	8,8W	250mA	840 lm	95 lm/W	90+	F
	12,2W	350mA	1170 lm	96 lm/W	90+	F
4000K	8,8W	250mA	890 lm	101 lm/W	90+	F
	12,2W	350mA	1270 lm	104 lm/W	90+	F

**ORDER REFERENCE**

> LUMINAIRE

**ORDER REFERENCE + W (white) / B (black)**

**2700K**

700lm

24° ZUMI991682814 R2A DEEP 700 DC 8,8W 250mA 770lm 2700K CRI90 24° excl.driver  
 36° ZUMI991692914 R2A DEEP 700 DC 8,8W 250mA 770lm 2700K CRI90 36° excl.driver

1200lm

12° ZUMI992632706 R2A DEEP 1200 DC 12,2W 350mA 970lm 2700K CRI90 12° excl.driver  
 24° ZUMI991622806 R2A DEEP 1200 DC 12,2W 350mA 1140lm 2700K CRI90 24° excl.driver  
 36° ZUMI991632906 R2A DEEP 1200 DC 12,2W 350mA 1140lm 2700K CRI90 36° excl.driver

**3000K**

700lm

24° ZUMI991702814 R2A DEEP 700 DC 8,8W 250mA 840lm 3000K CRI90 24° excl.driver  
 36° ZUMI991712914 R2A DEEP 700 DC 8,8W 250mA 840lm 3000K CRI90 36° excl.driver

1200lm

12° ZUMI992642706 R2A DEEP 1200 DC 12,2W 350mA 1040lm 3000K CRI90 12° excl.driver  
 24° ZUMI991642806 R2A DEEP 1200 DC 12,2W 350mA 1170lm 3000K CRI90 24° excl.driver  
 36° ZUMI991652906 R2A DEEP 1200 DC 12,2W 350mA 1170lm 3000K CRI90 36° excl.driver

**4000K**

700lm

24° ZUMI991722814 R2A DEEP 700 DC 8,8W 250mA 890lm 4000K CRI90 24° excl.driver  
 36° ZUMI991732914 R2A DEEP 700 DC 8,8W 250mA 890lm 4000K CRI90 36° excl.driver

1200lm

12° ZUMI992652706 R2A DEEP 1200 DC 12,2W 350mA 1130lm 4000K CRI90 12° excl.driver  
 24° ZUMI991662806 R2A DEEP 1200 DC 12,2W 350mA 1270lm 4000K CRI90 24° excl.driver  
 36° ZUMI991672906 R2A DEEP 1200 DC 12,2W 350mA 1270lm 4000K CRI90 36° excl.driver

> DRIVER

250mA

**dimmable**

TRID87500627 LCA 15W 180-350mA flexC PH-C SR ADV (phase cut)  
or TRID28000673 LCA 10W 150-400mA one4all SC PRE (DALI, pushDIM)  
+ Strain-relief TRID28001168  
+ PLUG TRID28001106

**non dimmable**

TRID87500580 LC 10W 250mA fixC SR SNC

350mA

**dimmable**

TRID87500627 LCA 15W 180-350mA flexC PH-C SR ADV (phase cut)  
or TRID28000674 LCA 17W 250-700mA one4all SC PRE (DALI, pushDIM)  
+ Strain-Relief TRID28001168  
+ PLUG TRID28001110

**non dimmable**

TRID28000699 LC 17W 250-700mA flexC SR EX

**PRODUCT DESCRIPTION**


Adjustable recessed downlighter for general or accent lighting with a lightsource that is placed 'deeper' into the fixture which makes it a more subtle downlighter.

Aluminium luminaire, white or black powder coated, provided with a LEDmodule which replaces the GU10 halogen spotlight. Available in 2700, 3000 and 4000K.

**TECHNICAL DATA**

Application	recessed
Dimensions	cut out: <b>torsion</b> springs: ø75mm h125mm
IP rating	IP20
Power	230V
Lifetime L70/B50/75°C	>50000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	9,5W	230V	710 lm	75 lm/W	90+	G
3000K	9,5W	230V	760 lm	80 lm/W	90+	G
4000K	9,5W	230V	810 lm	85 lm/W	90+	F

**ORDER REFERENCE**

> [LUMINAIRE](#)

**ORDER REFERENCE + W (white) / B (black)**

**2700K**

12°	ZUMI982602701	R2A DEEP AC 9,5W 230V 710lm 2700K CRI90 12°
24°	ZUMI981642801	R2A DEEP AC 9,5W 230V 710lm 2700K CRI90 24°
36°	ZUMI981652901	R2A DEEP AC 9,5W 230V 710lm 2700K CRI90 36°

**3000K**

12°	ZUMI982612701	R2A DEEP AC 9,5W 230V 760lm 3000K CRI90 12°
24°	ZUMI981662801	R2A DEEP AC 9,5W 230V 760lm 3000K CRI90 24°
36°	ZUMI981672901	R2A DEEP AC 9,5W 230V 760lm 3000K CRI90 36°

**4000K**

12°	ZUMI982622701	R2A DEEP AC 9,5W 230V 810lm 4000K CRI90 12°
24°	ZUMI981682801	R2A DEEP AC 9,5W 230V 810lm 4000K CRI90 24°
36°	ZUMI981692901	R2A DEEP AC 9,5W 230V 810lm 4000K CRI90 36°

> [no driver needed](#)

dimnable phase cut- see dimmerlist