

PRODUCT DESCRIPTION

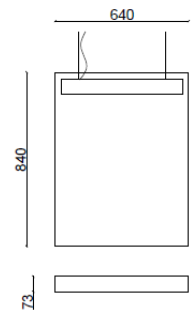
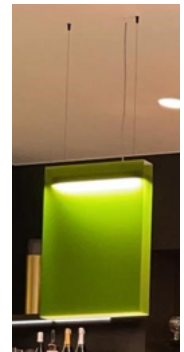
Suspended luminaire for general lighting. With its unique design a real eyecatcher.

Available in several colour temperatures, dimmable and non dimmable.

TECHNICAL DATA

Application	suspension
Dimensions	640 x 840 x 73mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Forward Current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K LO	400mA	135 lm/W	90+	D
2700K HO	275mA	136 lm/W	90+	D
3000K LO	400mA	142 lm/W	90+	D
3000K HO	400mA	146 lm/W	90+	D
4000K LO	400mA	148 lm/W	90+	D
4000K HO	400mA	153 lm/W	90+	D

**ORDER REFERENCE**

> LUMINAIRE

! ORDER REFERENCE + (1) **W**(white)/ **B**(blue)/ **G**(green)/ **GR**(grey)/ **R**(red)
+ (2) **D** (if dimmable)

2700K	ZUMI17864842380119	Sacos 640x840 down 2546lm 21,6W up 1224lm 10,5W 2700K incl.driver
3000K	ZUMI17864842390119	Sacos 640x840 down 2612lm 20,6W up 1272lm 10,5W 3000K incl.driver
4000K	ZUMI17864842400119	Sacos 640x840 down 2740lm 20,6W up 1320lm 10,5W 4000K incl.driver

> DRIVER

Included, if dimmable: DALI, pushDIM

PRODUCT DESCRIPTION

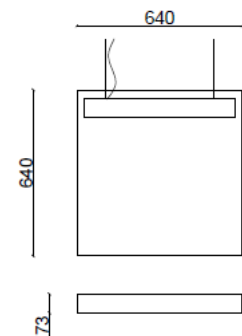
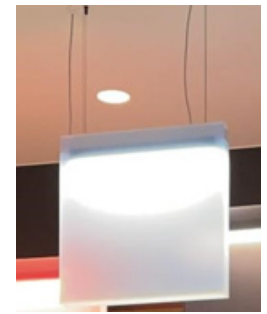
Suspended luminaire for general lighting. With its unique design a real eyecatcher.

Available in several colour temperatures, dimmable and non dimmable.

TECHNICAL DATA

Application	suspension
Dimensions	640 x 640 x 73mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Forward Current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K LO	400mA	135 lm/W	90+	D
2700K HO	275mA	136 lm/W	90+	D
3000K LO	400mA	142 lm/W	90+	D
3000K HO	400mA	146 lm/W	90+	D
4000K LO	400mA	148 lm/W	90+	D
4000K HO	400mA	153 lm/W	90+	D

**ORDER REFERENCE**

> LUMINAIRE

! ORDER REFERENCE + (1) **W**(white)/ **B**(blue)/ **G**(green)/ **GR**(grey)/ **R**(red)
+ (2) **D** (if dimmable)

2700K	ZUMI17864642380119	Sacos 640x640 down 2546lm 21,6W up 1224lm 10,5W 2700K incl.driver
3000K	ZUMI17864642390119	Sacos 640x640 down 2612lm 20,6W up 1272lm 10,5W 3000K incl.driver
4000K	ZUMI17864642400119	Sacos 640x640 down 2740lm 20,6W up 1320lm 10,5W 4000K incl.driver

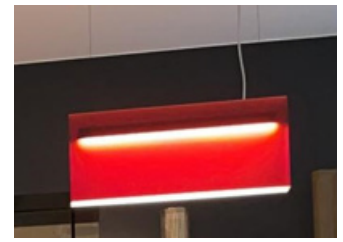
> DRIVER

Included, if dimmable: DALI, pushDIM


PRODUCT DESCRIPTION

Suspended luminaire for general lighting. With its unique design a real eyecatcher.

Available in several colour temperatures, dimmable and non dimmable.

**TECHNICAL DATA**

Application	suspension
Dimensions	640 x 300 x 73mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year



Color Temperature	Forward Current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K LO	400mA	135 lm/W	90+	D
2700K HO	275mA	136 lm/W	90+	D
3000K LO	400mA	142 lm/W	90+	D
3000K HO	400mA	146 lm/W	90+	D
4000K LO	400mA	148 lm/W	90+	D
4000K HO	400mA	153 lm/W	90+	D

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W**(white)/ **B**(blue)/ **G**(green)/ **GR**(grey)/ **R**(red)
+ (2) **D** (if dimmable)

2700K	ZUMI17864302380119	Sacos 640x300 down 2546lm 21,6W up 1224lm 10,5W 2700K incl.driver
3000K	ZUMI17864302390119	Sacos 640x300 down 2612lm 20,6W up 1272lm 10,5W 3000K incl.driver
4000K	ZUMI17864302400119	Sacos 640x300 down 2740lm 20,6W up 1320lm 10,5W 4000K incl.driver

> DRIVER

Included, if dimmable: DALI, pushDIM

PRODUCT DESCRIPTION

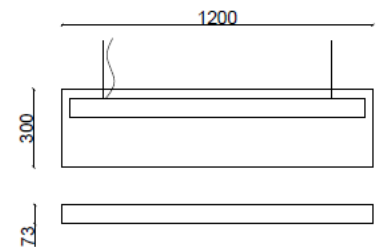
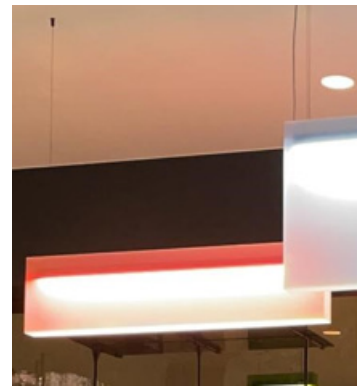
Suspended luminaire for general lighting. With its unique design a real eyecatcher.

Available in several colour temperatures, dimmable and non dimmable.

TECHNICAL DATA

Application	suspension
Dimensions	1200 x 300 x 73mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Forward Current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K LO	400mA	135 lm/W	90+	D
2700K HO	275mA	136 lm/W	90+	D
3000K LO	400mA	142 lm/W	90+	D
3000K HO	400mA	146 lm/W	90+	D
4000K LO	400mA	148 lm/W	90+	D
4000K HO	400mA	153 lm/W	90+	D

**ORDER REFERENCE**

> LUMINAIRE

! ORDER REFERENCE + (1) **W**(white)/ **B**(blue)/ **G**(green)/ **GR**(grey)/ **R**(red)
+ (2) **D** (if dimmable)

2700K	ZUMI178120302380119	Sacos 1200x300 down 5092lm 43,1W up 2448lm 20,9W 2700K incl.driver
3000K	ZUMI178120302390119	Sacos 1200x300 down 5224lm 41,2W up 2544lm 20,9W 3000K incl.driver
4000K	ZUMI178120302400119	Sacos 1200x300 down 5480lm 41,2W up 2640lm 20,9W 4000K incl.driver

> DRIVER

Included, if dimmable: DALI, pushDIM