

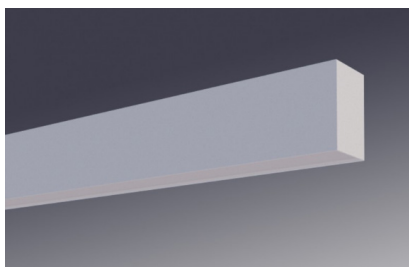
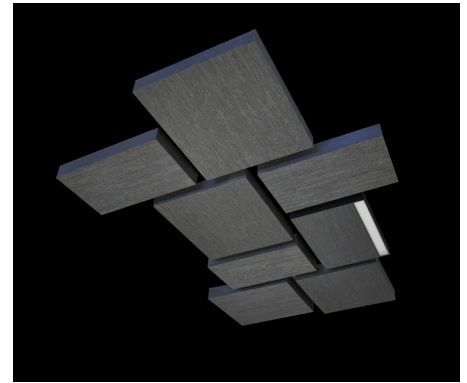


**PRODUCT DESCRIPTION**

Wall or ceiling mounted acoustic panels, with or without the additional linear LEDlines.

Finishes: woven vinyl or HPL (High Pressure Laminate).

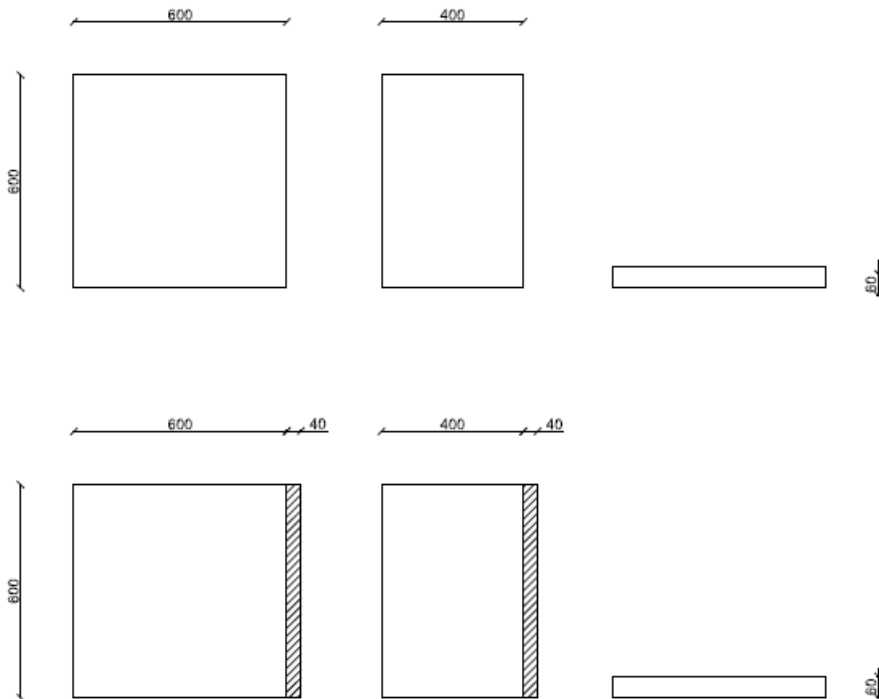

**TECHNICAL DATA**

Application	surface - suspension - wall
Dimensions	600x600x60 mm or 600x400x60mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	21,6W	275mA	2546lm	136 lm/W	90+	D
3000K	20,6W	400mA	2612 lm	146 lm/W	90+	D
4000K	20,6W	400mA	2740 lm	153 lm/W	90+	D

**ORDER REFERENCE**> [FIXTURE](#)**! ORDER REFERENCE + W (white) / B (black)**60x60**Panel** ZUMI40606060 Acoustic panel III - 600x600x60**Panel + linear light****2700K** ZUMI40601880123 Acoustic panel III LLE24 21,6W 2546 lm 275mA CRI90+ 2700K 230V 600x600x60 dim.**3000K** ZUMI40601890119 Acoustic panel III LLE24 20,6W 2612 lm 400mA CRI90+ 3000K 230V 600x600x60 dim.**4000K** ZUMI40601900119 Acoustic panel III LLE24 20,6W 2740 lm 400mA CRI90+ 4000K 230V 600x600x60 dim.60x40**Panel** ZUMI40604060 Acoustic panel III - 600x400x60**Panel + linear light****2700K** ZUMI40401880123 Acoustic panel III LLE24 21,6W 2546 lm 275mA CRI90+ 2700K 230V 600x400x60 dim.**3000K** ZUMI40401890119 Acoustic panel III LLE24 20,6W 2612 lm 400mA CRI90+ 3000K 230V 600x400x60 dim.**4000K** ZUMI40401900119 Acoustic panel III LLE24 20,6W 2740 lm 400mA CRI90+ 4000K 230V 600x400x60 dim.> [OPTIONS](#)**SUSPENSION****10m** ZUMI400PH10M Acoustic panels suspension single 10m**4m** ZUMI400PH4M Acoustic panels suspension single 4m**4m black** ZUMI400PH4MB Acoustic panels suspension single 4m black**BRIDGE**ZUMI401021809B Acoustic panel III - BRIDGE black 297x16x10mm  
(for connecting multiple acoustic panels)