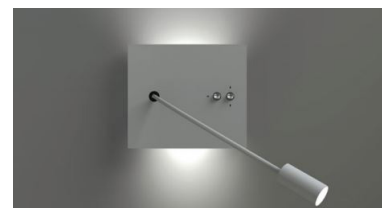



PRODUCT DESCRIPTION

A bedside luminaire with two functions: direct & indirect lighting and reading light. The reading light is attached on a rigid curved arm which is fixed on an intelligent swivel. Two switches are provided to control the two functions separately (on/off)

Aluminium fixture, standard white or black powder coated. RAL on request.

**TECHNICAL DATA**

Application	wall
Dimensions	base: 180 x 160 x 29mm - length arm: 270mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

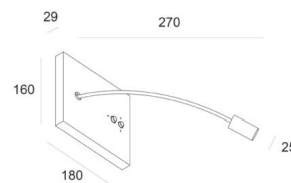

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
Up- and downlight						
2700K	2x 3,5W	350mA	2x 395 lm	133 lm/W	90+	D
3000K	2x 3,5W	350mA	2x 406 lm	138 lm/W	90+	D
4000K	2x 3,5W	350mA	2x 437 lm	145 lm/W	90+	D
Ledspot						
2700K	4W	100mA	420 lm	123 lm/W	90+	E
3000K	4W	100mA	447 lm	131 lm/W	90+	E
4000K	4W	100mA	469 lm	137 lm/W	90+	E

ORDER REFERENCE

> [FIXTURE](#)

! ORDER REFERENCE + W (white) / B (black)

2700K	ZUMI22233+2240101	Bedled LLE 16 2x3,5W 2x395lm +SLE G7 4W 420lm 2700K CRI90+ incl.driver
3000K	ZUMI22234+2250101	Bedled LLE 16 2x3,5W 2x406lm +SLE G7 4W 447lm 3000K CRI90+ incl.driver
4000K	ZUMI22235+2280101	Bedled LLE 16 2x3,5W 2x437lm +SLE G7 4W 469lm 4000K CRI90+ incl.driver

> [Driver](#)

Included, non dimmable.