


PRODUCT DESCRIPTION

Aluminium luminaire with removable and washable stretch canvas for general lighting. Available in different color temperatures, dimmable and non dimmable. Also possible with suspension kit.

TECHNICAL DATA

Application	surface & suspension
Dimensions	Ø 900mm - h: 81 mm
IP rating	IP20
Power	230V
Lifetime L70/B10/65°C	>72000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Wattage	Supply Voltage	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3000K	103W	650mA	13960 lm	158 lm/W	90+	D
4000K	103W	650mA	14856 lm	168 lm/W	90+	C

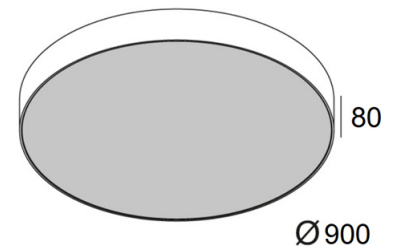**ORDER REFERENCE**

> FIXTURE

! ORDER REFERENCE + (1) **W** (white) / **B** (black)
+ (2) **D** (for dimmable)

SURFACE

3000K	ZUMI1752840101	Circle 900 CLE G2 13960lm 650mA 103W 3000K CRI 90+ incl.driver.
4000K	ZUMI1752850101	Circle 900 CLE G2 14856lm 650mA 103W 4000K CRI 90+ incl. driver

SUSPENSION

3000K	ZUMI175S2840101	Circle 900 SUSPENSION CLE G2 13960lm 650mA 103W 3000K CRI 90+ incl.driver.
4000K	ZUMI175S2850101	Circle 900 SUSPENSION CLE G2 14856lm 650mA 103W 4000K CRI 90+ incl. driver

> CONVERTER

Included, if dimmable: DALI (other on request)

PRODUCT DESCRIPTION

Aluminium luminaire with removable and washable stretch canvas for general lighting. Available in different color temperatures, dimmable and non dimmable. Also possible with suspension kit.


The tunable white version goes from 2700K up to 6500K and is standard dimmable.

TECHNICAL DATA

Application	surface & suspension
Dimensions	Ø 900mm - h: 81 mm
IP rating	IP20
Power	230V
Lifetime L70/B10/65°C	>72000h
MacAdam ellipse	3
Guarantee	5 year



Color Temperature	Wattage	Supply Voltage	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
WW	68,9W	350mA	9400 lm	174 lm/W	90+	A++
CW	68,9W	350mA	10680 lm	199 lm/W	90+	A++

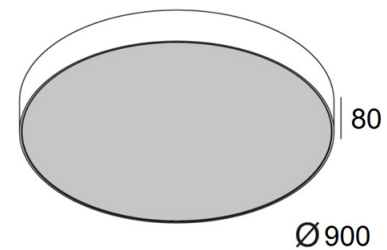

ORDER REFERENCE

> [FIXTURE](#)

! ORDER REFERENCE + (1) W (white) / B (black)

SURFACE

TW ZUMI1752860101 Circle 900 CLE TW 9610lm 350mA 68,9W 2700-6500K CRI 90+ incl. driver

SUSPENSION

TW ZUMI175S2860101 Circle 900 SUSPENSION CLE TW 9610lm 350mA 68,9W 2700-6500K CRI 90+ incl. driver

> [CONVERTER](#)

Included, dimmable: DALI

PRODUCT DESCRIPTION

Aluminium luminaire with removable and washable stretch canvas for general lighting. Available in different color temperatures, dimmable and non dimmable. Also possible with suspension kit.



TECHNICAL DATA

Application	surface & suspension
Dimensions	Ø 1200 x 81 mm
IP rating	IP20
Power	230V
Lifetime L70/B10/65°C	>72000h
MacAdam ellipse	3
Guarantee	5 year




Color Temperature	Wattage	Supply Voltage	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3000K	191,4W	650mA & 450mA	26008 lm	158 lm/W	90+	D
4000K	191,4W	650mA & 450mA	27696 lm	168 lm/W	90+	C

ORDER REFERENCE

> [FIXTURE](#)

! ORDER REFERENCE + (1) **W** (white) / **B** (black)
+ (2) **D** (for dimmable)

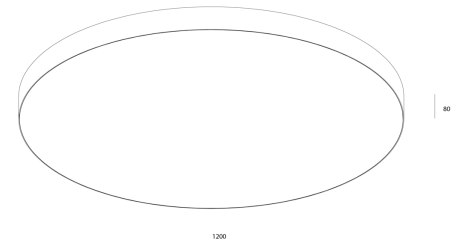

SURFACE

3000K	ZUMI1762840101	Circle 1200 CLE G2 26008lm 650mA 191,4W 3000K CRI 90+ incl.driver
4000K	ZUMI1762850101	Circle 1200 CLE G2 27696lm 650mA 191,4W 4000K CRI 90+ incl. driver

SUSPENSION

3000K	ZUMI176S2840101	Circle 1200 SUSPENSION CLE G2 26008lm 650mA 191,4W 3000K CRI 90+ incl.driver
4000K	ZUMI176S2850101	Circle 1200 SUSPENSION CLE G2 27696lm 650mA 191,4W 4000K CRI 90+ incl. driver

> [CONVERTER](#)

Included, if dimmable: DALI (other on request)

PRODUCT DESCRIPTION

Aluminium luminaire with removable and washable stretch canvas for general lighting. Available in different color temperatures, dimmable and non dimmable. Also possible with suspension kit.


The tunable white version goes from 2700K up to 6500K and is standard dimmable.

TECHNICAL DATA

Application	surface & suspension
Dimensions	Ø 1200 x 81 mm
IP rating	IP20
Power	230V
Lifetime L70/B10/65°C	>72000h
MacAdam ellipse	3
Guarantee	5 year



Color Temperature	Wattage	Supply Voltage	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
WW	123,3W	350mA	16440 lm	172 lm/W	90+	A++
CW	123,3W	350mA	15680 lm	196 lm/W	90+	A++

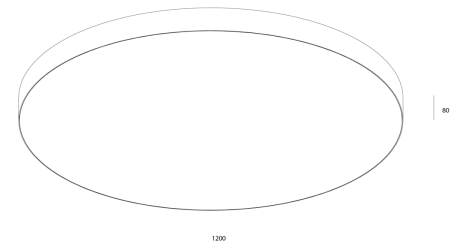

ORDER REFERENCE

> [FIXTURE](#)

! ORDER REFERENCE + (1) W (white) / B (black)

SURFACE

TW ZUMI1762860101 Circle 1200 CLE TW 17020lm 350mA 123,3W 2700-6500K CRI 90+ incl. driver

SUSPENSION

TW ZUMI176S2860101 Circle 1200 SUSPENSION CLE TW 17020lm 350mA 123,3W 2700-6500K CRI 90+ incl. driver

> [CONVERTER](#)

Included, dimmable: DALI