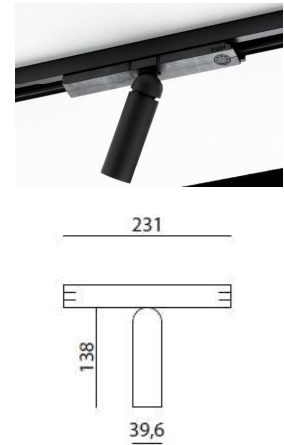


**PRODUCT DESCRIPTION**

PLK on track is a very small and elegant spot for general or accent lighting. The tube, with a diameter of about 40mm and a length of 138mm, is 359° rotatable and 80° inclinable.

Dimmable: only compatible with Global Trac PULSE from Nordic Aluminum and OneTrack from Stucchi.

**TECHNICAL DATA**

Application	3F Track
IP rating	IP20
Power	230V
Lifetime L70/B50/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	8W	200mA	840lm	123 lm/W	90+	E
3000K	8W	200mA	895lm	131 lm/W	90+	E

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE + (1) W (white) / B (black) / G (gold) / T (titanium) / BR (bronze)**  
**(2) DD (Dali dim)**

<b>2700K 10°</b>	ZUMI1202243005	PLK 3F TRACK 10° SLE G7 8W 840lm 2700K CRI90+ incl.driver
<b>2700K 40°</b>	ZUMI1202241205	PLK 3F TRACK 40° SLE G7 8W 840lm 2700K CRI90+ incl.driver
<b>3000K 10°</b>	ZUMI1202253005	PLK 3F TRACK 10° SLE G7 8W 895lm 3000K CRI90+ incl.driver
<b>3000K 40°</b>	ZUMI1202251205	PLK 3F TRACK 40° SLE G7 8W 895lm 3000K CRI90+ incl.driver

> DRIVER included if dimmable, Dali dim ( only for Global Track pulse or Stucchi One track).

**PRODUCT DESCRIPTION**


The PLK is a very small and elegant spot with multiple possibilities. The tube, with a diameter of about 40mm and a length of 138mm, is 359° rotatable and 80° inclinable.

Aluminium luminaire.

**TECHNICAL DATA**

Application	Track (Stucchi)
IP rating	IP20
Power	48V
Lifetime L70/B50/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

(\*on components, only if ordered luminaire + driver)

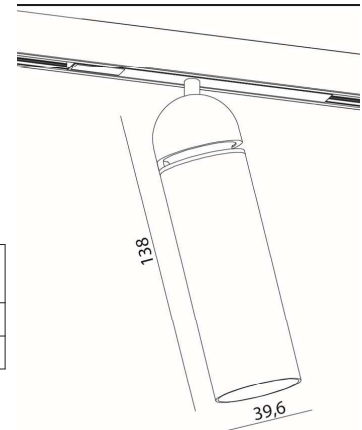

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	6,9W	48V DC	840lm	123 lm/W	90+	E
3000K	6,9W	48V DC	895lm	131 lm/W	90+	E

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE + (1) W (white) / B (black) // G (gold) / T (titanium) / BR (bronze)**  
**(2) DD (Dali dim)**

<b>2700K 10°</b>	ZUMI1172243004	PLK 48V DC 10° SLE G7 6,9W 840lm 2700K CRI90+
<b>2700K 40°</b>	ZUMI1172241204	PLK 48V DC 40° SLE G7 6,9W 840lm 2700K CRI90+
<b>3000K 10°</b>	ZUMI1172253004	PLK 48V DC 10° SLE G7 6,9W 895lm 3000K CRI90+
<b>3000K 40°</b>	ZUMI1172251204	PLK 48V DC 40° SLE G7 6,9W 895lm 3000K CRI90+

> DRIVER (to be placed remoted)

**non dimmable :**

Compact	TRID28001232 TRID28001045	LCU 48V 75W DC-STR FO SR LCU 48V 150W DC-STR FO SR
Linear	TRID28000816 TRID28001234	LCU 48V 75W DC-STR FO Ip LCU 48V 150W DC-STR FO Ip

**dimnable :**

Compact	TRID28001233 TRID28001044	LCU 48V 75W DC-STR DIM SR LCU 48V 150W DC-STR DIM SR
Linear	TRID28000815 TRID28001235	LCU 48V 75W DC-STR DIM Ip LCU 48V 150W DC-STR DIM Ip