

**PRODUCT DESCRIPTION**

PLK SURFACE is a very small and elegant downlighter for general or accent lighting. The tube has a diameter of about 40mm and a height of 138mm. Available in different colors and color temperatures with a lens of 10° or 40°.

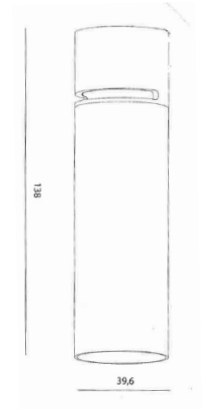
Aluminium luminaire.

**TECHNICAL DATA**

|                       |              |
|-----------------------|--------------|
| Application           | Surface      |
| Dimensions            | 138mm x 40mm |
| IP rating             | IP20         |
| Power                 | 200mA        |
| Lifetime L70/B50/65°C | >60000h      |
| MacAdam ellipse       | 3            |
| Guarantee             | 5 year       |

(\*on components, only if ordered luminaire + **driver**)

| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K             | 6,9W    | 200mA           | 840 lm                     | 123 lm/W                        | 90+ | E            |
| 3000K             | 6,9W    | 200mA           | 895 lm                     | 131 lm/W                        | 90+ | E            |

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE + W (white) / B (black) / G (gold) / T (titanium) / BR (bronze)**

|                  |                |  |
|------------------|----------------|--|
| <b>2700K 10°</b> | ZUMI1732243005 | PLK Surface 10° SLE G7 6,9W 200mA 840lm 2700K CRI90+ ex.driver |
| <b>2700K 40°</b> | ZUMI1732241205 | PLK Surface 40° SLE G7 6,9W 200mA 840lm 2700K CRI90+ ex.driver |
| <b>3000K 10°</b> | ZUMI1732253005 | PLK Surface 10° SLE G7 6,9W 200mA 895lm 3000K CRI90+ ex.driver |
| <b>3000K 40°</b> | ZUMI1732251205 | PLK Surface 40° SLE G7 6,9W 200mA 895lm 3000K CRI90+ ex.driver |

> DRIVER (to be placed remoted)