

PRODUCT DESCRIPTION

The PLK suspension is a very elegant luminaire with a diameter of about 40mm and a length of 138mm.



There are two versions. One with a large base with driver included and one with a small base where the driver has to be remote mounted.

Aluminium luminaire.

TECHNICAL DATA

Application	suspension
Dimensions	base driver inclusive: ø 50mm h 173mm base driver exclusive: ø 50mm h 40mm
IP rating	IP20
Power	230V or 200mA
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire + driver)

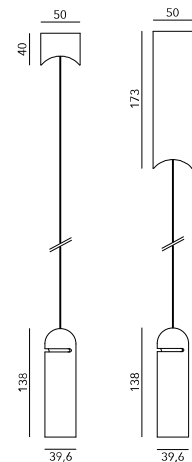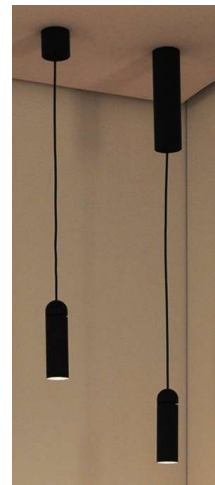

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	8W	230V	840lm	123 lm/W	90+	E
2700K	6,9W	200mA	840lm	123 lm/W	90+	E
3000K	8W	230V	895 lm	131 lm/W	90+	E
3000K	6,9W	200mA	895 lm	131 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + W (white) / B (black) / G (gold) / T (titanium) / BR (bronze)

Inclusive driver (standard DALI DIM)

2700K	ZUMI822243001	PLK Suspension 10° SLE G7 8W 230V 840lm 2700K CRI90+ incl.driver
	ZUMI822241201	PLK Suspension 40° SLE G7 8W 230V 840lm 2700K CRI90+ incl.driver
3000K	ZUMI822253001	PLK Suspension 10° SLE G7 8W 230V 895lm 3000K CRI90+ incl.driver
	ZUMI822251201	PLK Suspension 40° SLE G7 8W 230V 895lm 3000K CRI90+ incl.driver

Exclusive driver

2700K	ZUMI822243005	PLK Suspension 10° SLE G7 6,9W 200mA 840lm 2700K CRI90+ excl.driver
	ZUMI822241205	PLK Suspension 40° SLE G7 6,9W 200mA 840lm 2700K CRI90+ excl.driver
3000K	ZUMI822253005	PLK Suspension 10° SLE G7 6,9W 200mA 895lm 3000K CRI90+ excl.driver
	ZUMI822251205	PLK Suspension 40° SLE G7 6,9W 200mA 895lm 3000K CRI90+ excl.driver

> DRIVER (for small base)

non dimmable

compact

1 PLK	TRID28000698 + PLUG TRID28001104	LC 10W 150-400mA flexC SR EXC
-------	----------------------------------	-------------------------------

linear

1 PLK	TRID28000679 + PLUG TRID28001104	LC 25W 100-500mA flexC Ip EXC
2-3 PLK	TRID28000680 + PLUG TRID28001104	LC 50W 100-400mA flexC Ip EXC
2-6 PLK	TRID28000713 + PLUG TRID28001104	LC 75W 100-400mA flexC Ip EXC

dimmable (DALI, pushDIM)

compact

1 PLK	TRID28000669 + PLUG TRID28001104	LCA 10W 150-400mA flexC SR EXC
-------	----------------------------------	--------------------------------

linear

1 PLK	TRID28000654 + PLUG TRID28001104	LCA 35W 150-700mA one4all Ip PRE
2-3 PLK	TRID28000655 + PLUG TRID28001104	LCA 50W 100-400mA flexC Ip PRE
2-6 PLK	TRID28000657 + PLUG TRID28001104	LCA 75W 100-400mA flexC Ip PRE