

PRODUCT DESCRIPTION

The PLK Tige is a very small and elegant spot mounted on a tige of 400, 600 or 800mm. The tube, with a diameter of about 40mm and a length of 138mm, is 359° rotatable and 80° inclinable.

The PLK Tige has to be configured, first step is to choose a base (single or twin) followed by the different tiges. This way any composition can be made.

Aluminium luminaire.


TECHNICAL DATA

Application	semi- recessed
Dimensions	cut out: built-in base single: 80mm built-in base twin: 121mm
IP rating	IP20
Power	200mA
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire + driver)



Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	6,9W	200mA	840 lm	123 lm/W	90+	E
3000K	6,9W	200mA	895 lm	131 lm/W	90+	E

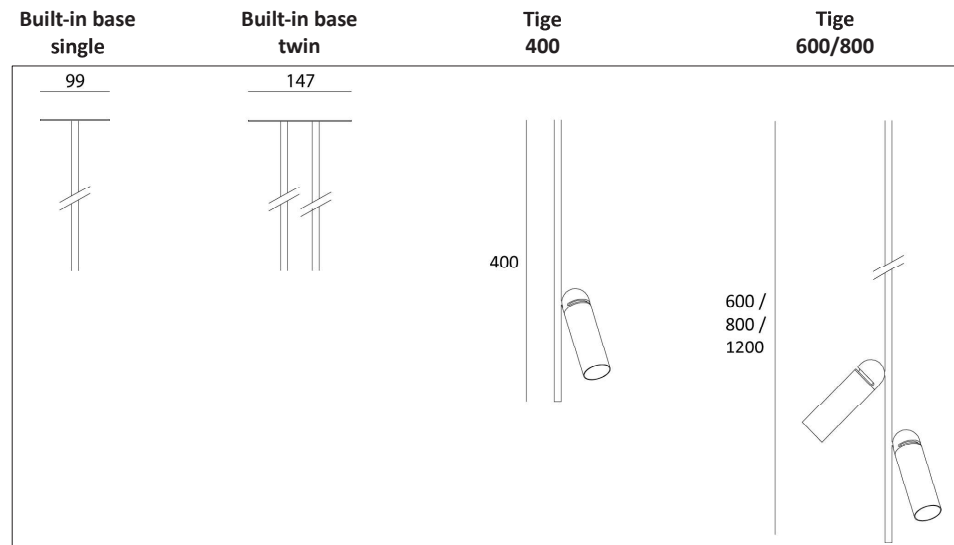

ORDER REFERENCE

> LUMINAIRE

Built-in base (Base & Tige always same colour) : **W** (white) / **B** (black)

Single	ZUMI63SB	Built-in base Single Ø 99mm for PLK on Tige
Double	ZUMI63TB	Built-in base Twin Ø 147mm for PLK on Tige

PLK on Tige : (colour PLK) : **W** (white) / **B** (black) / **G** (gold) / **T** (titanium) / **BR** (bronze)

2700K	400mm (1x PLK)	ZUMI63T224400	Tige 400mm with 1 PLK 40° 6,9W 840lm 2700K
	600mm (2x PLK)	ZUMI63T224600	Tige 600mm with 2 PLK 40° 2x6,9W 2x840lm 2700K
	800mm (2x PLK)	ZUMI63T224800	Tige 800mm with 2 PLK 40° 2x6,9W 2x840lm 2700K
3000K	400mm (1x PLK)	ZUMI63T225400	Tige 400mm with 1 PLK 40° 6,9W 895lm 3000K
	600mm (2x PLK)	ZUMI63T225600	Tige 600mm with 2 PLK 40° 2x6,9W 2x895lm 3000K
	800mm (2x PLK)	ZUMI63T225800	Tige 800mm with 2 PLK 40° 2x6,9W 2x895lm 3000K

> DRIVER*Ceiling mounted***non dimmable**

1 PLK TRID28000698 + PLUG TRID28001104 LC 10W 150-400mA flexC SR EXC

dimmable (DALI, pushDIM)

1 PLK TRID28000669 + PLUG TRID28001104 LCA 10W 150-400mA flexC SR EXC

*Remote mounted***non dimmable**

1 PLK TRID28000679 + PLUG TRID28001104 LC 25W 100-500mA flexC Ip EXC

2-3 PLK TRID28000680 + PLUG TRID28001104 LC 50W 100-400mA flexC Ip EXC

2-6 PLK TRID28000713 + PLUG TRID28001104 LC 75W 100-400mA flexC Ip EXC

dimmable (DALI, pushDIM)

1 PLK TRID28000654 + PLUG TRID28001104 LCA 35W 150-700mA one4all Ip PRE

2-3 PLK TRID28000655 + PLUG TRID28001104 LCA 50W 100-400mA flexC Ip PRE

2-6 PLK TRID28000657 + PLUG TRID28001104 LCA 75W 100-400mA flexC Ip PRE