


PRODUCT DESCRIPTION


A mini version of the slingshot. Spot on track for general or accent lighting with a CRI of >90 for a better color accuracy.

Aluminium luminaire, white or black powder coated, available in different color temperatures, with several possible reflectors (25°, 39°, 61°).

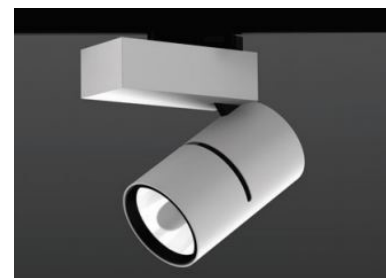

TECHNICAL DATA

Application	3F track
Dimensions	∅ 80mm h 130mm - base 130 x 60 x 40mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

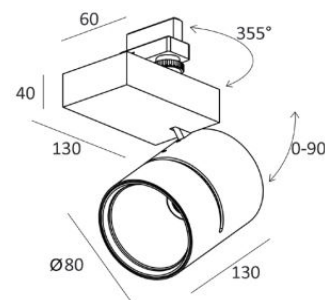

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	19,4W	500mA	2225 lm	134 lm/W	90+	E
3000K	19,4W	500mA	2449 lm	147 lm/W	90+	E
3500K	19,4W	500mA	2474 lm	149 lm/W	90+	E
4000K	19,4W	500mA	2536 lm	152 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

- ! **ORDER REFERENCE** + (1) **W** (white) / **B** (black)
- + (2) **G** (gold reflector) option only for 2700K or 3000K
- + (3) **DD1** (for DALI dim.Eutrac) / **DD2** (for DALI dim. Global) / **PD** (for dimmable phase cut)

2700K

25°	ZUMI252131507	Slingshot Mini 3F SLE G7 2225 lm 500mA 19,4W 2700K CRI90+ 25° incl.driver
39°	ZUMI252131607	Slingshot Mini 3F SLE G7 2225 lm 500mA 19,4W 2700K CRI90+ 39° incl.driver
61°	ZUMI252131707	Slingshot Mini 3F SLE G7 2225 lm 500mA 19,4W 2700K CRI90+ 61° incl.driver

3000K

25°	ZUMI252141507	Slingshot Mini 3F SLE G7 2449lm 500mA 19,4W 3000K CRI90+ 25° incl.driver
39°	ZUMI252141607	Slingshot Mini 3F SLE G7 2449lm 500mA 19,4W 3000K CRI90+ 39° incl.driver
61°	ZUMI252141707	Slingshot Mini 3F SLE G7 2449lm 500mA 19,4W 3000K CRI90+ 61° incl.driver

3500K

25°	ZUMI252151507	Slingshot Mini 3F SLE G7 2474lm 500mA 19,4W 3500K CRI90+ 25° incl.driver
39°	ZUMI252151607	Slingshot Mini 3F SLE G7 2474lm 500mA 19,4W 3500K CRI90+ 39° incl.driver
61°	ZUMI252151707	Slingshot Mini 3F SLE G7 2474lm 500mA 19,4W 3500K CRI90+ 61° incl.driver

4000K

25°	ZUMI252161507	Slingshot Mini 3F SLE G7 2536lm 500mA 19,4W 3000K CRI90+ 25° incl.driver
39°	ZUMI252161607	Slingshot Mini 3F SLE G7 2536lm 500mA 19,4W 3000K CRI90+ 39° incl.driver
61°	ZUMI252161707	Slingshot Mini 3F SLE G7 2536lm 500mA 19,4W 3000K CRI90+ 61° incl.driver

> DRIVER

Included, if dimmable: DALI or phase cut

> OPTIONS

PC-cover	ZUMI2600000500	PC-cover for food environment - ∅ 71
Grid	ZUMI25HC	Honeycomb grid


PRODUCT DESCRIPTION

A mini version of the slingshot equipped with a ledmodule especially to enlighten food products. There's a choice between 'fish' to light up fish products, 'gold' for bakery goods and 'gold+' for rather crusty bakery goods such as croissants and baguettes. The 'meat+' provides a highly red color which is ideal for the presentation of meat. Its 'fresh meat' is suitable to use for meat in the counter. Fruit is ideal for fruit and vegetables.

Aluminium luminaire, white or black powder coated, with several possible reflectors (25°, 39°, 61°). Standard equipped with PC-cover for food environment.

**TECHNICAL DATA**

Application	3F track
Dimensions	∅ 80mm h 130mm - base 130 x 60 x 40mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3 (GOLD+ /FRESH MEAT: 4)
Guarantee	5 year

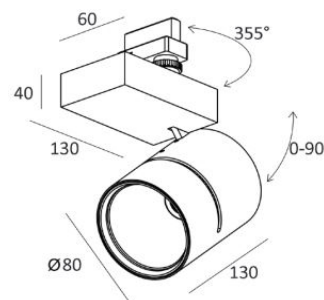

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
FISH	16,9W	500mA	2015 lm	121 lm/W	/	E
GOLD 2700K	16,9W	500mA	1868 lm	112 lm/W	/	E
GOLD+ 2400K	16,9W	500mA	1171 lm	70 lm/W	/	G
MEAT+	16,9W	500mA	1256 lm	75 lm/W	/	n.a
FRESH MEAT	16,9W	500mA	1224 lm	74 lm/W	/	n.a
FRUIT	16,9W	500mA	1748 lm	108 lm/W	/	F

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W** (white) / **B** (black)
 + (2) **G** (gold reflector) option only for GOLD and GOLD+
 + (3) **DD1** (for DALI dim.Eutrac) / **DD2** (for DALI dim. Global) / **PD** (for dimmable phase cut)

FISH

25°	ZUMI252171907	Slingshot Mini 3F Fish SLE G7 2015lm 500mA 19,4W 25°PC incl.driver
39°	ZUMI252172007	Slingshot Mini 3F Fish SLE G7 2015lm 500mA 19,4W 39°PC incl.driver
61°	ZUMI252172107	Slingshot Mini 3F Fish SLE G7 2015lm 500mA 19,4W 61°PC incl.driver

GOLD 2700K

25°	ZUMI252181907	Slingshot Mini 3F Gold SLE G7 1868 lm 500mA 19,4W 2700K 25°PC incl.driver
39°	ZUMI252182007	Slingshot Mini 3F Gold SLE G7 1868 lm 500mA 19,4W 2700K 39°PC incl.driver
61°	ZUMI252182107	Slingshot Mini 3F Gold SLE G7 1868 lm 500mA 19,4W 2700K 61°PC incl.driver

GOLD+ 2400K

25°	ZUMI252081907	Slingshot Mini 3F Gold+ SLE G7 1171 lm 500mA 19,4W 2400K 25°PC incl.driver
39°	ZUMI252082007	Slingshot Mini 3F Gold+ SLE G7 1171 lm 500mA 19,4W 2400K 39°PC incl.driver
61°	ZUMI252082107	Slingshot Mini 3F Gold+ SLE G7 1171 lm 500mA 19,4W 2400K 61°PC incl.driver

MEAT+

25°	ZUMI252191907	Slingshot Mini 3F Meat+ SLE G7 1256lm 500mA 19,4W 25°PC Incl.driver
39°	ZUMI252192007	Slingshot Mini 3F Meat+ SLE G7 1256lm 500mA 19,4W 39°PC incl.driver
61°	ZUMI252192107	Slingshot Mini 3F Meat+ SLE G7 1256lm 500mA 19,4W 61°PC incl.driver

FRESH MEAT

25°	ZUMI252201907	Slingshot Mini 3F Fresh meat SLE G7 1224lm 500mA 19,4W 25°PC incl.driver
39°	ZUMI252202007	Slingshot Mini 3F Fresh meat SLE G7 1224lm 500mA 19,4W 39°PC incl.driver
61°	ZUMI252202107	Slingshot Mini 3F Fresh meat SLE G7 1224lm 500mA 19,4W 61°PC incl.driver

FRUIT

25°	ZUMI252211907	Slingshot Mini 3F Fruit SLE G7 1748lm 500mA 19,4W 25°PC incl.driver
39°	ZUMI252212007	Slingshot Mini 3F Fruit SLE G7 1748lm 500mA 19,4W 39°PC incl.driver
61°	ZUMI252212107	Slingshot Mini 3F Fruit SLE G7 1748lm 500mA 19,4W 61°PC incl.driver

Driver

Included, if dimmable: DALI or phase cut

> OPTIONS

Grid	ZUMI25HC	Honeycomb grid
-------------	----------	----------------

PRODUCT DESCRIPTION


A mini version of the slingshot, Spot on track for general or accent lighting. The art version is with its CRI 98 the perfect solution to enlighten art and musea.

Aluminium luminaire, white or black powder coated, with several possible reflectors (25°, 39°, 61°).



TECHNICAL DATA

Application	3F track
Dimensions	∅ 80mm h 130mm - base 130 x 60 x 40mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	2
Guarantee	5 year

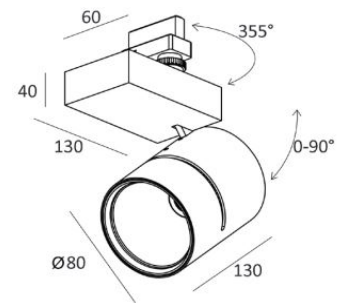

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3100K	19,4W	500mA	1729 lm	104 lm/W	98	F

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W** (white) / **B** (black)
 + (2) **DD1** (for DALI dim.Eutrac) / **DD2** (for DALI dim. Global)/ **PD** (for dimmable phase cut)

3100K

25°	ZUMI252221507	Slingshot Mini 3F Art SLE G7 1729lm 500mA 19,4W 3100K CRI98 25° incl.driver
39°	ZUMI252221607	Slingshot Mini 3F Art SLE G7 1729lm 500mA 19,4W 3100K CRI98 39° incl.driver
61°	ZUMI252221707	Slingshot Mini 3F Art SLE G7 1729lm 500mA 19,4W 3100K CRI98 61° incl.driver

> DRIVER

Included, if dimmable: DALI or phase cut

> OPTIONS

PC-cover	ZUMI2600000500	PC-cover for food environment - ∅ 71
Grid	ZUMI25HC	Honeycomb grid



PRODUCT DESCRIPTION

A mini version of the slingshot, Spot on track for general or accent lighting. The fashion edition has an optimized light spectrum with warm, vibrant colours combined with a pure, shiny white which is ideal for the perfect fashion presentation.

Aluminium luminaire, white or black powder coated, with several possible reflectors (25°, 39°, 61°).

TECHNICAL DATA

Application	3F track
Dimensions	∅ 80mm h 130mm - base 130 x 60 x 40mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

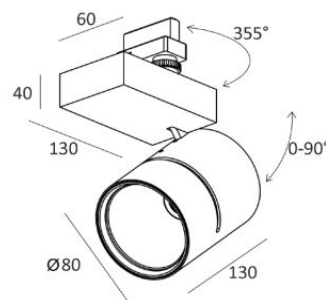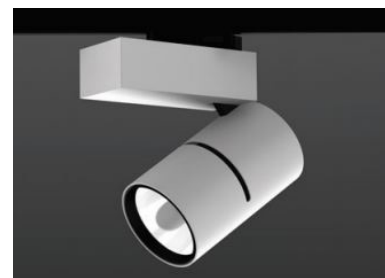

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3250K	19,4W	500mA	1876 lm	136 lm/W	95	F

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W** (white) / **B** (black)

+ (2) **DD1** (for DALI dim.Eutrac) / **DD2** (for DALI dim. Global) / **PD** (for dimmable phase cut)

3250K

25° ZUMI252231507 Slingshot Mini 3F Fashion SLE G7 1876lm 500mA 19,4W 3250K CRI95 25° incl.driver

39° ZUMI252231607 Slingshot Mini 3F Fashion SLE G7 1876lm 500mA 19,4W 3250K CRI95 39° incl.driver

61° ZUMI252231707 Slingshot Mini 3F Fashion SLE G7 1876lm 500mA 19,4W 3250K CRI95 61° incl.driver

> DRIVER

Included, if dimmable: DALI or phase cut

> OPTIONS

PC-cover ZUMI2600000500

PC-cover for food environment - ∅ 71

Grid ZUMI25HC

Honeycomb grid