

PRODUCT DESCRIPTION


Wall luminaire for indirect lighting. Available in different diameters and color temperatures.

*RAL-colors on request

TECHNICAL DATA

| | |
|-----------------------|--------------------------|
| Application | surface |
| Dimensions | ø400 - 600 - 800mm h80mm |
| IP rating | IP20 |
| Power | 24V |
| Lifetime L70/F10/65°C | 72000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |

(*on components, only if ordered luminaire **+driver**)

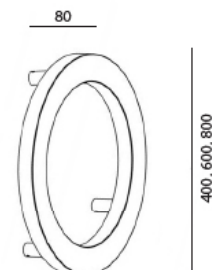

| Color Temperature | Wattage | Supply voltage | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | | | | | | |
| ø400mm | 20,9W | 24V DC | 2236 lm | 108 lm/W | 90+ | F |
| ø600mm | 34,6W | 24V DC | 3696 lm | 108 lm/W | 90+ | F |
| ø800mm | 48,4W | 24V DC | 5179 lm | 108 lm/W | 90+ | F |
| 3000K | | | | | | |
| ø400mm | 19,8W | 24V DC | 2178 lm | 112 lm/W | 90+ | E |
| ø600mm | 32,7W | 24V DC | 3600 lm | 112 lm/W | 90+ | E |
| ø800mm | 45,8W | 24V DC | 5045 lm | 112 lm/W | 90+ | E |
| 4000K | | | | | | |
| ø400mm | 19,8W | 24V DC | 2278 lm | 117 lm/W | 90+ | E |
| ø600mm | 32,7W | 24V DC | 3765 lm | 117lm/W | 90+ | E |
| ø800mm | 45,8W | 24V DC | 5276 lm | 117lm/W | 90+ | E |

ORDER REFERENCE> LUMINAIRE**2700K**

| | | |
|--------|-----------------|--|
| ø400mm | ZUMI1642790103B | The "O" 400 HO 2236lm 24VDC 20,9W 2700K CRI90+ excl.driver black |
| ø600mm | ZUMI1662790103B | The "O" 600 HO 3696lm 24VDC 34,6W 2700K CRI90+ excl.driver black |
| ø800mm | ZUMI1682790103B | The "O" 800 HO 5179lm 24VDC 48,4W 2700K CRI90+ excl.driver black |

3000K

| | | |
|--------|-----------------|--|
| ø400mm | ZUMI1642800103B | The "O" 400 HO 2178lm 24VDC 19,8W 3000K CRI90+ excl.driver black |
| ø600mm | ZUMI1662800103B | The "O" 600 HO 3600lm 24VDC 32,7W 3000K CRI90+ excl.driver black |
| ø800mm | ZUMI1682800103B | The "O" 800 HO 5045lm 24VDC 45,8W 3000K CRI90+ excl.driver black |

4000K

| | | |
|--------|-----------------|--|
| ø400mm | ZUMI1642810103B | The "O" 400 HO 2278lm 24VDC 19,8W 4000K CRI90+ excl.driver black |
| ø600mm | ZUMI1662810103B | The "O" 600 HO 3765lm 24VDC 32,7W 4000K CRI90+ excl.driver black |
| ø800mm | ZUMI1682810103B | The "O" 800 HO 5276lm 24VDC 45,8W 4000K CRI90+ excl.driver black |

> DRIVER - REQUIRED**non dimmable :**

| | | |
|------------------------------------|--------------|---|
| 35W | TRID87500852 | LC 35W 24V SC SNC |
| 60W | TRID87500665 | LC 60W 24V SC SNC |
| 100W | TRID87500666 | LC 100W 24V SC SNC |
| 200W | TRID87500855 | LC 200W 24V SC SNC |
| if dimmable 1-10V : + TRONKAOP1E24 | | fd analog 1-48e (one device for each driver) |

dimmable :

| | | |
|-------------|--------------|-----------------------------|
| 35W | TRID28001662 | LCA 35W 24V one4all SC PRE |
| 60W | TRID28001663 | LCA 60W 24V one4all SC PRE |
| 100W | TRID28001253 | LCA 100W 24V one4all SC PRE |
| 150W | TRID28001437 | LCA 150W 24V one4all SC PRE |


*driver to be placed at max. 10m of the luminaire!

PRODUCT DESCRIPTION

Wall luminaire for indirect lighting. Available in different diameters.
The RGB version tunes up the space with its possibility of color mixing.

TECHNICAL DATA

| | |
|---|-------------------------------|
| Application | surface |
| Dimensions | ø400 - 600 - 800mm h80mm |
| IP rating | IP20 |
| Power | 24V (4 wires: R,G,B + common) |
| Lifetime L70/F10/65°C | 50000h |
| MacAdam ellipse | 4 |
| Guarantee | 5 year |
| (*on components, only if ordered luminaire +driver) | |

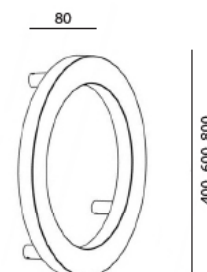

| Color Temperature | Wattage | Supply voltage | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | Energy Label |
|-------------------|---------|----------------|----------------------------|---------------------------------|--------------|
| RGB | | | | | |
| ø400mm | 30,2W | 24V DC | 1071 lm | 35 lm/W | A |
| ø600mm | 47,5W | 24V DC | 1683 lm | 35 lm/W | A |
| ø800mm | 66,2W | 24V DC | 2346 lm | 35 lm/W | A |

ORDER REFERENCE

> LUMINAIRE

RGB

| | | |
|--------|-----------------|--|
| ø400mm | ZUMI1641390103B | The "O" 400 RGB 1071lm 24VDC 30,3W excl.driver black |
| ø600mm | ZUMI1661390103B | The "O" 600 RGB 1683lm 24VDC 47,5W excl.driver black |
| ø800mm | ZUMI1681390103B | The "O" 800 RGB 2346lm 24VDC 66,2W excl.driver black |

*RAL-colors on request

> Driver + DIMMODULE - **REQUIRED**

Driver

| | | |
|-------------|--------------|---------------------|
| 35W | TRID28000411 | LCU 35W 24V TOP SR |
| 60W | TRID28000412 | LCU 60W 24V TOP SR |
| 96W | TRID28000413 | LCU 96W 24V TOP SR |
| 180W | TRID28000414 | LCU 180W 24V TOP SR |


*driver placed at max. 10m of the luminaire!

+ DIMMODULE (one device for each driver)

| | | |
|------------------------------------|---------------|-----------------|
| DALI | FENOK00004027 | fd dali 3-48e |
| 1-10V for potentiometers | TRONK00004025 | fd analog 3-48e |
| 1-10V for looping + dimming | FENOK00004081 | fd sequencer |


PRODUCT DESCRIPTION

Wall luminaire for indirect lighting. Available in different diameters.
The tunable white version has a color range from 2400K up to 6500K.

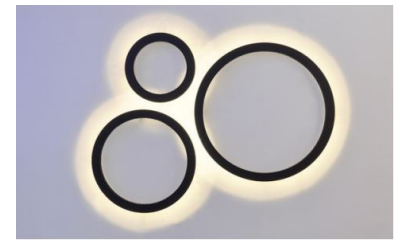

TECHNICAL DATA

Application surface
 Dimensions \varnothing 400 - 600 - 800mm h80mm
 IP rating IP20
 Power 24V
 Lifetime L70/F10/65°C 35000h
 MacAdam ellipse 4
 Guarantee 5 year
 (*on components, only if ordered luminaire **+driver**)



| Color Temperature | Wattage | Supply voltage | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|---------------------|---------|----------------|----------------------------|---------------------------------|-----|--------------|
| 2400K-6500K | | | | | | |
| \varnothing 400mm | 30,7W | 24V DC | 1780 lm | 58 lm/W | 90+ | A |
| \varnothing 600mm | 48,0W | 24V DC | 2781 lm | 58 lm/W | 90+ | A |
| \varnothing 800mm | 66,3W | 24V DC | 3838 lm | 58 lm/W | 90+ | A |

ORDER REFERENCE

> LUMINAIRE

TW

\varnothing 400mm ZUMI1641400103B The "O" 400 TW 1780lm 24VDC 30,7W 2400K-6500K CRI90+ black
 \varnothing 600mm ZUMI1661400103B The "O" 600 TW 2781lm 24VDC 48W 2400K-6500K CRI90+ black
 \varnothing 800mm ZUMI1681400103B The "O" 800 TW 3838lm 24VDC 66,3W 2400K-6500K CRI90+ black

*RAL-colors on request

> Driver + DIMMODULE - REQUIRED

Driver

35W TRID28000411 LCU 35W 24V TOP SR
60W TRID28000412 LCU 60W 24V TOP SR
96W TRID28000413 LCU 96W 24V TOP SR
180W TRID28000414 LCU 180W 24V TOP SR

*driver placed at max. 10m of the luminaire!

+ DIMMODULE (one device for each driver)

DALI LUNA89453836 DALI CC-WW PWM
1-10V TRONK00004025 fd analog 3-48e


PRODUCT DESCRIPTION

Wall luminaire for indirect lighting. Available in different diameters.
A combination made of the RGB and the monochrome version (2700 or 3000K).



TECHNICAL DATA

Application surface
 Dimensions ø400 - 600 - 800mm h80mm
 IP rating IP20
 Power 24V
 Lifetime L70/F10/65°C 50000h
 MacAdam ellipse 2700K-3000K: 3
 Guarantee 5 year
 (*on components, only if ordered luminaire **+driver**)



| Color Temperature | Wattage | Supply voltage | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|----------------|----------------------------|---------------------------------|-----|--------------|
| RGB | | | | | | |
| ø400mm | 17,3W | 24V DC | 612 lm | 35 lm/W | / | A |
| ø600mm | 25,9W | 24V DC | 918 lm | 35 lm/W | / | A |
| ø800mm | 36,0W | 24V DC | 1275 lm | 35 lm/W | / | A |
| 2700K | | | | | | |
| ø400mm | 19,4W | 24V DC | 1656 lm | 95 lm/W | 90+ | F |
| ø600mm | 33,9W | 24V DC | 2898 lm | 95 lm/W | 90+ | F |
| ø800mm | 48,4W | 24V DC | 4140 lm | 95 lm/W | 90+ | F |

ORDER REFERENCE

> LUMINAIRE

RGB-W

ø400mm ZUMI164139W0103B The "O" 400 RGBW 2268lm 24VDC 36,7W 2700K CRI90+ excl.driver black
ø600mm ZUMI166139W0103B The "O" 600 RGBW 3816lm 24VDC 59,8W 2700K CRI90+ excl.driver black
ø800mm ZUMI168139W0103B The "O" 800 RGBW 5415lm 24VDC 84,4W 2700K CRI90+ excl.driver black

**3000K on request*

> Driver + DIMMODULE - REQUIRED

Driver

60W TRID28000412 LCU 60W 24V TOP SR
96W TRID28000413 LCU 96W 24V TOP SR
180W TRID28000414 LCU 180W 24V TOP SR

**driver placed at max. 10m of the luminaire!*

+ DIMMODULE (one device for each driver)

DALI FENOK00004027 fd dali 3-48e
1-10V for potentiometers TRONK00004025 fd analog 3-48e
1-10V for looping + dimming FENOK00004081 fd sequencer