

**PRODUCT DESCRIPTION**

Pendant for general or accent lighting.  
Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

Application	Suspension
Dimensions	ø 450mm h 123mm
IP rating	IP20
Power	230V or 350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(\*on components, only if ordered luminaire **+driver**)



Color Temperature	Wattage excl. driver	Wattage incl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
<b>350mA</b>							
2700K	11,8W	13,6W	350mA	1558 lm	134 lm/W	90+	E
	16,9W	19,4W	500mA	2225 lm	134 lm/W	90+	E
3000K	11,8W	13,6W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	19,4W	500mA	2449 lm	147 lm/W	90+	E

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE** + (1) Tubb: **W** (white) / **B** (black) / **G** (gold) / **F** (forest)  
+ (2) Acoustic Disc: **C** (Coffee) / **B** (Tinged with Beige) / **YR** (Tinged with Yellow Red) / **NB** (Night Blue)  
+ (3) **G** (gold reflector)

**DRIVER INCLUDED - 350mA - non dimmable**

**2700K**

14°	ZUMI682132306	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 14° glass incl. driver
25°	ZUMI682132406	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 25° glass incl. driver
39°	ZUMI682132506	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 39° glass incl. driver
61°	ZUMI682132606	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 61° glass incl. driver

**3000K**

14°	ZUMI682142306	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 14° glass incl. driver
25°	ZUMI682142406	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 25° glass incl. driver
39°	ZUMI682142506	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 39° glass incl. driver
61°	ZUMI682142606	Tubb Silenti 450 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 61° glass incl. driver

**DRIVER EXCLUDED - 350mA/500mA**

**2700K**

14°	ZUMI682132317	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI682132417	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI682132517	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI682132617	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

**3000K**

14°	ZUMI682142317	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI682142417	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI682142517	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI682142617	Tubb Silenti 450 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

> REQUIREMENTS**Round base**ZUMIPD801 (+ W / B)      Round base  $\varnothing$  80**3F Adapter***Non dimmable*350mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

*Dimmable*350mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

> OPTIONS**Honeycomb grid**

ZUMI25HC      Honeycomb grid


**PRODUCT DESCRIPTION**

Pendant for general or accent lighting.  
Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

Application	Suspension
Dimensions	∅ 600mm h 123mm
IP rating	IP20
Power	230V or 350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(\*on components, only if ordered luminaire **+driver**)



Color Temperature	Wattage excl. driver	Wattage incl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
<b>350mA</b>							
2700K	11,8W	13,6W	350mA	1558 lm	134 lm/W	90+	F
	16,9W	19,4W	500mA	2225 lm	134 lm/W	90+	F
3000K	11,8W	13,6W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	19,4W	500mA	2449 lm	147 lm/W	90+	E

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE** + (1) Tubb: **W** (white) / **B** (black) / **G** (gold) / **F** (forest)  
+ (2) Acoustic Disc: **C** (Coffee) / **B** (Tinged with Beige) / **YR** (Tinged with Yellow Red) / **NB** (Night Blue)  
+ (3) **G** (gold reflector)

**DRIVER INCLUDED - 350mA - non dimmable****2700K**

14°	ZUMI692132306	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 14° glass incl. driver
25°	ZUMI692132406	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 25° glass incl. driver
39°	ZUMI692132506	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 39° glass incl. driver
61°	ZUMI692132606	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 61° glass incl. driver

**3000K**

14°	ZUMI692142306	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 14° glass incl. driver
25°	ZUMI692142406	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 25° glass incl. driver
39°	ZUMI692142506	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 39° glass incl. driver
61°	ZUMI692142606	Tubb Silenti 600 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 61° glass incl. driver

**DRIVER EXCLUDED - 350mA/500mA****2700K**

14°	ZUMI692132317	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI692132417	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI692132517	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI692132617	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

**3000K**

14°	ZUMI692142317	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI692142417	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI692142517	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI692142617	Tubb Silenti 600 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

> REQUIREMENTS**Round base**

ZUMIPD801 (+ W / B)

Round base  $\varnothing$  80**3F Adapter***Non dimmable*350mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

*Dimmable*350mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

> OPTIONS**Honeycomb grid**

ZUMI25HC

Honeycomb grid


**PRODUCT DESCRIPTION**

Pendant for general or accent lighting.  
Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

Application	Suspension
Dimensions	∅ 800mm h 123mm
IP rating	IP20
Power	230V or 350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(\*on components, only if ordered luminaire **+driver**)

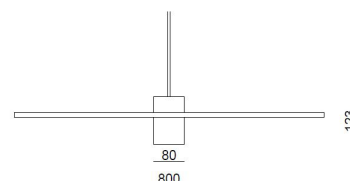

Color Temperature	Wattage excl. driver	Wattage incl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
<b>350mA</b>							
2700K	11,8W	13,6W	350mA	1558 lm	134 lm/W	90+	F
	16,9W	19,4W	500mA	2225 lm	134 lm/W	90+	F
3000K	11,8W	13,6W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	19,4W	500mA	2449 lm	147 lm/W	90+	E

**ORDER REFERENCE**

> [LUMINAIRE](#)

**! ORDER REFERENCE** + (1) Tubb: **W** (white) / **B** (black) / **G** (gold) / **F** (forest)  
+ (2) Acoustic Disc: **C** (Coffee) / **B** (Tinged with Beige) / **YR** (Tinged with Yellow Red) / **NB** (Night Blue)  
+ (3) **G** (gold reflector)

**DRIVER INCLUDED - 350mA - non dimmable****2700K**

14°	ZUMI702132306	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 14° glass incl. driver
25°	ZUMI702132406	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 25° glass incl. driver
39°	ZUMI702132506	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 39° glass incl. driver
61°	ZUMI702132606	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 61° glass incl. driver

**3000K**

14°	ZUMI702142306	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 14° glass incl. driver
25°	ZUMI702142406	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 25° glass incl. driver
39°	ZUMI702142506	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 39° glass incl. driver
61°	ZUMI702142606	Tubb Silenti 800 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 61° glass incl. driver

**DRIVER EXCLUDED - 350mA/500mA****2700K**

14°	ZUMI702132317	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI702132417	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI702132517	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI702132617	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

**3000K**

14°	ZUMI702142317	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI702142417	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI702142517	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI702142617	Tubb Silenti 800 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

> REQUIREMENTS**Round base**ZUMIPD801 (+ W / B)      Round base  $\varnothing$  80**3F Adapter***Non dimmable*350mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

*Dimmable*350mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

> OPTIONS**Honeycomb grid**

ZUMI25HC      Honeycomb grid


**PRODUCT DESCRIPTION**

Pendant for general or accent lighting.  
Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

Application	Suspension
Dimensions	∅ 1200mm h 123mm
IP rating	IP20
Power	230V or 350mA / 500mA
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(\*on components, only if ordered luminaire **+driver**)



Color Temperature	Wattage excl. driver	Wattage incl. driver	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
<b>350mA</b>							
2700K	11,8W	13,6W	350mA	1558 lm	134 lm/W	90+	F
	16,9W	19,4W	500mA	2225 lm	134 lm/W	90+	F
3000K	11,8W	13,6W	350mA	1714 lm	147 lm/W	90+	E
	16,9W	19,4W	500mA	2449 lm	147 lm/W	90+	E

**ORDER REFERENCE**

> [LUMINAIRE](#)

**! ORDER REFERENCE** + (1) Tubb: **W** (white) / **B** (black) / **G** (gold) / **F** (forest)  
+ (2) Acoustic Disc: **C** (Coffee) / **B** (Tinged with Beige) / **YR** (Tinged with Yellow Red) / **NB** (Night Blue)  
+ (3) **G** (gold reflector)

**DRIVER INCLUDED - 350mA - non dimmable****2700K**

14°	ZUMI712132306	Tubb Silenti 1200 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 14° glass incl. driver
25°	ZUMI712132406	Tubb Silenti 1200 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 25° glass incl. driver
39°	ZUMI712132506	Tubb Silenti 1200 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 39° glass incl. driver
61°	ZUMI712132606	Tubb Silenti 1200 CRI90+ SLE G7 13,6W 350mA 1558 lm 2700K 61° glass incl. driver

**3000K**

14°	ZUMI712142306	Tubb Silenti 1200 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 14° glass incl. driver
25°	ZUMI712142406	Tubb Silenti 1200 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 25° glass incl. driver
39°	ZUMI712142506	Tubb Silenti 1200 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 39° glass incl. driver
61°	ZUMI712142606	Tubb Silenti 1200 CRI90+ SLE G7 13,6W 350mA 1714 lm 3000K 61° glass incl. driver

**DRIVER EXCLUDED - 350mA/500mA****2700K**

14°	ZUMI712132317	Tubb Silenti 1200 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver
25°	ZUMI712132417	Tubb Silenti 1200 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver
39°	ZUMI712132517	Tubb Silenti 1200 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver
61°	ZUMI712132617	Tubb Silenti 1200 CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver

**3000K**

14°	ZUMI712142317	Tubb Silenti 1200 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver
25°	ZUMI712142417	Tubb Silenti 1200 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver
39°	ZUMI712142517	Tubb Silenti 1200 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver
61°	ZUMI712142617	Tubb Silenti 1200 CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver

> REQUIREMENTS**Round base**ZUMIPD801 (+ W / B)      Round base  $\varnothing$  80**3F Adapter***Non dimmable*350mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500789	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500787	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

*Dimmable*350mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001110	I-SELECT 2 PLUG 350MA B

500mA

white	TRID87500909	Intrack driver LC 25W 350-600mA o4a T EXC3 white
black	TRID87500908	Intrack driver LC 25W 350-600mA o4a T EXC3 black
+	TRID28001114	I-SELECT 2 PLUG 500MA BL

> OPTIONS**Honeycomb grid**

ZUMI25HC      Honeycomb grid