

**PRODUCT DESCRIPTION**


Trimless double downlighter for general or accent lighting. Available in a version for stretch ceiling and false ceiling.

Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

|                       |  |
|-----------------------|--|
| Application           | Recessed   |
| Dimensions            | visible dimensions: 154x307mm<br>Tubb: ø80mm h80mm |
| IP rating             | IP20   |
| Power                 | 350mA / 500mA                                      |
| Lifetime L70/F10/65°C | >55000h  |
| MacAdam ellipse       | 3  |
| Guarantee             | 5 year   |

(\*on components, only if ordered luminaire **+driver**)

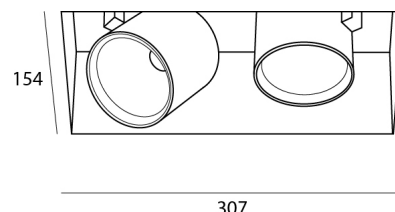

| Color Temperature | Wattage excl. driver | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|----------------------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K             | 2x11,8W              | 350mA           | 2x1558 lm                  | 134 lm/W                        | 90+ | E            |
|                   | 2x16,9W              | 500mA           | 2x2225 lm                  | 134 lm/W                        | 90+ | E            |
| 3000K             | 2x11,8W              | 350mA           | 2x1714 lm                  | 147 lm/W                        | 90+ | E            |
|                   | 2x16,9W              | 500mA           | 2x2449 lm                  | 147 lm/W                        | 90+ | E            |
| 3500K             | 2x11,8W              | 350mA           | 2x1732 lm                  | 149 lm/W                        | 90+ | E            |
|                   | 2x16,9W              | 500mA           | 2x2474 lm                  | 149 lm/W                        | 90+ | E            |
| 4000K             | 2x11,8W              | 350mA           | 2x1775 lm                  | 152 lm/W                        | 90+ | E            |
|                   | 2x16,9W              | 500mA           | 2x2536 lm                  | 152 lm/W                        | 90+ | E            |

**ORDER REFERENCE**

> [LUMINAIRE](#)

**! ORDER REFERENCE** + (1) **W** (white) / **B** (black)  
+ (2) **G** (gold reflector) option only for 2700K or 3000K

**STRETCH CEILING****2700K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI752132317 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1558/2225 lm 2700K 14° glass excl. driver |
| 25° | ZUMI752132417 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1558/2225 lm 2700K 25° glass excl. driver |
| 39° | ZUMI752132517 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1558/2225 lm 2700K 39° glass excl. driver |
| 61° | ZUMI752132617 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1558/2225 lm 2700K 61° glass excl. driver |

**3000K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI752142317 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1714/2449 lm 3000K 14° glass excl. driver |
| 25° | ZUMI752142417 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1714/2449 lm 3000K 25° glass excl. driver |
| 39° | ZUMI752142517 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1714/2449 lm 3000K 39° glass excl. driver |
| 61° | ZUMI752142617 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1714/2449 lm 3000K 61° glass excl. driver |

**3500K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI752152317 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1732/2474 lm 3500K 14° glass excl. driver |
| 25° | ZUMI752152417 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1732/2474 lm 3500K 25° glass excl. driver |
| 39° | ZUMI752152517 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1732/2474 lm 3500K 39° glass excl. driver |
| 61° | ZUMI752152617 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1732/2474 lm 3500K 61° glass excl. driver |

**4000K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI752162317 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1775/2536 lm 4000K 14° glass excl. driver |
| 25° | ZUMI752162417 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1775/2536 lm 4000K 25° glass excl. driver |
| 39° | ZUMI752162517 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1775/2536 lm 4000K 39° glass excl. driver |
| 61° | ZUMI752162617 | Tubb Trimless Double SC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1775/2536 lm 4000K 61° glass excl. driver |

*FALSE CEILING -recessed kit to be ordered separately !*

**2700K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI762132317 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1558/2225 lm 2700K 14° glass excl. driver |
| 25° | ZUMI762132417 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1558/2225 lm 2700K 25° glass excl. driver |
| 39° | ZUMI762132517 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1558/2225 lm 2700K 39° glass excl. driver |
| 61° | ZUMI762132617 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1558/2225 lm 2700K 61° glass excl. driver |

**3000K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI762142317 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1714/2449 lm 3000K 14° glass excl. driver |
| 25° | ZUMI762142417 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1714/2449 lm 3000K 25° glass excl. driver |
| 39° | ZUMI762142517 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1714/2449 lm 3000K 39° glass excl. driver |
| 61° | ZUMI762142617 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1714/2449 lm 3000K 61° glass excl. driver |

**3500K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI762152317 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1732/2474 lm 3500K 14° glass excl. driver |
| 25° | ZUMI762152417 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1732/2474 lm 3500K 25° glass excl. driver |
| 39° | ZUMI762152517 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1732/2474 lm 3500K 39° glass excl. driver |
| 61° | ZUMI762152617 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1732/2474 lm 3500K 61° glass excl. driver |

**4000K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI762162317 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1775/2536 lm 4000K 14° glass excl. driver |
| 25° | ZUMI762162417 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1775/2536 lm 4000K 25° glass excl. driver |
| 39° | ZUMI762162517 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1775/2536 lm 4000K 39° glass excl. driver |
| 61° | ZUMI762162617 | Tubb Trimless Double FC CRI90+ SLE G7 2x11,8/16,9W 350/500mA 2x1775/2536 lm 4000K 61° glass excl. driver |

> REQUIREMENTS**False ceiling recessed kit**

|         |                                      |
|---------|--------------------------------------|
| ZUMIFB2 | Tubb Trimless Double FC recessed kit |
|---------|--------------------------------------|

> DRIVER**dimnable**

|    |              |  |
|----|--------------|--|
| 2x | TRID28000671 | LCA 25W 350-1050mA one4all SR PRE (DALI, DSI, switchDIM) |
| 2x | TRID28001110 | PLUG 350mA   |
|    | or           |  |
| 2x | TRID28001114 | PLUG 500mA   |

**non dimnable**

|    |              |                                |
|----|--------------|--------------------------------|
| 2x | TRID28000700 | LC 25W 350-1050mA flexC SR EXC |
| 2x | TRID28001110 | PLUG 350mA                     |
|    | or           |                                |
| 2x | TRID28001114 | PLUG 500mA                     |

> OPTIONS

|          |                |
|----------|----------------|
| ZUMI25HC | Honeycomb grid |
|----------|----------------|

**PRODUCT DESCRIPTION**

Trimless double downlighter for general or accent lighting equipped with a LEDmodule especially to enlighten several food products. There's a choice between 'fish' to light up fish products, 'gold' for bakery goods and 'gold+' for rather crusty bakery goods such as croissants and baguettes.

The cannon 'meat+' provides a highly red color which is ideal for the presentation of meat.


Its 'fresh meat' is suitable to use for meat in the counter. Fruit is ideal for fruit and vegetables. Available in a version for stretch ceiling and false ceiling.

Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

|                       |  |
|-----------------------|--|
| Application           | Recessed   |
| Dimensions            | visible dimensions: 154x307mm<br>Tubb: ø80mm h80mm |
| IP rating             | IP20   |
| Power                 | 350mA / 500mA                                      |
| Lifetime L70/F10/65°C | >55000h  |
| MacAdam ellipse       | 3  |
| Guarantee             | 5 year   |

(\*on components, only if ordered luminaire **+driver**)

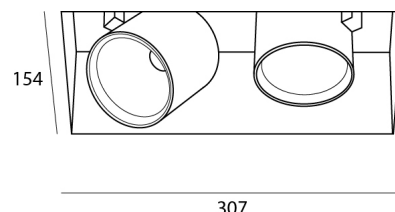

| Color Temperature | Wattage excl. driver | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|----------------------|-----------------|----------------------------|---------------------------------|-----|--------------|
| FISH              | 2x11,8W              | 350mA           | 2x1411 lm                  | 121 lm/W                        | /   | E            |
|                   | 2x16,9W              | 500mA           | 2x2015 lm                  | 121 lm/W                        | /   | E            |
| GOLD 2700K        | 2x11,8W              | 350mA           | 2x1308 lm                  | 112 lm/W                        | /   | E            |
|                   | 2x16,9W              | 500mA           | 2x1868 lm                  | 112 lm/W                        | /   | E            |
| GOLD+ 2400K       | 2x11,8W              | 350mA           | 2x826 lm                   | 73 lm/W                         | /   | F            |
|                   | 2x16,9W              | 500mA           | 2x1171 lm                  | 70 lm/W                         | /   | F            |
| MEAT+             | 2x11,8W              | 350mA           | 2x879 lm                   | 75 lm/W                         | /   | n.a          |
|                   | 2x16,9W              | 500mA           | 2x1256 lm                  | 75 lm/W                         | /   | n.a          |
| FRESH MEAT        | 2x11,8W              | 350mA           | 2x857 lm                   | 74 lm/W                         | /   | n.a          |
|                   | 2x16,9W              | 500mA           | 2x1224 lm                  | 74 lm/W                         | /   | n.a          |
| FRUIT             | 2x11,8W              | 350mA           | 2x1224 lm                  | 105 lm/W                        | /   | F            |
|                   | 2x16,9W              | 500mA           | 2x1748 lm                  | 105 lm/W                        | /   | F            |

**ORDER REFERENCE**

> [LUMINAIRE](#)

**! ORDER REFERENCE** + (1) **W** (white) / **B** (black)

+ (2) **G** (gold reflector) option only for Gold 2700K

**STRETCH CEILING****FISH**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI752173117 | Tubb Trimless Double SC Fish SLE G7 2x11,8/16,9W 350/500mA 2x1411/2015 lm 14° PC excl. driver |
| 25° | ZUMI752171917 | Tubb Trimless Double SC Fish SLE G7 2x11,8/16,9W 350/500mA 2x1411/2015 lm 25° PC excl. driver |
| 39° | ZUMI752172017 | Tubb Trimless Double SC Fish SLE G7 2x11,8/16,9W 350/500mA 2x1411/2015 lm 39° PC excl. driver |
| 61° | ZUMI752172117 | Tubb Trimless Double SC Fish SLE G7 2x11,8/16,9W 350/500mA 2x1411/2015 lm 61° PC excl. driver |

**GOLD 2700K**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI752183117 | Tubb Trimless Double SC Gold SLE G7 2x11,8/16,9W 350/500mA 2x1308/1868 lm 2700K 14° PC excl. driver |
| 25° | ZUMI752181917 | Tubb Trimless Double SC Gold SLE G7 2x11,8/16,9W 350/500mA 2x1308/1868 lm 2700K 25° PC excl. driver |
| 39° | ZUMI752182017 | Tubb Trimless Double SC Gold SLE G7 2x11,8/16,9W 350/500mA 2x1308/1868 lm 2700K 39° PC excl. driver |
| 61° | ZUMI752182117 | Tubb Trimless Double SC Gold SLE G7 2x11,8/16,9W 350/500mA 2x1308/1868 lm 2700K 61° PC excl. driver |

**GOLD+ 2400K**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI752083117 | Tubb Trimless Double SC Gold+ SLE G7 2x11,8/16,9W 350/500mA 2x826/1171 lm 2400K 14° PC excl. driver |
| 25° | ZUMI752081917 | Tubb Trimless Double SC Gold+ SLE G7 2x11,8/16,9W 350/500mA 2x826/1171 lm 2400K 25° PC excl. driver |
| 39° | ZUMI752082017 | Tubb Trimless Double SC Gold+ SLE G7 2x11,8/16,9W 350/500mA 2x826/1171 lm 2400K 39° PC excl. driver |
| 61° | ZUMI752082117 | Tubb Trimless Double SC Gold+ SLE G7 2x11,8/16,9W 350/500mA 2x826/1171 lm 2400K 61° PC excl. driver |

**MEAT+**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI752193117 | Tubb Trimless Double SC Meat+ SLE G7 2x11,8/16,9W 350/500mA 2x879/1256 lm 14° PC excl. driver |
| 25° | ZUMI752191917 | Tubb Trimless Double SC Meat+ SLE G7 2x11,8/16,9W 350/500mA 2x879/1256 lm 25° PC excl. driver |
| 39° | ZUMI752192017 | Tubb Trimless Double SC Meat+ SLE G7 2x11,8/16,9W 350/500mA 2x879/1256 lm 39° PC excl. driver |
| 61° | ZUMI752192117 | Tubb Trimless Double SC Meat+ SLE G7 2x11,8/16,9W 350/500mA 2x879/1256 lm 61° PC excl. driver |

**FRESH MEAT**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI752203117 | Tubb Trimless Double SC Fresh Meat SLE G7 2x11,8/16,9W 350/500mA 2x857/1224 lm 14° PC excl. driver |
| 25° | ZUMI752201917 | Tubb Trimless Double SC Fresh Meat SLE G7 2x11,8/16,9W 350/500mA 2x857/1224 lm 25° PC excl. driver |
| 39° | ZUMI752202017 | Tubb Trimless Double SC Fresh Meat SLE G7 2x11,8/16,9W 350/500mA 2x857/1224 lm 39° PC excl. driver |
| 61° | ZUMI752202117 | Tubb Trimless Double SC Fresh Meat SLE G7 2x11,8/16,9W 350/500mA 2x857/1224 lm 61° PC excl. driver |

**FRUIT**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI752213117 | Tubb Trimless Double SC Fruit SLE G7 2x11,8/16,9W 350/500mA 2x1224/1748 lm 14° PC excl. driver |
| 25° | ZUMI752211917 | Tubb Trimless Double SC Fruit SLE G7 2x11,8/16,9W 350/500mA 2x1224/1748 lm 25° PC excl. driver |
| 39° | ZUMI752212017 | Tubb Trimless Double SC Fruit SLE G7 2x11,8/16,9W 350/500mA 2x1224/1748 lm 39° PC excl. driver |
| 61° | ZUMI752212117 | Tubb Trimless Double SC Fruit SLE G7 2x11,8/16,9W 350/500mA 2x1224/1748 lm 61° PC excl. driver |

*FALSE CEILING -recessed kit to be ordered separately !*

**FISH**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI762173117 | Tubb Trimless Double FC Fish SLE G7 2x11,8/16,9W 350/500mA 2x1411/2015 lm 14° PC excl. driver |
| 25° | ZUMI762171917 | Tubb Trimless Double FC Fish SLE G7 2x11,8/16,9W 350/500mA 2x1411/2015 lm 25° PC excl. driver |
| 39° | ZUMI762172017 | Tubb Trimless Double FC Fish SLE G7 2x11,8/16,9W 350/500mA 2x1411/2015 lm 39° PC excl. driver |
| 61° | ZUMI762172117 | Tubb Trimless Double FC Fish SLE G7 2x11,8/16,9W 350/500mA 2x1411/2015 lm 61° PC excl. driver |

**GOLD 2700K**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI762183117 | Tubb Trimless Double FC Gold SLE G7 2x11,8/16,9W 350/500mA 2x1308/1868 lm 2700K 14° PC excl. driver |
| 25° | ZUMI762181917 | Tubb Trimless Double FC Gold SLE G7 2x11,8/16,9W 350/500mA 2x1308/1868 lm 2700K 25° PC excl. driver |
| 39° | ZUMI762182017 | Tubb Trimless Double FC Gold SLE G7 2x11,8/16,9W 350/500mA 2x1308/1868 lm 2700K 39° PC excl. driver |
| 61° | ZUMI762182117 | Tubb Trimless Double FC Gold SLE G7 2x11,8/16,9W 350/500mA 2x1308/1868 lm 2700K 61° PC excl. driver |

**GOLD+ 2400K**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI762083117 | Tubb Trimless Double FC Gold+ SLE G7 2x11,8/16,9W 350/500mA 2x826/1171 lm 2400K 14° PC excl. driver |
| 25° | ZUMI762081917 | Tubb Trimless Double FC Gold+ SLE G7 2x11,8/16,9W 350/500mA 2x826/1171 lm 2400K 25° PC excl. driver |
| 39° | ZUMI762082017 | Tubb Trimless Double FC Gold+ SLE G7 2x11,8/16,9W 350/500mA 2x826/1171 lm 2400K 39° PC excl. driver |
| 61° | ZUMI762082117 | Tubb Trimless Double FC Gold+ SLE G7 2x11,8/16,9W 350/500mA 2x826/1171 lm 2400K 61° PC excl. driver |

**MEAT+**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI762193117 | Tubb Trimless Double FC Meat+ SLE G7 2x11,8/16,9W 350/500mA 2x879/1256 lm 14° PC excl. driver |
| 25° | ZUMI762191917 | Tubb Trimless Double FC Meat+ SLE G7 2x11,8/16,9W 350/500mA 2x879/1256 lm 25° PC excl. driver |
| 39° | ZUMI762192017 | Tubb Trimless Double FC Meat+ SLE G7 2x11,8/16,9W 350/500mA 2x879/1256 lm 39° PC excl. driver |
| 61° | ZUMI762192117 | Tubb Trimless Double FC Meat+ SLE G7 2x11,8/16,9W 350/500mA 2x879/1256 lm 61° PC excl. driver |

**FRESH MEAT**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI762203117 | Tubb Trimless Double FC Fresh Meat SLE G7 2x11,8/16,9W 350/500mA 2x857/1224 lm 14° PC excl. driver |
| 25° | ZUMI762201917 | Tubb Trimless Double FC Fresh Meat SLE G7 2x11,8/16,9W 350/500mA 2x857/1224 lm 25° PC excl. driver |
| 39° | ZUMI762202017 | Tubb Trimless Double FC Fresh Meat SLE G7 2x11,8/16,9W 350/500mA 2x857/1224 lm 39° PC excl. driver |
| 61° | ZUMI762202117 | Tubb Trimless Double FC Fresh Meat SLE G7 2x11,8/16,9W 350/500mA 2x857/1224 lm 61° PC excl. driver |

**FRUIT**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI762213117 | Tubb Trimless Double FC Fruit SLE G7 2x11,8/16,9W 350/500mA 2x1224/1748 lm 14° PC excl. driver |
| 25° | ZUMI762211917 | Tubb Trimless Double FC Fruit SLE G7 2x11,8/16,9W 350/500mA 2x1224/1748 lm 25° PC excl. driver |
| 39° | ZUMI762212017 | Tubb Trimless Double FC Fruit SLE G7 2x11,8/16,9W 350/500mA 2x1224/1748 lm 39° PC excl. driver |
| 61° | ZUMI762212117 | Tubb Trimless Double FC Fruit SLE G7 2x11,8/16,9W 350/500mA 2x1224/1748 lm 61° PC excl. driver |

> REQUIREMENTS**False ceiling recessed kit**

|         |                                      |
|---------|--------------------------------------|
| ZUMIFB2 | Tubb Trimless Double FC recessed kit |
|---------|--------------------------------------|

> DRIVER**dimmable**

|    |              |  |
|----|--------------|--|
| 2x | TRID28000671 | LCA 25W 350-1050mA one4all SR PRE (DALI, DSI, switchDIM) |
| 2x | TRID28001110 | PLUG 350mA   |
|    | or           |  |
| 2x | TRID28001114 | PLUG 500mA   |

**non dimmable**

|    |              |                                |
|----|--------------|--------------------------------|
| 2x | TRID28000700 | LC 25W 350-1050mA flexC SR EXC |
| 2x | TRID28001110 | PLUG 350mA                     |
|    | or           |                                |
| 2x | TRID28001114 | PLUG 500mA                     |

> OPTIONS**Honeycomb grid**

|          |                |
|----------|----------------|
| ZUMI25HC | Honeycomb grid |
|----------|----------------|


**PRODUCT DESCRIPTION**

Trimless double downlighter for general or accent lighting. Available in a version for stretch ceiling and false ceiling.  
Aluminium luminaire in several colors and color temperatures with several possible reflectors.



**TECHNICAL DATA**

Application Recessed  
 Dimensions visible dimensions: 154x307mm  
 Tubb: ø80mm h80mm  
 IP rating IP20  
 Power 350mA / 500mA  
 Lifetime L70/F10/65°C >55000h  
 MacAdam ellipse 3  
 Guarantee 5 year  
 (\*on components, only if ordered luminaire **+driver**)

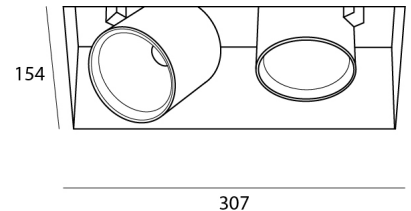

| Color Temperature | Wattage excl. driver | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|----------------------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 3100K             | 2x11,8W              | 350mA           | 2x1210 lm                  | 104 lm/W                        | 98  | F            |
|                   | 2x16,9W              | 500mA           | 2x1729 lm                  | 104 lm/W                        | 98  | F            |

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE** + (1) **W** (white) / **B** (black)  
 + (2) **G** (gold reflector)

*STRETCH CEILING*

- 14°** ZUMI752222317 Tubb Trimless Double SC Art CRI97 SLE G7 2x11,8/16,9W 350/500mA 2x1210/1729 lm 3100K 14° glass excl. driver
- 25°** ZUMI752222417 Tubb Trimless Double SC Art CRI97 SLE G7 2x11,8/16,9W 350/500mA 2x1210/1729 lm 3100K 25° glass excl. driver
- 39°** ZUMI752222517 Tubb Trimless Double SC Art CRI97 SLE G7 2x11,8/16,9W 350/500mA 2x1210/1729 lm 3100K 39° glass excl. driver
- 61°** ZUMI752222617 Tubb Trimless Double SC Art CRI97 SLE G7 2x11,8/16,9W 350/500mA 2x1210/1729 lm 3100K 61° glass excl. driver

*FALSE CEILING -recessed kit to be ordered separately !*

- 14°** ZUMI762222317 Tubb Trimless Double FC Art CRI97 SLE G7 2x11,8/16,9W 350/500mA 2x1210/1729 lm 3100K 14° glass excl. driver
- 25°** ZUMI762222417 Tubb Trimless Double FC Art CRI97 SLE G7 2x11,8/16,9W 350/500mA 2x1210/1729 lm 3100K 25° glass excl. driver
- 39°** ZUMI762222517 Tubb Trimless Double FC Art CRI97 SLE G7 2x11,8/16,9W 350/500mA 2x1210/1729 lm 3100K 39° glass excl. driver
- 61°** ZUMI762222617 Tubb Trimless Double FC Art CRI97 SLE G7 2x11,8/16,9W 350/500mA 2x1210/1729 lm 3100K 61° glass excl. driver

> REQUIREMENTS

**False ceiling recessed kit**

ZUMIFB2 Tubb Trimless Double FC recessed kit

> DRIVER

**dimmable**

- 2x** TRID28000671 LCA 25W 350-1050mA one4all SR PRE (DALI, DSI, switchDIM)
- 2x** TRID28001110 PLUG 350mA
- or
- 2x** TRID28001114 PLUG 500mA

**non dimmable**

- 2x** TRID28000700 LC 25W 350-1050mA flexC SR EXC
- 2x** TRID28001110 PLUG 350mA
- or
- 2x** TRID28001114 PLUG 500mA

> OPTIONS

**Honeycomb grid**

ZUMI25HC Honeycomb grid


**PRODUCT DESCRIPTION**

Trimless double downlighter for general or accent lighting. Available in a version for stretch ceiling and false ceiling.  
Aluminium luminaire in several colors and color temperatures with several possible reflectors.



**TECHNICAL DATA**

Application Recessed  
 Dimensions visible dimensions: 154x307mm  
 Tubb: ø80mm h80mm  
 IP rating IP20  
 Power 350mA / 500mA  
 Lifetime L70/F10/65°C >55000h  
 MacAdam ellipse 3  
 Guarantee 5 year  
 (\*on components, only if ordered luminaire **+driver**)

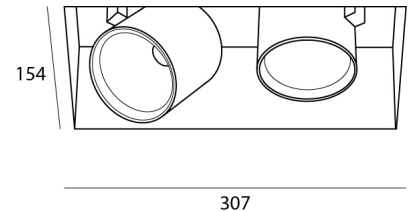

| Color Temperature | Wattage excl. driver | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|----------------------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 3250K             | 2x11,8W              | 350mA           | 2x1313 lm                  | 135 lm/W                        | 95  | F            |
|                   | 2x16,9W              | 500mA           | 2x1876 lm                  | 135 lm/W                        | 95  | F            |

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE + (1) W (white) / B (black)**

*STRETCH CEILING*

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI752232317 | Tubb Trimless Double SC Fashion SLE G7 2x11,8/16,9W 350/500mA 2x1313/1876 lm 3250K 14° glass excl. driver |
| 25° | ZUMI752232417 | Tubb Trimless Double SC Fashion SLE G7 2x11,8/16,9W 350/500mA 2x1313/1876 lm 3250K 25° glass excl. driver |
| 39° | ZUMI752232517 | Tubb Trimless Double SC Fashion SLE G7 2x11,8/16,9W 350/500mA 2x1313/1876 lm 3250K 39° glass excl. driver |
| 61° | ZUMI752232617 | Tubb Trimless Double SC Fashion SLE G7 2x11,8/16,9W 350/500mA 2x1313/1876 lm 3250K 61° glass excl. driver |

*FALSE CEILING -recessed kit to be ordered separately !*

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI762232317 | Tubb Trimless Double FC Fashion SLE G7 2x11,8/16,9W 350/500mA 2x1313/1876 lm 3250K 14° glass excl. driver |
| 25° | ZUMI762232417 | Tubb Trimless Double FC Fashion SLE G7 2x11,8/16,9W 350/500mA 2x1313/1876 lm 3250K 25° glass excl. driver |
| 39° | ZUMI762232517 | Tubb Trimless Double FC Fashion SLE G7 2x11,8/16,9W 350/500mA 2x1313/1876 lm 3250K 39° glass excl. driver |
| 61° | ZUMI762232617 | Tubb Trimless Double FC Fashion SLE G7 2x11,8/16,9W 350/500mA 2x1313/1876 lm 3250K 61° glass excl. driver |

> REQUIREMENTS

**False ceiling recessed kit**

ZUMIFB2 Tubb Trimless Double FC recessed kit

> DRIVER

**dimmable**

|    |              |  |
|----|--------------|--|
| 2x | TRID28000671 | LCA 25W 350-1050mA one4all SR PRE (DALI, DSI, switchDIM) |
| 2x | TRID28001110 | PLUG 350mA   |
|    | or           |  |
| 2x | TRID28001114 | PLUG 500mA   |

**non dimmable**

|    |              |                                |
|----|--------------|--------------------------------|
| 2x | TRID28000700 | LC 25W 350-1050mA flexC SR EXC |
| 2x | TRID28001110 | PLUG 350mA                     |
|    | or           |                                |
| 2x | TRID28001114 | PLUG 500mA                     |

> OPTIONS

**Honeycomb grid**

ZUMI25HC Honeycomb grid

**PRODUCT DESCRIPTION**


Trimless Single Downlighter for general or accent lighting. Available in a version for stretch ceiling and false ceiling.

Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

|                       |  |
|-----------------------|--|
| Application           | Recessed   |
| Dimensions            | visible dimensions: 154x154mm<br>Tubb: ø80mm h80mm |
| IP rating             | IP20   |
| Power                 | 350mA / 500mA                                      |
| Lifetime L70/F10/65°C | >55000h  |
| MacAdam ellipse       | 3  |
| Guarantee             | 5 year   |

(\*on components, only if ordered luminaire **+driver**)

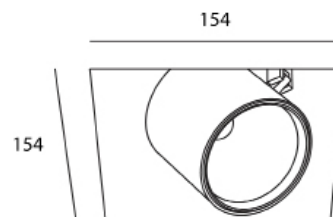

| Color Temperature | Wattage excl. driver | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|----------------------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K             | 11,8W                | 350mA           | 1558 lm                    | 134 lm/W                        | 90+ | E            |
|                   | 16,9W                | 500mA           | 2225 lm                    | 134 lm/W                        | 90+ | E            |
| 3000K             | 11,8W                | 350mA           | 1714 lm                    | 147 lm/W                        | 90+ | E            |
|                   | 16,9W                | 500mA           | 2449 lm                    | 147 lm/W                        | 90+ | E            |
| 3500K             | 11,8W                | 350mA           | 1732 lm                    | 149 lm/W                        | 90+ | E            |
|                   | 16,9W                | 500mA           | 2474 lm                    | 149 lm/W                        | 90+ | E            |
| 4000K             | 11,8W                | 350mA           | 1775 lm                    | 152 lm/W                        | 90+ | E            |
|                   | 16,9W                | 500mA           | 2536 lm                    | 152 lm/W                        | 90+ | E            |

**ORDER REFERENCE**

> [LUMINAIRE](#)

**! ORDER REFERENCE** + (1) **W** (white) / **B** (black)  
+ (2) **G** (gold reflector) option only for 2700K or 3000K

**STRETCH CEILING****2700K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI732132317 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver |
| 25° | ZUMI732132417 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver |
| 39° | ZUMI732132517 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver |
| 61° | ZUMI732132617 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver |

**3000K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI732142317 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver |
| 25° | ZUMI732142417 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver |
| 39° | ZUMI732142517 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver |
| 61° | ZUMI732142617 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver |

**3500K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI732152317 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 14° glass excl. driver |
| 25° | ZUMI732152417 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 25° glass excl. driver |
| 39° | ZUMI732152517 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 39° glass excl. driver |
| 61° | ZUMI732152617 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 61° glass excl. driver |

**4000K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI732162317 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 14° glass excl. driver |
| 25° | ZUMI732162417 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 25° glass excl. driver |
| 39° | ZUMI732162517 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 39° glass excl. driver |
| 61° | ZUMI732162617 | Tubb Trimless Single SC CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 61° glass excl. driver |

*FALSE CEILING -recessed kit to be ordered separately !*

**2700K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI742132317 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 14° glass excl. driver |
| 25° | ZUMI742132417 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 25° glass excl. driver |
| 39° | ZUMI742132517 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 39° glass excl. driver |
| 61° | ZUMI742132617 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1558/2225 lm 2700K 61° glass excl. driver |

**3000K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI742142317 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 14° glass excl. driver |
| 25° | ZUMI742142417 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 25° glass excl. driver |
| 39° | ZUMI742142517 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 39° glass excl. driver |
| 61° | ZUMI742142617 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1714/2449 lm 3000K 61° glass excl. driver |

**3500K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI742152317 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 14° glass excl. driver |
| 25° | ZUMI742152417 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 25° glass excl. driver |
| 39° | ZUMI742152517 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 39° glass excl. driver |
| 61° | ZUMI742152617 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1732/2474 lm 3500K 61° glass excl. driver |

**4000K**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI742162317 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 14° glass excl. driver |
| 25° | ZUMI742162417 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 25° glass excl. driver |
| 39° | ZUMI742162517 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 39° glass excl. driver |
| 61° | ZUMI742162617 | Tubb Trimless Single FC CRI90+ SLE G7 11,8/16,9W 350/500mA 1775/2536 lm 4000K 61° glass excl. driver |

> REQUIREMENTS**False ceiling recessed kit**

|         |                                      |
|---------|--------------------------------------|
| ZUMIFB1 | Tubb Trimless Single FC recessed kit |
|---------|--------------------------------------|

> DRIVER**dimmable**

|              |  |
|--------------|--|
| TRID28000671 | LCA 25W 350-1050mA one4all SR PRE (DALI, DSI, switchDIM) |
| TRID28001110 | PLUG 350mA   |
| or           |  |
| TRID28001114 | PLUG 500mA   |

**non dimmable**

|              |                                |
|--------------|--------------------------------|
| TRID28000700 | LC 25W 350-1050mA flexC SR EXC |
| TRID28001110 | PLUG 350mA                     |
| or           |                                |
| TRID28001114 | PLUG 500mA                     |

> OPTIONS**Honeycomb grid**

|          |                |
|----------|----------------|
| ZUMI25HC | Honeycomb grid |
|----------|----------------|



**PRODUCT DESCRIPTION**

Trimless Single Downlighter for general or accent lighting equipped with a LEDmodule especially to enlighten several food products. There's a choice between 'fish' to light up fish products, 'gold' for bakery goods and 'gold+' for rather crusty bakery goods such as croissants and baguettes. The cannon 'meat+' provides a highly red color which is ideal for the presentation of meat.

Its 'fresh meat' is suitable to use for meat in the counter. Fruit is ideal for fruit and vegetables.


Available in a version for stretch ceiling and false ceiling.

Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

|                       |  |
|-----------------------|--|
| Application           | Recessed   |
| Dimensions            | visible dimensions: 154x154mm<br>Tubb: ø80mm h80mm |
| IP rating             | IP20   |
| Power                 | 350mA / 500mA                                      |
| Lifetime L70/F10/65°C | >55000h  |
| MacAdam ellipse       | 3  |
| Guarantee             | 5 year   |

(\*on components, only if ordered luminaire **+driver**)

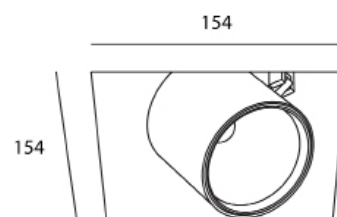

| Color Temperature | Wattage excl. driver | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|----------------------|-----------------|----------------------------|---------------------------------|-----|--------------|
| FISH              | 11,8W                | 350mA           | 1411 lm                    | 121 lm/W                        | /   | E            |
|                   | 16,9W                | 500mA           | 2015 lm                    | 121 lm/W                        | /   | E            |
| GOLD 2700K        | 11,8W                | 350mA           | 1308 lm                    | 112 lm/W                        | /   | E            |
|                   | 16,9W                | 500mA           | 1868 lm                    | 112 lm/W                        | /   | E            |
| GOLD+ 2400K       | 11,8W                | 350mA           | 826 lm                     | 73 lm/W                         | /   | F            |
|                   | 16,9W                | 500mA           | 1171 lm                    | 70 lm/W                         | /   | F            |
| MEAT+             | 11,8W                | 350mA           | 879 lm                     | 75 lm/W                         | /   | n.a          |
|                   | 16,9W                | 500mA           | 1256 lm                    | 75 lm/W                         | /   | n.a          |
| FRESH MEAT        | 11,8W                | 350mA           | 857 lm                     | 74 lm/W                         | /   | n.a          |
|                   | 16,9W                | 500mA           | 1224 lm                    | 74 lm/W                         | /   | n.a          |
| FRUIT             | 11,8W                | 350mA           | 1224 lm                    | 105 lm/W                        | /   | F            |
|                   | 16,9W                | 500mA           | 1748 lm                    | 105 lm/W                        | /   | F            |

**ORDER REFERENCE**

> LUMINAIRE

**! ORDER REFERENCE** + (1) **W** (white) / **B** (black)

+ (2) **G** (gold reflector) option only for Gold 2700K

**STRETCH CEILING**

| <b>FISH</b>        |               |   |
|--------------------|---------------|---|
| 14°                | ZUMI732173117 | Tubb Trimless Single SC Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 14° PC excl. driver       |
| 25°                | ZUMI732171917 | Tubb Trimless Single SC Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 25° PC excl. driver       |
| 39°                | ZUMI732172017 | Tubb Trimless Single SC Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 39° PC excl. driver       |
| 61°                | ZUMI732172117 | Tubb Trimless Single SC Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 61° PC excl. driver       |
| <b>GOLD 2700K</b>  |               |   |
| 14°                | ZUMI732183117 | Tubb Trimless Single SC Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 14° PC excl. driver |
| 25°                | ZUMI732181917 | Tubb Trimless Single SC Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 25° PC excl. driver |
| 39°                | ZUMI732182017 | Tubb Trimless Single SC Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 39° PC excl. driver |
| 61°                | ZUMI732182117 | Tubb Trimless Single SC Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 61° PC excl. driver |
| <b>GOLD+ 2400K</b> |               |   |
| 14°                | ZUMI732083117 | Tubb Trimless Single SC Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 14° PC excl. driver |
| 25°                | ZUMI732081917 | Tubb Trimless Single SC Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 25° PC excl. driver |
| 39°                | ZUMI732082017 | Tubb Trimless Single SC Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 39° PC excl. driver |
| 61°                | ZUMI732082117 | Tubb Trimless Single SC Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 61° PC excl. driver |
| <b>MEAT+</b>       |               |   |
| 14°                | ZUMI732193117 | Tubb Trimless Single SC Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 14° PC excl. driver       |
| 25°                | ZUMI732191917 | Tubb Trimless Single SC Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 25° PC excl. driver       |
| 39°                | ZUMI732192017 | Tubb Trimless Single SC Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 39° PC excl. driver       |
| 61°                | ZUMI732192117 | Tubb Trimless Single SC Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 61° PC excl. driver       |

**FRESH MEAT**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI732203117 | Tubb Trimless Single SC Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 14° PC excl. driver |
| 25° | ZUMI732201917 | Tubb Trimless Single SC Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 25° PC excl. driver |
| 39° | ZUMI732202017 | Tubb Trimless Single SC Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 39° PC excl. driver |
| 61° | ZUMI732202117 | Tubb Trimless Single SC Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 61° PC excl. driver |

**FRUIT**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI732213117 | Tubb Trimless Single SC Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 14° PC excl. driver |
| 25° | ZUMI732211917 | Tubb Trimless Single SC Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 25° PC excl. driver |
| 39° | ZUMI732212017 | Tubb Trimless Single SC Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 39° PC excl. driver |
| 61° | ZUMI732212117 | Tubb Trimless Single SC Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 61° PC excl. driver |

*FALSE CEILING -recessed kit to be ordered separately !*

**FISH**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI742173117 | Tubb Trimless Single FC Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 14° PC excl. driver |
| 25° | ZUMI742171917 | Tubb Trimless Single FC Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 25° PC excl. driver |
| 39° | ZUMI742172017 | Tubb Trimless Single FC Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 39° PC excl. driver |
| 61° | ZUMI742172117 | Tubb Trimless Single FC Fish SLE G7 11,8/16,9W 350/500mA 1411/2015 lm 61° PC excl. driver |

**GOLD 2700K**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI742183117 | Tubb Trimless Single FC Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 14° PC excl. driver |
| 25° | ZUMI742181917 | Tubb Trimless Single FC Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 25° PC excl. driver |
| 39° | ZUMI742182017 | Tubb Trimless Single FC Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 39° PC excl. driver |
| 61° | ZUMI742182117 | Tubb Trimless Single FC Gold SLE G7 11,8/16,9W 350/500mA 1308/1868 lm 2700K 61° PC excl. driver |

**GOLD+ 2400K**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI742083117 | Tubb Trimless Single FC Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 14° PC excl. driver |
| 25° | ZUMI742081917 | Tubb Trimless Single FC Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 25° PC excl. driver |
| 39° | ZUMI742082017 | Tubb Trimless Single FC Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 39° PC excl. driver |
| 61° | ZUMI742082117 | Tubb Trimless Single FC Gold+ SLE G7 11,8/16,9W 350/500mA 826/1171 lm 2400K 61° PC excl. driver |

**MEAT+**

|     |               |   |
|-----|---------------|---|
| 14° | ZUMI742193117 | Tubb Trimless Single FC Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 14° PC excl. driver |
| 25° | ZUMI742191917 | Tubb Trimless Single FC Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 25° PC excl. driver |
| 39° | ZUMI742192017 | Tubb Trimless Single FC Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 39° PC excl. driver |
| 61° | ZUMI742192117 | Tubb Trimless Single FC Meat+ SLE G7 11,8/16,9W 350/500mA 879/1256 lm 61° PC excl. driver |

**FRESH MEAT**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI742203117 | Tubb Trimless Single FC Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 14° PC excl. driver |
| 25° | ZUMI742201917 | Tubb Trimless Single FC Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 25° PC excl. driver |
| 39° | ZUMI742202017 | Tubb Trimless Single FC Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 39° PC excl. driver |
| 61° | ZUMI742202117 | Tubb Trimless Single FC Fresh Meat SLE G7 11,8/16,9W 350/500mA 857/1224 lm 61° PC excl. driver |

**FRUIT**

|     |               |  |
|-----|---------------|--|
| 14° | ZUMI742213117 | Tubb Trimless Single FC Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 14° PC excl. driver |
| 25° | ZUMI742211917 | Tubb Trimless Single FC Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 25° PC excl. driver |
| 39° | ZUMI742212017 | Tubb Trimless Single FC Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 39° PC excl. driver |
| 61° | ZUMI742212117 | Tubb Trimless Single FC Fruit SLE G7 11,8/16,9W 350/500mA 1224/1748 lm 61° PC excl. driver |

> REQUIREMENTS

ZUMIFB1

**False ceiling recessed kit**

Tubb Trimless Single FC recessed kit

> DRIVER**dimmable**

|              |  |
|--------------|--|
| TRID28000671 | LCA 25W 350-1050mA one4all SR PRE (DALI, DSI, switchDIM) |
| TRID28001110 | PLUG 350mA   |
| or           |  |
| TRID28001114 | PLUG 500mA   |

**non dimmable**

|              |                                |
|--------------|--------------------------------|
| TRID28000700 | LC 25W 350-1050mA flexC SR EXC |
| TRID28001110 | PLUG 350mA                     |
| or           |                                |
| TRID28001114 | PLUG 500mA                     |

> OPTIONS**Honeycomb grid**

|          |                |
|----------|----------------|
| ZUMI25HC | Honeycomb grid |
|----------|----------------|


**PRODUCT DESCRIPTION**

Trimless Single Downlighter for general or accent lighting. Available in a version for stretch ceiling and false ceiling.  
Aluminium luminaire in several colors and color temperatures with several possible reflectors.



**TECHNICAL DATA**

Application Recessed  
 Dimensions visible dimensions: 154x154mm  
 Tubb: ø80mm h80mm  
 IP rating IP20  
 Power 350mA / 500mA  
 Lifetime L70/F10/65°C >55000h  
 MacAdam ellipse 3  
 Guarantee 5 year  
 (\*on components, only if ordered luminaire **+driver**)

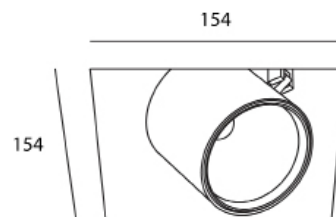

| Color Temperature | Wattage excl. driver | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|----------------------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 3100K             | 11,8W                | 350mA           | 1210 lm                    | 104 lm/W                        | 98  | F            |
|                   | 16,9W                | 500mA           | 1729 lm                    | 104 lm/W                        | 98  | F            |

**ORDER REFERENCE**

> [LUMINAIRE](#)

**! ORDER REFERENCE** + (1) **W** (white) / **B** (black)  
 + (2) **G** (gold reflector)

*STRETCH CEILING*

- 14° ZUMI732222317 Tubb Trimless Single SC Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3100K 14° glass excl. driver
- 25° ZUMI732222417 Tubb Trimless Single SC Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3100K 25° glass excl. driver
- 39° ZUMI732222517 Tubb Trimless Single SC Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3100K 39° glass excl. driver
- 61° ZUMI732222617 Tubb Trimless Single SC Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3100K 61° glass excl. driver

*FALSE CEILING -recessed kit to be ordered separately !*

- 14° ZUMI742222317 Tubb Trimless Single FC Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3100K 14° glass excl. driver
- 25° ZUMI742222417 Tubb Trimless Single FC Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3100K 25° glass excl. driver
- 39° ZUMI742222517 Tubb Trimless Single FC Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3100K 39° glass excl. driver
- 61° ZUMI742222617 Tubb Trimless Single FC Art CRI97 SLE G7 11,8/16,9W 350/500mA 1210/1729 lm 3100K 61° glass excl. driver

> [REQUIREMENTS](#)

ZUMIFB1

**False ceiling recessed kit**

Tubb Trimless Single FC recessed kit

> [DRIVER](#)

**dimmable**

- TRID28000671 LCA 25W 350-1050mA one4all SR PRE (DALI, DSI, switchDIM)
- TRID28001110 PLUG 350mA
- or
- TRID28001114 PLUG 500mA

**non dimmable**

- TRID28000700 LC 25W 350-1050mA flexC SR EXC
- TRID28001110 PLUG 350mA
- or
- TRID28001114 PLUG 500mA

> [OPTIONS](#)

**Honeycomb grid**


ZUMI25HC Honeycomb grid

**PRODUCT DESCRIPTION**

Trimless Single Downlighter for general or accent lighting. Available in a version for stretch ceiling and false ceiling.  
Aluminium luminaire in several colors and color temperatures with several possible reflectors.

**TECHNICAL DATA**

|   |  |
|---|--|
| Application   | Recessed   |
| Dimensions  | visible dimensions: 154x154mm<br>Tubb: ø80mm h80mm |
| IP rating   | IP20   |
| Power   | 350mA / 500mA                                      |
| Lifetime L70/F10/65°C                                       | >55000h  |
| MacAdam ellipse   | 3  |
| Guarantee   | 5 year   |
| (*on components, only if ordered luminaire <b>+driver</b> ) |  |

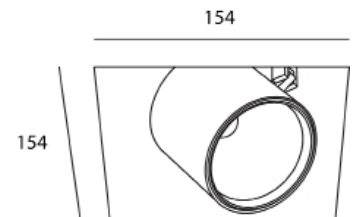

| Color Temperature | Wattage excl. driver | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|----------------------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 3250K             | 11,8W                | 350mA           | 1313 lm                    | 136 lm/W                        | 95  | F            |

**ORDER REFERENCE**

> [LUMINAIRE](#)

**! ORDER REFERENCE + (1) W (white) / B (black)**

**STRETCH CEILING**

|            |               |   |
|------------|---------------|---|
| <b>14°</b> | ZUMI732232317 | Tubb Trimless Single SC Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 14° glass excl. driver |
| <b>25°</b> | ZUMI732232417 | Tubb Trimless Single SC Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 25° glass excl. driver |
| <b>39°</b> | ZUMI732232517 | Tubb Trimless Single SC Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 39° glass excl. driver |
| <b>61°</b> | ZUMI732232617 | Tubb Trimless Single SC Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 61° glass excl. driver |

**FALSE CEILING -recessed kit to be ordered separately !**

|            |               |   |
|------------|---------------|---|
| <b>14°</b> | ZUMI742232317 | Tubb Trimless Single FC Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 14° glass excl. driver |
| <b>25°</b> | ZUMI742232417 | Tubb Trimless Single FC Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 25° glass excl. driver |
| <b>39°</b> | ZUMI742232517 | Tubb Trimless Single FC Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 39° glass excl. driver |
| <b>61°</b> | ZUMI742232617 | Tubb Trimless Single FC Fashion CRI95 SLE G7 11,8/16,9W 350/500mA 1313/1876 lm 3250K 61° glass excl. driver |

> [REQUIREMENTS](#)

**False ceiling recessed kit**

ZUMIFB1 Tubb Trimless Single FC recessed kit

> [DRIVER](#)

**dimmable**

TRID28000671 LCA 25W 350-1050mA one4all SR PRE (DALI, DSI, switchDIM)  
TRID28001110 PLUG 350mA  
or  
TRID28001114 PLUG 500mA

**non dimmable**

TRID28000700 LC 25W 350-1050mA flexC SR EXC  
TRID28001110 PLUG 350mA  
or  
TRID28001114 PLUG 500mA

> [OPTIONS](#)

**Honeycomb grid**

ZUMI25HC Honeycomb grid