


PRODUCT DESCRIPTION

Ceiling or wall luminaire for general lighting. With its unique design a real eyecatcher.

Aluminium luminaire, white or black powder coated, with opal polycarbonate protection. Available in several colour temperatures, dimmable and non dimmable.

**TECHNICAL DATA**

Application	surface
Dimensions	578 x 575 x 85mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

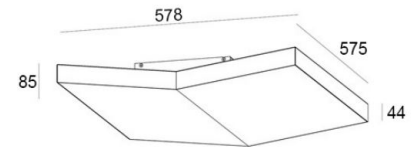

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3000K	47,7W	350mA	6472 lm	158 lm/W	90+	D
4000K	47,7W	350mA	6760 lm	164 lm/W	90+	C

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + (1) **W** (white) / **B** (black)
+ (2) **D** (if dimmable)

3000K	ZUMI032550106	Wingman Surface QLE G3 47,7W 350mA 6472 lm 3000K CRI90+ incl. driver
4000K	ZUMI032560106	Wingman Surface QLE G3 47,7W 350mA 6760 lm 4000K CRI90+ incl. driver
5000K	<i>on request</i>	

> [DRIVER](#)

Included, if dimmable: DALI, pushDIM

> [OPTIONS](#)

Prismatic PMMA

ZUMI03PP

Prismatic PMMA

Emergency kit

On request

PRODUCT DESCRIPTION


Suspended luminaire for general lighting. With its unique design a real eyecatcher.

Aluminium luminaire, white or black powder coated, with opal polycarbonate protection. Available in several colour temperatures, dimmable and non dimmable.



TECHNICAL DATA

Application	suspension
Dimensions	578 x 575 x 85mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

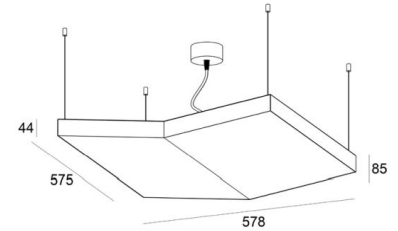

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3000K	47,7W	350mA	6472 lm	158 lm/W	90+	D
4000K	47,7W	350mA	6760 lm	164 lm/W	90+	C

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W** (white) / **B** (black)
+ (2) **D** (if dimmable)

3000K	ZUMI952550106	Wingman Suspension QLE G3 47,7W 350mA 6472 lm 3000K CRI90+ incl. driver
4000K	ZUMI952560106	Wingman Suspension QLE G3 47,7W 350mA 6760 lm 4000K CRI90+ incl. driver
5000K	<i>on request</i>	

> DRIVER

Included, if dimmable: DALI, pushDIM

> OPTIONS

Prismatic PMMA

ZUMI03PP

Prismatic PMMA

Emergency kit

On request