


PRODUCT DESCRIPTION

FLUUT on track for general or accent lighting.
Aluminium luminaire, available in different colors and different color temperatures .



TECHNICAL DATA

Application	3F Track
IP rating	IP20
Power	230V
Lifetime L70/B50/65°C	>50000h
MacAdam ellipse	3
Guarantee	5 year



Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	9,5W	230V	710 lm	75 lm/W	90+	G
3000K	9,5W	230V	760 lm	80 lm/W	90+	G
4000K	9,5W	230V	810 lm	85 lm/W	90+	F

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)

2700K

12°	ZUMI1022602701	Fluut 3F SLA AC G2 750lm 230V 9,5W 2700K CRI90+ 12°
24°	ZUMI1021742801	Fluut 3F SLA AC G2 710lm 230V 9,5W 2700K CRI90+ 24°
36°	ZUMI1021752901	Fluut 3F SLA AC G2 710lm 230V 9,5W 2700K CRI90+ 36°

3000K

12°	ZUMI1022612701	Fluut 3F SLA AC G2 780lm 230V 9,5W 3000K CRI90+ 12°
24°	ZUMI1021762801	Fluut 3F SLA AC G2 760lm 230V 9,5W 3000K CRI90+ 24°
36°	ZUMI1021772901	Fluut 3F SLA AC G2 760lm 230V 9,5W 3000K CRI90+ 36°

4000K

12°	ZUMI1022622701	Fluut 3F SLA AC G2 820lm 230V 9,5W 4000K CRI90+ 12°
24°	ZUMI1021782801	Fluut 3F SLA AC G2 810lm 230V 9,5W 4000K CRI90+ 24°
36°	ZUMI1021792901	Fluut 3F SLA AC G2 810lm 230V 9,5W 4000K CRI90+ 36°

> [no driver needed](#)


dimnable phase cut - see dimmerlist

PRODUCT DESCRIPTION

FLUUT on track for general or accent lighting.
Aluminium luminaire, available in different colors and different color temperatures .

TECHNICAL DATA

Application	3F Track (Only Global or Stucchi track)
IP rating	IP20
Power	230V
Lifetime L70/B50/65°C	>50000h
MacAdam ellipse	3
Guarantee	5 year

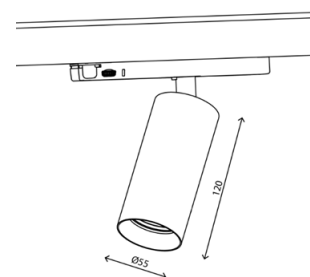

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	14W	350mA	1140 lm	93 lm/W	90+	G
3000K	14W	350mA	1170 lm	96 lm/W	90+	F
4000K	14W	350mA	1270 lm	104 lm/W	90+	F

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)

2700K

12°	ZUMI1012632706	Fluut 3F Dim SLA DC 14W 970 lm 2700K CRI90+ 12° incl. driver(Global Track)
24°	ZUMI1011622806	Fluut 3F Dim SLA DC 14W 1140 lm 2700K CRI90+ 24° incl. driver(Global Track)
36°	ZUMI1011632906	Fluut 3F Dim SLA DC 14W 1140 lm 2700K CRI90+ 36° incl. driver(Global Track)

3000K

12°	ZUMI1012642706	Fluut 3F Dim SLA DC 14W 1040 lm 3000K CRI90+ 12° incl. driver(Global Track)
24°	ZUMI1011642806	Fluut 3F Dim SLA DC 14W 1170 lm 3000K CRI90+ 24° incl. driver(Global Track)
36°	ZUMI1011652906	Fluut 3F Dim SLA DC 14W 1170 lm 3000K CRI90+ 36° incl. driver(Global Track)

4000K

12°	ZUMI1012652706	Fluut 3F Dim SLA DC 14W 1130 lm 4000K CRI90+ 12° incl. driver(Global Track)
24°	ZUMI1011662806	Fluut 3F Dim SLA DC 14W 1270 lm 4000K CRI90+ 24° incl. driver(Global Track)
36°	ZUMI1011672906	Fluut 3F Dim SLA DC 14W 1270 lm 4000K CRI90+ 36° incl. driver(Global Track)

> [Driver](#)

Included : DALI

PRODUCT DESCRIPTION

FLUUT on track for general or accent lighting, wireless dimmable via Casambi.


Aluminium luminaire, available in different colors and different color temperatures .



TECHNICAL DATA

Application	3F Track (Eutrac, Global or Stucchi track)
IP rating	IP20
Power	230V
Lifetime L70/B50/65°C	>50000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	14W	350mA	1140 lm	93 lm/W	90+	G
3000K	14W	350mA	1170 lm	96 lm/W	90+	F
4000K	14W	350mA	1270 lm	104 lm/W	90+	F



ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)

2700K

12°	ZUMI1402632706	Fluut 3F Wireless Casambi SLA DC 14W 970 lm 2700K CRI90+ 12° incl. driver
24°	ZUMI1401622806	Fluut 3F Wireless Casambi SLA DC 14W 1140 lm 2700K CRI90+ 24° incl. driver
36°	ZUMI1401632906	Fluut 3F Wireless Casambi SLA DC 14W 1140 lm 2700K CRI90+ 36° incl. driver

3000K

12°	ZUMI1402642706	Fluut 3F Wireless Casambi SLA DC 14W 1040 lm 3000K CRI90+ 12° incl. driver
24°	ZUMI1401642806	Fluut 3F Wireless Casambi SLA DC 14W 1170 lm 3000K CRI90+ 24° incl. driver
36°	ZUMI1401652906	Fluut 3F Wireless Casambi SLA DC 14W 1170 lm 3000K CRI90+ 36° incl. driver

4000K

12°	ZUMI1402652706	Fluut 3F Wireless Casambi SLA DC 14W 1130 lm 4000K CRI90+ 12° incl. driver
24°	ZUMI1401662806	Fluut 3F Wireless Casambi SLA DC 14W 1270 lm 4000K CRI90+ 24° incl. driver
36°	ZUMI1401672906	Fluut 3F Wireless Casambi SLA DC 14W 1270 lm 4000K CRI90+ 36° incl. driver

> [Driver](#)

Included

> [Recommended Wireless User Interface](#)

TRID28002213	basicDIM Wireless User Interface black
TRID28002420	basicDIM Wireless User Interface white

PRODUCT DESCRIPTION


FLUUT on track for general or accent lighting.
Aluminium luminaire, available in different colors and different color temperatures .

TECHNICAL DATA

Application	3F Track (Eutrac, Global or Stucchi)
IP rating	IP20
Power	230V
Lifetime L70/B50/65°C	>50000h
MacAdam ellipse	3
Guarantee	5 year



Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	14W	350mA	1140 lm	93 lm/W	90+	G
3000K	14W	350mA	1170 lm	96 lm/W	90+	F
4000K	14W	350mA	1270 lm	104 lm/W	90+	F

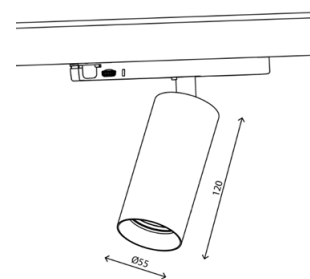**ORDER REFERENCE**

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)

2700K

12°	ZUMI1032632706	Fluut 3F Non dim. SLA DC 14W 970 lm 2700K CRI90+ 12° incl. driver
24°	ZUMI1031622806	Fluut 3F Non dim. SLA DC 14W 1140 lm 2700K CRI90+ 24° incl. driver
36°	ZUMI1031632906	Fluut 3F Non dim. SLA DC 14W 1140 lm 2700K CRI90+ 36° incl. driver

3000K

12°	ZUMI1032642706	Fluut 3F Non dim. SLA DC 14W 1040 lm 3000K CRI90+ 12° incl. driver
24°	ZUMI1031642806	Fluut 3F Non dim. SLA DC 14W 1170 lm 3000K CRI90+ 24° incl. driver
36°	ZUMI1031652906	Fluut 3F Non dim. SLA DC 14W 1170 lm 3000K CRI90+ 36° incl. driver

4000K

12°	ZUMI1032652706	Fluut 3F Non dim. SLA DC 14W 1130 lm 4000K CRI90+ 12° incl. driver
24°	ZUMI1031662806	Fluut 3F Non dim. SLA DC 14W 1270 lm 4000K CRI90+ 24° incl. driver
36°	ZUMI1031672906	Fluut 3F Non dim. SLA DC 14W 1270 lm 4000K CRI90+ 36° incl. driver

> [Driver](#)

Included - non dim.


PRODUCT DESCRIPTION

FLUUT on track 48V for general or accent lighting.
Aluminium luminaire, available in different colors and different color temperatures .

TECHNICAL DATA

Application	48V Track (Stucchi)
IP rating	IP20
Power	48V
Lifetime L70/B50/65°C	>50000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	12,2W	48V DC	1140 lm	80 lm/W	90+	G
3000K	12,2W	48V DC	1170 lm	85 lm/W	90+	F
4000K	12,2W	48V DC	1270 lm	93 lm/W	90+	F

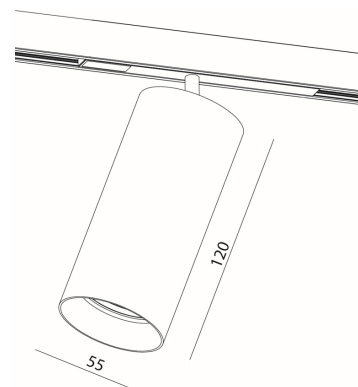**ORDER REFERENCE**

> [LUMINAIRE](#)

! ORDER REFERENCE + (1) W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)
+ (2) **DD (Dali dim)**

2700K

12°	ZUMI1162632704	Fluut 48V DC SLA DC 12,2W 970 lm 2700K CRI90+ 12° excl.driver
24°	ZUMI1161622804	Fluut 48V DC SLA DC 12,2W 1140 lm 2700K CRI90+ 24° excl.driver
36°	ZUMI1161632904	Fluut 48V DC SLA DC 12,2W 1140 lm 2700K CRI90+ 36° excl.driver

3000K

12°	ZUMI1162642704	Fluut 48V DC SLA DC 12,2W 1040 lm 3000K CRI90+ 12° excl.driver
24°	ZUMI1161642804	Fluut 48V DC SLA DC 12,2W 1170 lm 3000K CRI90+ 24° excl.driver
36°	ZUMI1161652904	Fluut 48V DC SLA DC 12,2W 1170 lm 3000K CRI90+ 36° excl.driver

4000K

12°	ZUMI1162652704	Fluut 48V DC SLA DC 12,2W 1130 lm 4000K CRI90+ 12° excl.driver
24°	ZUMI1161662804	Fluut 48V DC SLA DC 12,2W 1270 lm 4000K CRI90+ 24° excl.driver
36°	ZUMI1161672904	Fluut 48V DC SLA DC 12,2W 1270 lm 4000K CRI90+ 36° excl.driver

> Driver :

non dimmable :

Compact	TRID28001232	LCU 48V 75W DC-STR FO SR
	TRID28001045	LCU 48V 150W DC-STR FO SR
Linear	TRID28000816	LCU 48V 75W DC-STR FO Ip
	TRID28001234	LCU 48V 150W DC-STR FO Ip

dimmable :

Compact	TRID28001233	LCU 48V 75W DC-STR DIM SR
	TRID28001044	LCU 48V 150W DC-STR DIM SR
Linear	TRID28000815	LCU 48V 75W DC-STR DIM Ip
	TRID28001235	LCU 48V 150W DC-STR DIM Ip