

PRODUCT DESCRIPTION

The PLK is a very small and elegant spot with multiple possibilities. The tube, with a diameter of about 40mm and a length of 138mm, is 359° rotatable and 80° inclinable.


Aluminium luminaire.



TECHNICAL DATA

Application	Track (Stucchi)
IP rating	IP20
Power	48V
Lifetime L70/B50/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire + driver)

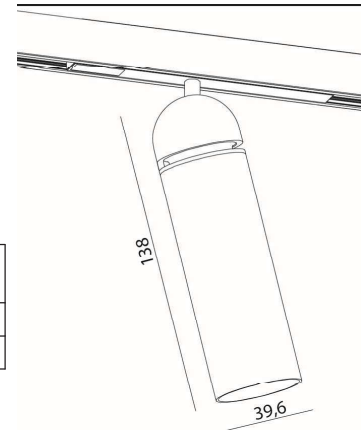

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	7,15W	48V DC	864lm	121 lm/W	90+	E
3000K	7,15W	48V DC	930lm	130 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

**! ORDER REFERENCE + (1) W (white) / B (black) // G (gold) / T (titanium) / BR (bronze)
(2) DD (Dali dim)**

2700K 10°	ZUMI1172243004	PLK 48V DC 10° SLE G7 7,15W 864lm 2700K CRI90+
2700K 40°	ZUMI1172241204	PLK 48V DC 40° SLE G7 7,15W 864lm 2700K CRI90+
3000K 10°	ZUMI1172253004	PLK 48V DC 10° SLE G7 7,15W 930lm 3000K CRI90+
3000K 40°	ZUMI1172251204	PLK 48V DC 40° SLE G7 7,15W 930lm 3000K CRI90+

> DRIVER (to be placed remoted)

non dimmable :

Compact	TRID28001232 TRID28001045	LCU 48V 75W DC-STR FO SR LCU 48V 150W DC-STR FO SR
Linear	TRID28000816 TRID28001234	LCU 48V 75W DC-STR FO Ip LCU 48V 150W DC-STR FO Ip

dimmable :

Compact	TRID28001233 TRID28001044	LCU 48V 75W DC-STR DIM SR LCU 48V 150W DC-STR DIM SR
Linear	TRID28000815 TRID28001235	LCU 48V 75W DC-STR DIM Ip LCU 48V 150W DC-STR DIM Ip