


PRODUCT DESCRIPTION

The FLUUT is a very small and elegant spot with multiple possibilities. The tubes, with a diameter of about 55mm and a length of 120mm, are 359° rotatable and 80° inclinable and placed on a dimmable base. There are several standard possibilities, specials are on request.

Aluminium luminaire.

**TECHNICAL DATA**

| | |
|-----------------------|-----------------------|
| Application | surface |
| Dimensions | base: 400 x 41 x 41mm |
| IP rating | IP20 |
| Power | 230V |
| Lifetime L70/B50/65°C | >50000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |



| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | 2x 9,5W | 230V | 2x 710 lm | 75 lm/W | 90+ | G |
| 3000K | 2x 9,5W | 230V | 2x 760 lm | 80 lm/W | 90+ | G |
| 4000K | 2x 9,5W | 230V | 2x 810 lm | 85 lm/W | 90+ | F |

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)

2700K

| | | |
|------------|-----------------|---|
| 12° | ZUMI1102602701 | Fluut Base 400/2 SLA AC G2 2x750lm 230V 2x9,5W 2700K CRI90+ 12° |
| 24° | ZUMI1101742801 | Fluut Base 400/2 SLA AC G2 2x710lm 230V 2x9,5W 2700K CRI90+ 24° |
| 36° | ZUMI 1101752901 | Fluut Base 400/2 SLA AC G2 2x710lm 230V 2x9,5W 2700K CRI90+ 36° |

3000K

| | | |
|------------|----------------|---|
| 12° | ZUMI1102612701 | Fluut Base 400/2 SLA AC G2 2x780lm 230V 2x9,5W 3000K CRI90+ 12° |
| 24° | ZUMI1101762801 | Fluut Base 400/2 SLA AC G2 2x760lm 230V 2x9,5W 3000K CRI90+ 24° |
| 36° | ZUMI1101772901 | Fluut Base 400/2 SLA AC G2 2x760lm 230V 2x9,5W 3000K CRI90+ 36° |

4000K

| | | |
|------------|----------------|---|
| 12° | ZUMI1102622701 | Fluut Base 400/2 SLA AC G2 2x820lm 230V 2x9,5W 4000K CRI90+ 12° |
| 24° | ZUMI1101782801 | Fluut Base 400/2 SLA AC G2 2x810lm 230V 2x9,5W 4000K CRI90+ 24° |
| 36° | ZUMI1101792901 | Fluut Base 400/2 SLA AC G2 2x810lm 230V 2x9,5W 4000K CRI90+ 36° |

> [no driver needed](#)

dimmmable phase cut - see dimmerlist

PRODUCT DESCRIPTION


The FLUUT is a very small and elegant spot with multiple possibilities. The tubes, with a diameter of about 55mm and a length of 120mm, are 359° rotatable and 80° inclinable and placed on a base with the driver included which makes it easy to install.

There are several standard possibilities, specials are on request.

Aluminium luminaire.

**TECHNICAL DATA**

| | |
|-----------------------|-----------------------|
| Application | surface |
| Dimensions | base: 400 x 60 x 40mm |
| IP rating | IP20 |
| Power | 230V |
| Lifetime L70/B50/65°C | >50000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |



| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | 2x 10W | 250mA | 2x 770 lm | 88 lm/W | 90+ | G |
| | 2x 14W | 350mA | 2x 1140 lm | 93 lm/W | 90+ | G |
| 3000K | 2x 10W | 250mA | 2x 840 lm | 95 lm/W | 90+ | F |
| | 2x 14W | 350mA | 2x 1170 lm | 96 lm/W | 90+ | F |
| 4000K | 2x 10W | 250mA | 2x 890 lm | 101 lm/W | 90+ | F |
| | 2x 14W | 350mA | 2x 1270 lm | 104 lm/W | 90+ | F |

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) BASE only W/B/C / BR (bronze) BASE only W/B/C + (2) D (for dimmable)

2700K

700lm

24° ZUMI1071682814 Fluut Base 400/2 SLA DC 2x10W 2x770 lm 2700K CRI90+ 24° incl. driver

36° ZUMI1071692914 Fluut Base 400/2 SLA DC 2x10W 2x770 lm 2700K CRI90+ 36° incl. driver

1200lm

12° ZUMI1072632706 Fluut Base 400/2 SLA DC 2x14W 2x1140 lm 2700K CRI90+ 12° incl. driver

24° ZUMI1071622806 Fluut Base 400/2 SLA DC 2x14W 2x1140 lm 2700K CRI90+ 24° incl. driver

36° ZUMI1071632906 Fluut Base 400/2 SLA DC 2x14W 2x1140 lm 2700K CRI90+ 36° incl. driver

3000K

700lm

24° ZUMI1071702814 Fluut Base 400/2 SLA DC 2x10W 2x840 lm 3000K CRI90+ 24° incl. driver

36° ZUMI1071712914 Fluut Base 400/2 SLA DC 2x10W 2x840 lm 3000K CRI90+ 36° incl. driver

1200lm

12° ZUMI1072642706 Fluut Base 400/2 SLA DC 2x14W 2x1170 lm 3000K CRI90+ 12° incl. driver

24° ZUMI1071642806 Fluut Base 400/2 SLA DC 2x14W 2x1170 lm 3000K CRI90+ 24° incl. driver

36° ZUMI1071652906 Fluut Base 400/2 SLA DC 2x14W 2x1170 lm 3000K CRI90+ 36° incl. driver

4000K

700lm

24° ZUMI1071722814 Fluut Base 400/2 SLA DC 2x10W 2x890 lm 4000K CRI90+ 24° incl. driver

36° ZUMI1071732914 Fluut Base 400/2 SLA DC 2x10W 2x890 lm 4000K CRI90+ 36° incl. driver

1200lm

12° ZUMI1072652706 Fluut Base 400/2 SLA DC 2x14W 2x1270 lm 4000K CRI90+ 12° incl. driver

24° ZUMI1071662806 Fluut Base 400/2 SLA DC 2x14W 2x1270 lm 4000K CRI90+ 24° incl. driver

36° ZUMI1071672906 Fluut Base 400/2 SLA DC 2x14W 2x1270 lm 4000K CRI90+ 36° incl. driver

> [Driver](#)

Included, if dimmable: DALI, pushDIM



PRODUCT DESCRIPTION

The FLUUT is a very small and elegant spot with multiple possibilities. The tubes, with a diameter of about 55mm and a length of 120mm, are 359° rotatable and 80° inclinable and placed on a dimmable base. There are several standard possibilities, specials are on request.

Aluminium luminaire.

TECHNICAL DATA

| | |
|-----------------------|-----------------------|
| Application | surface |
| Dimensions | base: 400 x 41 x 41mm |
| IP rating | IP20 |
| Power | 230V |
| Lifetime L70/B50/65°C | >50000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |

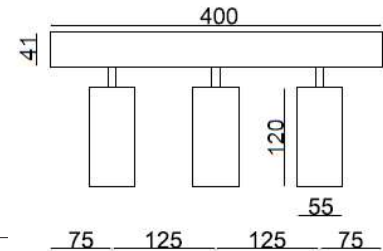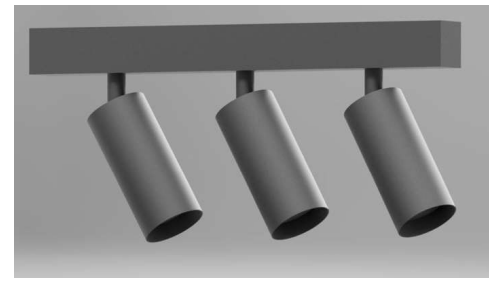

| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | 3x 9,5W | 230V | 3x 710 lm | 75 lm/W | 90+ | G |
| 3000K | 3x 9,5W | 230V | 3x 760 lm | 80 lm/W | 90+ | G |
| 4000K | 3x 9,5W | 230V | 3x 810 lm | 85 lm/W | 90+ | F |

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)

2700K

| | | |
|-----|-----------------|---|
| 12° | ZUMI1112602701 | Fluut Base 400/3 SLA AC G2 3x750lm 230V 3x9,5W 2700K CRI90+ 12° |
| 24° | ZUMI1111742801 | Fluut Base 400/3 SLA AC G2 3x710lm 230V 3x9,5W 2700K CRI90+ 24° |
| 36° | ZUMI 1111752901 | Fluut Base 400/3 SLA AC G2 3x710lm 230V 3x9,5W 2700K CRI90+ 36° |

3000K

| | | |
|-----|----------------|---|
| 12° | ZUMI1112612701 | Fluut Base 400/3 SLA AC G2 3x780lm 230V 3x9,5W 3000K CRI90+ 12° |
| 24° | ZUMI1111762801 | Fluut Base 400/3 SLA AC G2 3x760lm 230V 3x9,5W 3000K CRI90+ 24° |
| 36° | ZUMI1111772901 | Fluut Base 400/3 SLA AC G2 3x760lm 230V 3x9,5W 3000K CRI90+ 36° |

4000K

| | | |
|-----|----------------|---|
| 12° | ZUMI1112622701 | Fluut Base 400/3 SLA AC G2 3x820lm 230V 3x9,5W 4000K CRI90+ 12° |
| 24° | ZUMI1111782801 | Fluut Base 400/3 SLA AC G2 3x810lm 230V 3x9,5W 4000K CRI90+ 24° |
| 36° | ZUMI1111792901 | Fluut Base 400/3 SLA AC G2 3x810lm 230V 3x9,5W 4000K CRI90+ 36° |

> [no driver needed](#)

dimmable phase cut - see dimmerlist



PRODUCT DESCRIPTION

The FLUUT is a very small and elegant spot with multiple possibilities. The tubes, with a diameter of about 55mm and a length of 120mm, are 359° rotatable and 80° inclinable and placed on a base with the driver included which makes it easy to install. There are several standard possibilities, specials are on request.

Aluminium luminaire.

TECHNICAL DATA

| | |
|-----------------------|-----------------------|
| Application | surface |
| Dimensions | base: 400 x 60 x 40mm |
| IP rating | IP20 |
| Power | 230V |
| Lifetime L70/B50/65°C | >50000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |

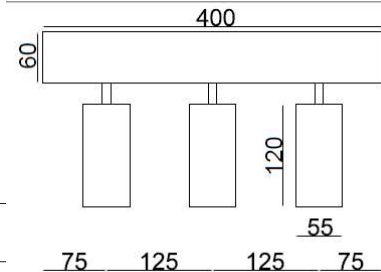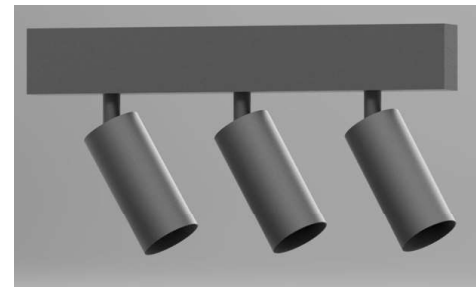

| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | 3x 10W | 250mA | 3x 770 lm | 88 lm/W | 90+ | G |
| | 3x 14W | 350mA | 3x 1140 lm | 93 lm/W | 90+ | G |
| 3000K | 3x 10W | 250mA | 3x 840 lm | 95 lm/W | 90+ | F |
| | 3x 14W | 350mA | 3x 1170 lm | 96 lm/W | 90+ | F |
| 4000K | 3x 10W | 250mA | 3x 890 lm | 101 lm/W | 90+ | F |
| | 3x 14W | 350mA | 3x 1270 lm | 104 lm/W | 90+ | F |

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + W (white) / B (black / C (champagne) / T (titanium) BASE only W/B/C / BR (bronze) BASE only W/B/C + (2) D (for dimmable)

2700K

700lm

24° ZUMI1081682814 Flut Base 400/3 SLA DC 3x10W 3x770 lm 2700K CRI90+ 24° incl. driver
36° ZUMI1081692914 Flut Base 400/3 SLA DC 3x10W 3x770 lm 2700K CRI90+ 36° incl. driver

1200lm

12° ZUMI1082632706 Flut Base 400/3 SLA DC 3x14W 3x1140 lm 2700K CRI90+ 12° incl. driver
24° ZUMI1081622806 Flut Base 400/3 SLA DC 3x14W 3x1140 lm 2700K CRI90+ 24° incl. driver
36° ZUMI1081632906 Flut Base 400/3 SLA DC 3x14W 3x1140 lm 2700K CRI90+ 36° incl. driver

3000K

700lm

24° ZUMI1081702814 Flut Base 400/3 SLA DC 3x10W 3x840 lm 3000K CRI90+ 24° incl. driver
36° ZUMI1081712914 Flut Base 400/3 SLA DC 3x10W 3x840 lm 3000K CRI90+ 36° incl. driver

1200lm

12° ZUMI1082642706 Flut Base 400/3 SLA DC 3x14W 3x1170 lm 3000K CRI90+ 12° incl. driver
24° ZUMI1081642806 Flut Base 400/3 SLA DC 3x14W 3x1170 lm 3000K CRI90+ 24° incl. driver
36° ZUMI1081652906 Flut Base 400/3 SLA DC 3x14W 3x1170 lm 3000K CRI90+ 36° incl. driver

4000K

700lm

24° ZUMI1081722814 Flut Base 400/3 SLA DC 3x10W 3x890 lm 4000K CRI90+ 24° incl. driver
36° ZUMI1081732914 Flut Base 400/3 SLA DC 3x10W 3x890 lm 4000K CRI90+ 36° incl. driver

1200lm

12° ZUMI1082652706 Flut Base 400/3 SLA DC 3x14W 3x1270 lm 4000K CRI90+ 12° incl. driver
24° ZUMI1081662806 Flut Base 400/3 SLA DC 3x14W 3x1270 lm 4000K CRI90+ 24° incl. driver
36° ZUMI1081672906 Flut Base 400/3 SLA DC 3x14W 3x1270 lm 4000K CRI90+ 36° incl. driver


> Driver

Included, if dimmable: DALI, pushDIM


PRODUCT DESCRIPTION

The FLUUT is a very small and elegant spot with multiple possibilities. The tubes, with a diameter of about 55mm and a length of 120mm, are 359° rotatable and 80° inclinable and placed on a dimmable base. There are several standard possibilities, specials are on request.

Aluminium luminaire.

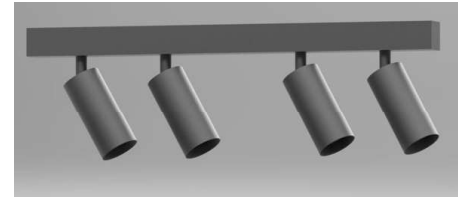**TECHNICAL DATA**

| | |
|-----------------------|-----------------------|
| Application | surface |
| Dimensions | base: 600 x 41 x 41mm |
| IP rating | IP20 |
| Power | 230V |
| Lifetime L70/B50/65°C | >50000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |

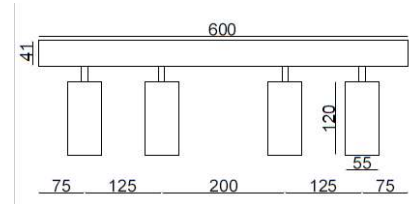

| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | 4x 9,5W | 230V | 4x 710 lm | 75 lm/W | 90+ | G |
| 3000K | 4x 9,5W | 230V | 4x 760 lm | 80 lm/W | 90+ | G |
| 4000K | 4x 9,5W | 230V | 4x 810 lm | 85 lm/W | 90+ | F |

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)

2700K

| | | |
|-----|-----------------|---|
| 12° | ZUMI1122602701 | Fluut Base 600/4 SLA AC G2 4x750lm 230V 4x9,5W 2700K CRI90+ 12° |
| 24° | ZUMI1121742801 | Fluut Base 600/4 SLA AC G2 4x710lm 230V 4x9,5W 2700K CRI90+ 24° |
| 36° | ZUMI 1121752901 | Fluut Base 600/4 SLA AC G2 4x710lm 230V 4x9,5W 2700K CRI90+ 36° |

3000K

| | | |
|-----|----------------|---|
| 12° | ZUMI1122612701 | Fluut Base 600/4 SLA AC G2 4x780lm 230V 4x9,5W 3000K CRI90+ 12° |
| 24° | ZUMI1121762801 | Fluut Base 600/4 SLA AC G2 4x760lm 230V 4x9,5W 3000K CRI90+ 24° |
| 36° | ZUMI1121772901 | Fluut Base 600/4 SLA AC G2 4x760lm 230V 4x9,5W 3000K CRI90+ 36° |

4000K

| | | |
|-----|----------------|---|
| 12° | ZUMI1122622701 | Fluut Base 600/4 SLA AC G2 4x820lm 230V 4x9,5W 4000K CRI90+ 12° |
| 24° | ZUMI1121782801 | Fluut Base 600/4 SLA AC G2 4x810lm 230V 4x9,5W 4000K CRI90+ 24° |
| 36° | ZUMI1121792901 | Fluut Base 600/4 SLA AC G2 4x810lm 230V 4x9,5W 4000K CRI90+ 36° |


> [no driver needed](#)

dimmmable phase cut - see dimmerlist


PRODUCT DESCRIPTION

The FLUUT is a very small and elegant spot with multiple possibilities. The tubes, with a diameter of about 55mm and a length of 120mm, are 359° rotatable and 80° inclinable, placed on a base with the driver included which makes it easy to install. There are several standard possibilities, specials are on request.

Aluminium luminaire.

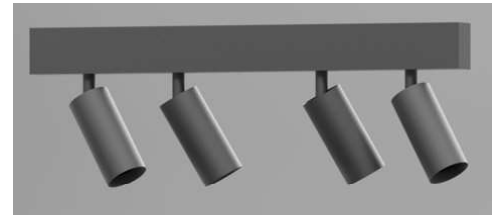**TECHNICAL DATA**

| | |
|-----------------------|-----------------------|
| Application | surface |
| Dimensions | base: 600 x 60 x 40mm |
| IP rating | IP20 |
| Power | 200mA |
| Lifetime L70/B50/65°C | >50000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |

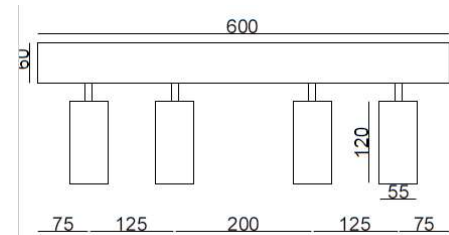

| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | 4x 10W | 250mA | 4x 770 lm | 88 lm/W | 90+ | G |
| | 4x 14W | 350mA | 4x 1140 lm | 93 lm/W | 90+ | G |
| 3000K | 4x 10W | 250mA | 4x 840 lm | 95 lm/W | 90+ | F |
| | 4x 14W | 350mA | 4x 1170 lm | 96 lm/W | 90+ | F |
| 4000K | 4x 10W | 250mA | 4x 890 lm | 101 lm/W | 90+ | F |
| | 4x 14W | 350mA | 4x 1270 lm | 104 lm/W | 90+ | F |

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + W (white) / B (black / C (champagne) / T (titanium) BASE only W/B/C / BR (bronze) BASE only W/B/C + (2) D (for dimmable)

2700K

700lm

24° ZUMI1091682814 Fluut Base 600/4 SLA DC 4x10W 4x770 lm 2700K CRI90+ 24° incl. driver
36° ZUMI1091692914 Fluut Base 600/4 SLA DC 4x10W 4x770 lm 2700K CRI90+ 36° incl. driver

1200lm

12° ZUMI1092632706 Fluut Base 600/4 SLA DC 4x14W 4x1140 lm 2700K CRI90+ 12° incl. driver
24° ZUMI1091622806 Fluut Base 600/4 SLA DC 4x14W 4x1140 lm 2700K CRI90+ 24° incl. driver
36° ZUMI1091632906 Fluut Base 600/4 SLA DC 4x14W 4x1140 lm 2700K CRI90+ 36° incl. driver

3000K

700lm

24° ZUMI1091702814 Fluut Base 600/4 SLA DC 4x10W 4x840 lm 3000K CRI90+ 24° incl. driver
36° ZUMI1091712914 Fluut Base 600/4 SLA DC 4x10W 4x840 lm 3000K CRI90+ 36° incl. driver

1200lm

12° ZUMI1092642706 Fluut Base 600/4 SLA DC 4x14W 4x1170 lm 3000K CRI90+ 12° incl. driver
24° ZUMI1091642806 Fluut Base 600/4 SLA DC 4x14W 4x1170 lm 3000K CRI90+ 24° incl. driver
36° ZUMI1091652906 Fluut Base 600/4 SLA DC 4x14W 4x1170 lm 3000K CRI90+ 36° incl. driver

4000K

700lm

24° ZUMI1091722814 Fluut Base 600/4 SLA DC 4x10W 4x890 lm 4000K CRI90+ 24° incl. driver
36° ZUMI1091732914 Fluut Base 600/4 SLA DC 4x10W 4x890 lm 4000K CRI90+ 36° incl. driver

1200lm

12° ZUMI1092652706 Fluut Base 600/4 SLA DC 4x14W 4x1270 lm 4000K CRI90+ 12° incl. driver
24° ZUMI1091662806 Fluut Base 600/4 SLA DC 4x14W 4x1270 lm 4000K CRI90+ 24° incl. driver
36° ZUMI1091672906 Fluut Base 600/4 SLA DC 4x14W 4x1270 lm 4000K CRI90+ 36° incl. driver

> Driver

Included, if dimmable: DALI, pushDIM

PRODUCT DESCRIPTION


The FLUUT is a very small and elegant spot with multiple possibilities. The tubes, with a diameter of about 55mm and a length of 120mm, are 359° rotatable and 80° inclinable, placed on a dimmable base. There are several standard possibilities, specials are on request.



Aluminium luminaire.

TECHNICAL DATA

| | |
|-----------------------|-----------------------|
| Application | surface |
| Dimensions | base: 600 x 41 x 41mm |
| IP rating | IP20 |
| Power | 230V |
| Lifetime L70/B50/65°C | >50000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |

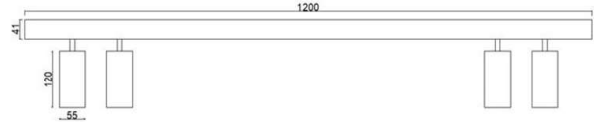

| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | 4x 9,5W | 230V | 4x 710 lm | 75 lm/W | 90+ | G |
| 3000K | 4x 9,5W | 230V | 4x 760 lm | 80 lm/W | 90+ | G |
| 4000K | 4x 9,5W | 230V | 4x 810 lm | 85 lm/W | 90+ | F |

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black) / C (champagne) / T (titanium) / BR (bronze)

2700K

| | | |
|-----|-----------------|--|
| 12° | ZUMI1142602701 | Fluut Base 1200/4 SLA AC G2 4x750lm 230V 4x9,5W 2700K CRI90+ 12° |
| 24° | ZUMI1141742801 | Fluut Base 1200/4 SLA AC G2 4x710lm 230V 4x9,5W 2700K CRI90+ 24° |
| 36° | ZUMI 1141752901 | Fluut Base 1200/4 SLA AC G2 4x710lm 230V 4x9,5W 2700K CRI90+ 36° |

3000K

| | | |
|-----|----------------|--|
| 12° | ZUMI1142612701 | Fluut Base 1200/4 SLA AC G2 4x780lm 230V 4x9,5W 3000K CRI90+ 12° |
| 24° | ZUMI1141762801 | Fluut Base 1200/4 SLA AC G2 4x760lm 230V 4x9,5W 3000K CRI90+ 24° |
| 36° | ZUMI1141772901 | Fluut Base 1200/4 SLA AC G2 4x760lm 230V 4x9,5W 3000K CRI90+ 36° |

4000K

| | | |
|-----|----------------|--|
| 12° | ZUMI1142622701 | Fluut Base 1200/4 SLA AC G2 4x820lm 230V 4x9,5W 4000K CRI90+ 12° |
| 24° | ZUMI1141782801 | Fluut Base 1200/4 SLA AC G2 4x810lm 230V 4x9,5W 4000K CRI90+ 24° |
| 36° | ZUMI1141792901 | Fluut Base 1200/4 SLA AC G2 4x810lm 230V 4x9,5W 4000K CRI90+ 36° |


> [no driver needed](#)

dimmmable phase cut - see dimmerlist


PRODUCT DESCRIPTION

The FLUUT is a very small and elegant spot with multiple possibilities. The tubes, with a diameter of about 55mm and a length of 120mm, are 359° rotatable and 80° inclinable, are placed on a base with the driver included which makes it easy to install. There are several standard possibilities, specials are on request.

Aluminium luminaire.

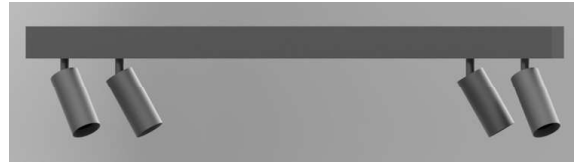**TECHNICAL DATA**

| | |
|-----------------------|------------------------|
| Application | surface |
| Dimensions | base: 1200 x 60 x 40mm |
| IP rating | IP20 |
| Power | 200mA |
| Lifetime L70/B50/65°C | >50000h |
| MacAdam ellipse | 3 |
| Guarantee | 5 year |

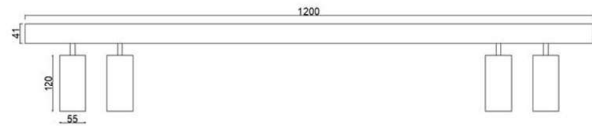

| Color Temperature | Wattage | Forward Current | Lumen (LED) (at tp = 65°C) | Lumen/Watt (LED) (at tp = 65°C) | CRI | Energy Label |
|-------------------|---------|-----------------|----------------------------|---------------------------------|-----|--------------|
| 2700K | 4x 10W | 250mA | 4x 770 lm | 88 lm/W | 90+ | G |
| | 4x 14W | 350mA | 4x 1140 lm | 93 lm/W | 90+ | G |
| 3000K | 4x 10W | 250mA | 4x 840 lm | 95 lm/W | 90+ | F |
| | 4x 14W | 350mA | 4x 1170 lm | 96 lm/W | 90+ | F |
| 4000K | 4x 10W | 250mA | 4x 890 lm | 101 lm/W | 90+ | F |
| | 4x 14W | 350mA | 4x 1270 lm | 104 lm/W | 90+ | F |

ORDER REFERENCE

> [LUMINAIRE](#)

! ORDER REFERENCE + W (white) / B (black / C (champagne) / T (titanium) BASE only W/B/C / BR (bronze) BASE only W/B/C + (2) D (for dimmable)

2700K

700lm

| | | |
|------------|----------------|---|
| 24° | ZUMI1131682814 | Fluut Base 1200/4 SLA DC 4x10W 4x770 lm 2700K CRI90+ 24° incl. driver |
| 36° | ZUMI1131692914 | Fluut Base 1200/4 SLA DC 4x10W 4x770 lm 2700K CRI90+ 36° incl. driver |

1200lm

| | | |
|------------|----------------|--|
| 12° | ZUMI1132632706 | Fluut Base 1200/4 SLA DC 4x14W 4x1140 lm 2700K CRI90+ 12° incl. driver |
| 24° | ZUMI1131622806 | Fluut Base 1200/4 SLA DC 4x14W 4x1140 lm 2700K CRI90+ 24° incl. driver |
| 36° | ZUMI1131632906 | Fluut Base 1200/4 SLA DC 4x14W 4x1140 lm 2700K CRI90+ 36° incl. driver |

3000K

700lm

| | | |
|------------|----------------|---|
| 24° | ZUMI1131702814 | Fluut Base 1200/4 SLA DC 4x10W 4x840 lm 3000K CRI90+ 24° incl. driver |
| 36° | ZUMI1131712914 | Fluut Base 1200/4 SLA DC 4x10W 4x840 lm 3000K CRI90+ 36° incl. driver |

1200lm

| | | |
|------------|----------------|--|
| 12° | ZUMI1132642706 | Fluut Base 1200/4 SLA DC 4x14W 4x1170 lm 3000K CRI90+ 12° incl. driver |
| 24° | ZUMI1131642806 | Fluut Base 1200/4 SLA DC 4x14W 4x1170 lm 3000K CRI90+ 24° incl. driver |
| 36° | ZUMI1131652906 | Fluut Base 1200/4 SLA DC 4x14W 4x1170 lm 3000K CRI90+ 36° incl. driver |

4000K

700lm

| | | |
|------------|----------------|---|
| 24° | ZUMI1131722814 | Fluut Base 1200/4 SLA DC 4x10W 4x890 lm 4000K CRI90+ 24° incl. driver |
| 36° | ZUMI1131732914 | Fluut Base 1200/4 SLA DC 4x10W 4x890 lm 4000K CRI90+ 36° incl. driver |

1200lm

| | | |
|------------|----------------|--|
| 12° | ZUMI1132652706 | Fluut Base 1200/4 SLA DC 4x14W 4x1270 lm 4000K CRI90+ 12° incl. driver |
| 24° | ZUMI1131662806 | Fluut Base 1200/4 SLA DC 4x14W 4x1270 lm 4000K CRI90+ 24° incl. driver |
| 36° | ZUMI1131672906 | Fluut Base 1200/4 SLA DC 4x14W 4x1270 lm 4000K CRI90+ 36° incl. driver |

> [Driver](#)

Included, if dimmable: DALI, pushDIM