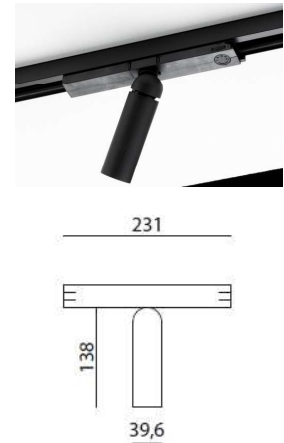


PRODUCT DESCRIPTION

PLK on track is a very small and elegant spot for general or accent lighting. The tube, with a diameter of about 40mm and a length of 138mm, is 359° rotatable and 80° inclinable.

Dimmable: only compatible with Global Trac PULSE from Nordic Aluminum and OneTrack from Stucchi.

**TECHNICAL DATA**

Application	3F Track
IP rating	IP20
Power	230V
Lifetime L70/B50/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	8,3W	200mA	864lm	121 lm/W	90+	E
3000K	8,3W	200mA	930lm	130 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) W (white) / B (black) / G (gold) / T (titanium) / BR (bronze)
(2) DD (Dali dim)

2700K 10°	ZUMI1202243005	PLK 3F TRACK 10° SLE G7 8,3W 864lm 2700K CRI90+ incl.driver
2700K 40°	ZUMI1202241205	PLK 3F TRACK 40° SLE G7 8,3W 864lm 2700K CRI90+ incl.driver
3000K 10°	ZUMI1202253005	PLK 3F TRACK 10° SLE G7 8,3W 930lm 3000K CRI90+ incl.driver
3000K 40°	ZUMI1202251205	PLK 3F TRACK 40° SLE G7 8,3W 930lm 3000K CRI90+ incl.driver

> DRIVER included if dimmable, Dali dim (only for Global Track pulse or Stucchi One track).