PRODUCT DESCRIPTION

The PLK MINI is a very small and elegant spot with mulitple possibilities. The tube, with a diameter of about 30mm and a length of 100mm, is 359° rotable and 80° inclinable.

Aluminium luminaire available in several colors..

TECHNICAL DATA

Application	Track (Stucchi)
IP rating	IP20
Power	48V
Lifetime L70/B50/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

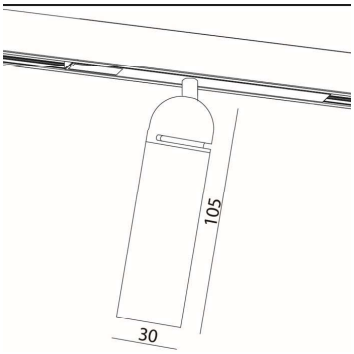

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	2,8W	48V DC	322lm	115 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + **(1) W** (white) / **B** (black) / / **G** (gold) / **T** (titanium) / **BR** (bronze)
(2) DD (dali dim)

2700K 10°	ZUMI1432823004	PLK Mini 48V DC 10° 2,8W 322lm 2700K CRI90+
2700K 40°	ZUMI1432821204	PLK Mini 48V DC 40° 2,8W 322lm 2700K CRI90+

> DRIVER (to be placed remoted)

non dimmable :

Compact	TRID28001232	LCU 48V 75W DC-STR FO SR
	TRID28001045	LCU 48V 150W DC-STR FO SR
Linear	TRID28000816	LCU 48V 75W DC-STR FO lp
	TRID28001234	LCU 48V 150W DC-STR FO lp

dimmable :

Compact	TRID28001233	LCU 48V 75W DC-STR DIM SR
	TRID28001044	LCU 48V 150W DC-STR DIM SR
Linear	TRID28000815	LCU 48V 75W DC-STR DIM lp
	TRID28001235	LCU 48V 150W DC-STR DIM lp