PRODUCT DESCRIPTION

The PLK COUPE is a very small and elegant spot based on the design of the PLK but with a flat end.
The tube, with a diameter of about 40mm and a length of 138mm, is 359° rotable and 80° inclinable.
Two tubes are placed on a plate with a diameter of 99 mm, available with torsion and flat springs.

Aluminium luminaire. Standard equipped with torsion springs.

TECHNICAL DATA

Application	semi - recessed
Dimensions	cut out: ø80mm h60mm
IP rating	IP20
Power	200mA
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire **+ driver**)

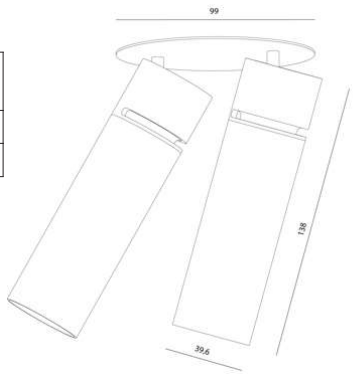

Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	2x6,9W	200mA	2x840 lm	123 lm/W	90+	E
3000K	2x6,9W	200mA	2x895 lm	131 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + **W** (white) / **B** (black) / **G** (gold) / **T** (titanium) / **BR** (bronze)

2700K 10°	ZUMI1502243005	PLK COUPE S 99 Double 10° SLE G7 2x6,9W 200mA 2x840lm 2700K CRI90+ ex.driver
2700K 40°	ZUMI1502241205	PLK COUPE S 99 Double 40° SLE G7 2x6,9W 200mA 2x840lm 2700K CRI90+ ex.driver
3000K 10°	ZUMI1502253005	PLK COUPE S 99 Double 10° SLE G7 2x6,9W 200mA 2x895lm 3000K CRI90+ ex.driver
3000K 40°	ZUMI1502251205	PLK COUPE S 99 Double 40° SLE G7 2x6,9W 200mA 2x895lm 3000K CRI90+ ex.driver

> DRIVER (parallel connection)

dimmable (Dali, switchDIM)

TRID28000674 + TRID28001168 + TRID28001112
LCA 17W 250–700mA one4all SC PRE + Strain-relief + Plug 400mA

non dimmable

TRID28000705 + TRID28001168 + TRID28001112
LC 17W 250-700mA flexC SC EXC + Strain-relief + Plug 400mA

> OPTIONS

Flat Springs

ZUMIFS Flat Springs