PRODUCT DESCRIPTION

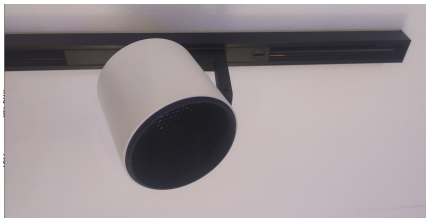

Spot for 48V track for general or accent lighting.
Aluminium Luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	TRACK (Stucchi)
Dimensions	ø 80mm h 80mm
IP rating	IP20
Power	48V DC
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)



Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	11,8W/350mA	48V DC	1558 lm	134 lm/W	90+	E
	16,9W/500mA	48V DC	2225 lm	134 lm/W	90+	E
3000K	11,8W/350mA	48V DC	1714 lm	147 lm/W	90+	E
	16,9W/500mA	48V DC	2449 lm	147 lm/W	90+	E
3500K	11,8W/350mA	48V DC	1732 lm	149 lm/W	90+	E
	16,9W/500mA	48V DC	2474 lm	149 lm/W	90+	E
4000K	11,8W/350mA	48V DC	1775 lm	152 lm/W	90+	E
	16,9W/500mA	48V DC	2536 lm	152 lm/W	90+	E

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) **G** (gold reflector) option only for 2700K or 3000K
+ (3) **DD** (Dali dim)

350mA

2700K

14°	ZUMI1182132304	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1558 lm 2700K 14° glass excl.driver
25°	ZUMI1182132404	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1558 lm 2700K 25° glass excl.driver
39°	ZUMI1182132504	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1558 lm 2700K 39° glass excl.driver
61°	ZUMI1182132604	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1558 lm 2700K 61° glass excl.driver

3000K

14°	ZUMI1182142304	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1714 lm 3000K 14° glass excl.driver
25°	ZUMI1182142404	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1714 lm 3000K 25° glass excl.driver
39°	ZUMI1182142504	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1714 lm 3000K 39° glass excl.driver
61°	ZUMI1182142604	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1714 lm 3000K 61° glass excl.driver

3500K

14°	ZUMI1182152304	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1732 lm 3500K 14° glass excl.driver
25°	ZUMI1182152404	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1732 lm 3500K 25° glass excl.driver
39°	ZUMI1182152504	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1732 lm 3500K 39° glass excl.driver
61°	ZUMI1182152604	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1732 lm 3500K 61° glass excl.driver

4000K

14°	ZUMI1182162304	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1775 lm 4000K 14° glass excl.driver
25°	ZUMI1182162404	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1775 lm 4000K 25° glass excl.driver
39°	ZUMI1182162504	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1775 lm 4000K 39° glass excl.driver
61°	ZUMI1182162604	Tubb 48V DC CRI90+ SLE G7 11,8W 350mA 1775 lm 4000K 61° glass excl.driver

500mA

2700K

14°	ZUMI1192132304	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2225 lm 2700K 14° glass excl.driver
25°	ZUMI1192132404	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2225 lm 2700K 25° glass excl.driver
39°	ZUMI1192132504	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2225 lm 2700K 39° glass excl.driver
61°	ZUMI1192132604	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2225 lm 2700K 61° glass excl.driver

3000K

14°	ZUMI1192142304	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2449 lm 3000K 14° glass excl.driver
25°	ZUMI1192142404	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2449 lm 3000K 25° glass excl.driver
39°	ZUMI1192142504	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2449 lm 3000K 39° glass excl.driver
61°	ZUMI1192142604	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2449 lm 3000K 61° glass excl.driver

3500K

14°	ZUMI1192152304	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2474 lm 3500K 14° glass excl.driver
25°	ZUMI1192152404	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2474 lm 3500K 25° glass excl.driver
39°	ZUMI1192152504	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2474 lm 3500K 39° glass excl.driver
61°	ZUMI1192152604	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2474 lm 3500K 61° glass excl.driver

4000K

14°	ZUMI1192162304	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2536 lm 4000K 14° glass excl.driver
25°	ZUMI1192162404	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2536 lm 4000K 25° glass excl.driver
39°	ZUMI1192162504	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2536 lm 4000K 39° glass excl.driver
61°	ZUMI1192162604	Tubb 48V DC CRI90+ SLE G7 16,9W 500mA 2536 lm 4000K 61° glass excl.driver

> OPTIONS

Honeycomb grid

	ZUMI25HC	Honeycomb grid

> Driver :

non dimmable :

Compact	TRID28001232	LCU 48V 75W DC-STR FO SR
	TRID28001045	LCU 48V 150W DC-STR FO SR
Linear	TRID28000816	LCU 48V 75W DC-STR FO lp
	TRID28001234	LCU 48V 150W DC-STR FO lp

dimmable :

Compact	TRID28001233	LCU 48V 75W DC-STR DIM SR
	TRID28001044	LCU 48V 150W DC-STR DIM SR
Linear	TRID28000815	LCU 48V 75W DC-STR DIM lp
	TRID28001235	LCU 48V 150W DC-STR DIM lp

PRODUCT DESCRIPTION

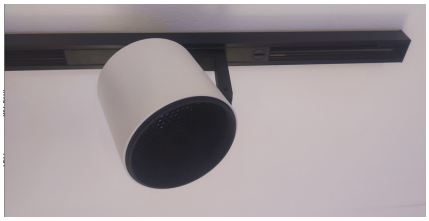

Spot for 48V track for general or accent lighting equipped with a LEDmodule especially to enlighten several food products.
There's a choice between 'fish' to light up fish products, 'gold' for bakery goods and 'gold+' for rather crusty bakery goods such as croissants and baguettes.
The cannon 'meat+' provides a highly red color which is ideal for the presentation of meat.
Its 'fresh meat' is suitable to use for meat in the counter. Fruit is ideal for fruit and vegetables.

Aluminium Luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	TRACK
Dimensions	ø 80mm h 80mm
IP rating	IP20
Power	48V DC
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	3
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)



Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
FISH	11,8W/350mA	48V DC	1411 lm	121 lm/W	/	E
	16,9W/500mA	48V DC	2015 lm	121 lm/W	/	E
GOLD 2700K	11,8W/350mA	48V DC	1308 lm	112 lm/W	/	E
	16,9W/500mA	48V DC	1868 lm	112 lm/W	/	E
GOLD+ 2400K	11,8W/350mA	48V DC	826 lm	73 lm/W	/	F
	16,9W/500mA	48V DC	1171 lm	70 lm/W	/	F
MEAT+	11,8W/350mA	48V DC	879 lm	75 lm/W	/	n.a
	16,9W/500mA	48V DC	1256 lm	75 lm/W	/	n.a
FRESH MEAT	11,8W/350mA	48V DC	857 lm	74 lm/W	/	n.a
	16,9W/500mA	48V DC	1224 lm	74 lm/W	/	n.a
FRUIT	11,8W/350mA	48V DC	1224 lm	105 lm/W	/	F
	16,9W/500mA	48V DC	1748 lm	105 lm/W	/	F

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) **G** (gold reflector) option only for Gold 2700K & Gold+ 2400K
+ (3) **DD** (Dali dim)

350mA

FISH

14°	ZUMI1182173104	Tubb 48V DC Fish SLE G7 11,8W 350mA 1411 lm 14° PC excl.driver
25°	ZUMI1182171904	Tubb 48V DC Fish SLE G7 11,8W 350mA 1411 lm 25° PC excl.driver
39°	ZUMI1182172004	Tubb 48V DC Fish SLE G7 11,8W 350mA 1411 lm 39° PC excl.driver
61°	ZUMI1182172104	Tubb 48V DC Fish SLE G7 11,8W 350mA 1411 lm 61° PC excl.driver

GOLD 2700K

14°	ZUMI1182183104	Tubb 48V DC Gold SLE G7 11,8W 350mA 1308 lm 2700K 14° PC excl.driver
25°	ZUMI1182181904	Tubb 48V DC Gold SLE G7 11,8W 350mA 1308 lm 2700K 25° PC excl.driver
39°	ZUMI1182182004	Tubb 48V DC Gold SLE G7 11,8W 350mA 1308 lm 2700K 39° PC excl.driver
61°	ZUMI1182182104	Tubb 48V DC Gold SLE G7 11,8W 350mA 1308 lm 2700K 61° PC excl.driver

GOLD+ 2400K

14°	ZUMI1182083104	Tubb 48V DC Gold+ SLE G7 11,8W 350mA 826 lm 2400K 14° PC excl.driver
25°	ZUMI1182081904	Tubb 48V DC Gold+ SLE G7 11,8W 350mA 826 lm 2400K 25° PC excl.driver
39°	ZUMI1182082004	Tubb 48V DC Gold+ SLE G7 11,8W 350mA 826 lm 2400K 39° PC excl.driver
61°	ZUMI1182082104	Tubb 48V DC Gold+ SLE G7 11,8W 350mA 826 lm 2400K 61° PC excl.driver

MEAT+

14°	ZUMI1182193104	Tubb 48V DC Meat+ SLE G7 11,8W 350mA 879 lm 14° PC excl.driver
25°	ZUMI1182191904	Tubb 48V DC Meat+ SLE G7 11,8W 350mA 879 lm 25° PC excl.driver
39°	ZUMI1182192004	Tubb 48V DC Meat+ SLE G7 11,8W 350mA 879 lm 39° PC excl.driver
61°	ZUMI1182192104	Tubb 48V DC Meat+ SLE G7 11,8W 350mA 879 lm 61° PC excl.driver

FRESH MEAT

14°	ZUMI1182203104	Tubb 48V DC Fresh Meat SLE G7 11,8W 350mA 857 lm 14° PC excl.driver
25°	ZUMI1182201904	Tubb 48V DC Fresh Meat SLE G7 11,8W 350mA 857 lm 25° PC excl.driver
39°	ZUMI1182202004	Tubb 48V DC Fresh Meat SLE G7 11,8W 350mA 857 lm 39° PC excl.driver
61°	ZUMI1182202104	Tubb 48V DC Fresh Meat SLE G7 11,8W 350mA 857 lm 61° PC excl.driver

FRUIT

14°	ZUMI1182213104	Tubb 48V DC Fruit SLE G7 11,8W 350mA 1224 lm 14° PC excl.driver
25°	ZUMI1182211904	Tubb 48V DC Fruit SLE G7 11,8W 350mA 1224 lm 25° PC excl.driver
39°	ZUMI1182212004	Tubb 48V DC Fruit SLE G7 11,8W 350mA 1224 lm 39° PC excl.driver
61°	ZUMI1182212104	Tubb 48V DC Fruit SLE G7 11,8W 350mA 1224 lm 61° PC excl.driver

500mA

FISH

14°	ZUMI1192173104	Tubb 48V DC Fish SLE G7 16,9W 500mA 2015 lm 14° PC excl.driver
25°	ZUMI1192171904	Tubb 48V DC Fish SLE G7 16,9W 500mA 2015 lm 25° PC excl.driver
39°	ZUMI1192172004	Tubb 48V DC Fish SLE G7 16,9W 500mA 2015 lm 39° PC excl.driver
61°	ZUMI1192172104	Tubb 48V DC Fish SLE G7 16,9W 500mA 2015 lm 61° PC excl.driver

GOLD 2700K

14°	ZUMI1192183104	Tubb 48V DC Gold SLE G7 16,9W 500mA 1868 lm 2700K 14° PC excl.driver
25°	ZUMI1192181904	Tubb 48V DC Gold SLE G7 16,9W 500mA 1868 lm 2700K 25° PC excl.driver
39°	ZUMI1192182004	Tubb 48V DC Gold SLE G7 16,9W 500mA 1868 lm 2700K 39° PC excl.driver
61°	ZUMI1192182104	Tubb 48V DC Gold SLE G7 16,9W 500mA 1868 lm 2700K 61° PC excl.driver

GOLD+ 2400K

14°	ZUMI1192083104	Tubb 48V DC Gold+ SLE G7 16,9W 500mA 1171 lm 2400K 14° PC excl.driver
25°	ZUMI1192081904	Tubb 48V DC Gold+ SLE G7 16,9W 500mA 1171 lm 2400K 25° PC excl.driver
39°	ZUMI1192082004	Tubb 48V DC Gold+ SLE G7 16,9W 500mA 1171 lm 2400K 39° PC excl.driver
61°	ZUMI1192082104	Tubb 48V DC Gold+ SLE G7 16,9W 500mA 1171 lm 2400K 61° PC excl.driver

MEAT+

14°	ZUMI1192193104	Tubb 48V DC Meat+ SLE G7 16,9W 500mA 1256 lm 14° PC excl.driver
25°	ZUMI1192191904	Tubb 48V DC Meat+ SLE G7 16,9W 500mA 1256 lm 25° PC excl.driver
39°	ZUMI1192192004	Tubb 48V DC Meat+ SLE G7 16,9W 500mA 1256 lm 39° PC excl.driver
61°	ZUMI1192192104	Tubb 48V DC Meat+ SLE G7 16,9W 500mA 1256 lm 61° PC excl.driver

FRESH MEAT

14°	ZUMI1192203104	Tubb 48V DC Fresh Meat SLE G7 16,9W 500mA 1224 lm 14° PC excl.driver
25°	ZUMI1192201904	Tubb 48V DC Fresh Meat SLE G7 16,9W 500mA 1224 lm 25° PC excl.driver
39°	ZUMI1192202004	Tubb 48V DC Fresh Meat SLE G7 16,9W 500mA 1224 lm 39° PC excl.driver
61°	ZUMI1192202104	Tubb 48V DC Fresh Meat SLE G7 16,9W 500mA 1224 lm 61° PC excl.driver

FRUIT

14°	ZUMI1192213104	Tubb 48V DC Fruit SLE G7 16,9W 500mA 1748 lm 14° PC excl.driver
25°	ZUMI1192211904	Tubb 48V DC Fruit SLE G7 16,9W 500mA 1748 lm 25° PC excl.driver
39°	ZUMI1192212004	Tubb 48V DC Fruit SLE G7 16,9W 500mA 1748 lm 39° PC excl.driver
61°	ZUMI1192212104	Tubb 48V DC Fruit SLE G7 16,9W 500mA 1748 lm 61° PC excl.driver

> OPTIONS

Honeycomb grid

	ZUMI25HC	Honeycomb grid

> Driver :

non dimmable :

Compact	TRID28001232	LCU 48V 75W DC-STR FO SR
	TRID28001045	LCU 48V 150W DC-STR FO SR
Linear	TRID28000816	LCU 48V 75W DC-STR FO lp
	TRID28001234	LCU 48V 150W DC-STR FO lp

dimmable :

Compact	TRID28001233	LCU 48V 75W DC-STR DIM SR
	TRID28001044	LCU 48V 150W DC-STR DIM SR
Linear	TRID28000815	LCU 48V 75W DC-STR DIM lp
	TRID28001235	LCU 48V 150W DC-STR DIM lp

PRODUCT DESCRIPTION

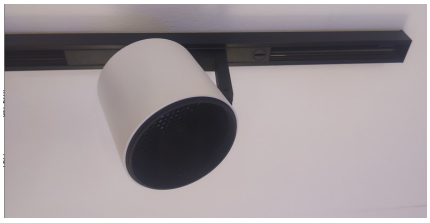

Spot for 48V track for general or accent lighting.
Aluminium Luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	TRACK
Dimensions	ø 80mm h 80mm
IP rating	IP20
Power	48V DC
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	2
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)



Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3100K	11,8W/350mA	48V DC	1210 lm	104 lm/W	98	F
	16,9W/500mA	48V DC	1729 lm	104 lm/W	98	F

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) **G** (gold reflector)
+ (3) **DD** (Dali dim)

350mA

14°	ZUMI1182222304	Tubb 48V DC Art CRI97 SLE G7 11,8W 350mA 1210 lm 3100K 14° glass excl.driver
25°	ZUMI1182222404	Tubb 48V DC Art CRI97 SLE G7 11,8W 350mA 1210 lm 3100K 25° glass excl.driver
39°	ZUMI1182222504	Tubb 48V DC Art CRI97 SLE G7 11,8W 350mA 1210 lm 3100K 39° glass excl.driver
61°	ZUMI1182222604	Tubb 48V DC Art CRI97 SLE G7 11,8W 350mA 1210 lm 3100K 61° glass excl.driver

500mA

14°	ZUMI1192222304	Tubb 48V DC Art CRI97 SLE G7 16,9W 500mA 1729 lm 3100K 14° glass excl.driver
25°	ZUMI1192222404	Tubb 48V DC Art CRI97 SLE G7 16,9W 500mA 1729 lm 3100K 25° glass excl.driver
39°	ZUMI1192222504	Tubb 48V DC Art CRI97 SLE G7 16,9W 500mA 1729 lm 3100K 39° glass excl.driver
61°	ZUMI1192222604	Tubb 48V DC Art CRI97 SLE G7 16,9W 500mA 1729 lm 3100K 61° glass excl.driver

> OPTIONS

Honeycomb grid

	ZUMI25HC	Honeycomb grid

> Driver :

non dimmable :

Compact	TRID28001232	LCU 48V 75W DC-STR FO SR
	TRID28001045	LCU 48V 150W DC-STR FO SR
Linear	TRID28000816	LCU 48V 75W DC-STR FO lp
	TRID28001234	LCU 48V 150W DC-STR FO lp

dimmable :

Compact	TRID28001233	LCU 48V 75W DC-STR DIM SR
	TRID28001044	LCU 48V 150W DC-STR DIM SR
Linear	TRID28000815	LCU 48V 75W DC-STR DIM lp
	TRID28001235	LCU 48V 150W DC-STR DIM lp

PRODUCT DESCRIPTION

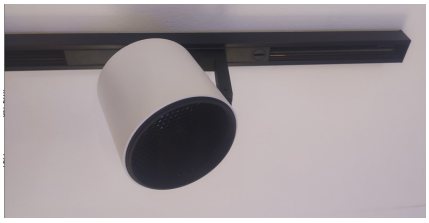

Spot for 48V track for general or accent lighting.
Aluminium Luminaire in several colors and color temperatures with several possible reflectors.

TECHNICAL DATA

Application	TRACK
Dimensions	ø 80mm h 80mm
IP rating	IP20
Power	48V DC
Lifetime L70/F10/65°C	>55000h
MacAdam ellipse	2
Guarantee	5 year

(*on components, only if ordered luminaire **+driver**)



Color Temperature	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
3250K	11,8W/350mA	48V DC	1313 lm	136 lm/W	95	F
	16,9W/500mA	48V DC	1876 lm	136 lm/W	95	F

ORDER REFERENCE

> LUMINAIRE

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **G** (gold) / **F** (forest)
+ (2) **DD** (Dali dim)

350mA

14°	ZUMI1182232304	Tubb 48V DC Fashion CRI95 SLE G7 11,8W 350mA 1313 lm 3250K 14° glass excl.driver
25°	ZUMI1182232404	Tubb 48V DC Fashion CRI95 SLE G7 11,8W 350mA 1313 lm 3250K 25° glass excl.driver
39°	ZUMI1182232504	Tubb 48V DC Fashion CRI95 SLE G7 11,8W 350mA 1313 lm 3250K 39° glass excl.driver
61°	ZUMI1182232604	Tubb 48V DC Fashion CRI95 SLE G7 11,8W 350mA 1313 lm 3250K 61° glass excl.driver

500mA

14°	ZUMI1192232304	Tubb 48V DC Fashion CRI95 SLE G7 16,9W 500mA 1876 lm 3250K 14° glass excl.driver
25°	ZUMI1192232404	Tubb 48V DC Fashion CRI95 SLE G7 16,9W 500mA 1876 lm 3250K 25° glass excl.driver
39°	ZUMI1192232504	Tubb 48V DC Fashion CRI95 SLE G7 16,9W 500mA 1876 lm 3250K 39° glass excl.driver
61°	ZUMI1192232604	Tubb 48V DC Fashion CRI95 SLE G7 16,9W 500mA 1876 lm 3250K 61° glass excl.driver

> OPTIONS

Honeycomb grid

ZUMI25HC	Honeycomb grid

> Driver :

non dimmable :

Compact	TRID28001232	LCU 48V 75W DC-STR FO SR
	TRID28001045	LCU 48V 150W DC-STR FO SR
Linear	TRID28000816	LCU 48V 75W DC-STR FO lp
	TRID28001234	LCU 48V 150W DC-STR FO lp

dimmable :

Compact	TRID28001233	LCU 48V 75W DC-STR DIM SR
	TRID28001044	LCU 48V 150W DC-STR DIM SR
Linear	TRID28000815	LCU 48V 75W DC-STR DIM lp
	TRID28001235	LCU 48V 150W DC-STR DIM lp