PRODUCT DESCRIPTION

The U40 3F, an extruded profile with opal polycarbonate protection, is placed on a 3 phase track and available in different standard lenghts. Available in several finishes, color temperatures, dimmable and non dimmable.

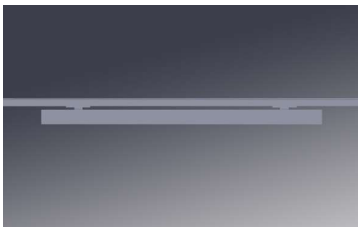

TECHNICAL DATA

Application	3F track
Dimensions	L x 40 x 60mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

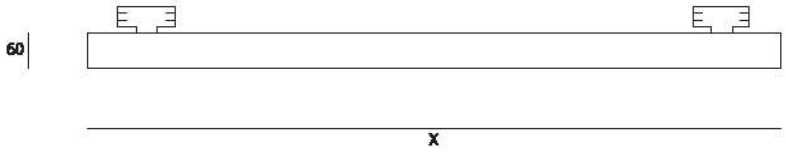



Color Temperature	Length	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	580 mm	10,5W	400mA	1224 lm	135 lm/W	90+	D
	1150 mm	20,9W	400mA	2448 lm	135 lm/W	90+	D
	1430 mm	26,2W	400mA	3060 lm	135 lm/W	90+	D
	1710 mm	31,4W	400mA	3672 lm	135 lm/W	90+	D
	1990 mm	36,7W	400mA	4292 lm	135 lm/W	90+	D
3000K	580 mm	10,5W	400mA	1272 lm	142 lm/W	90+	D
	1150 mm	20,9W	400mA	2544 lm	142 lm/W	90+	D
	1430 mm	26,2W	400mA	3180 lm	142 lm/W	90+	D
	1710 mm	31,4W	400mA	3816 lm	142 lm/W	90+	D
	1990 mm	36,7W	400mA	4564 lm	142 lm/W	90+	D
4000K	580 mm	10,5W	400mA	1320 lm	148 lm/W	90+	D
	1150 mm	20,9W	400mA	2640 lm	148 lm/W	90+	D
	1430 mm	26,2W	400mA	3300 lm	148 lm/W	90+	D
	1710 mm	31,4W	400mA	3960 lm	148 lm/W	90+	D
	1990 mm	36,7W	400mA	4760 lm	148 lm/W	90+	D

ORDER REFERENCE

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **A** (aluminium) / **C** (champagne)
+ (2) **D** (for dimmable)

> FIXTURE

2700K

580 mm	ZUMI41S1880119	U40 3F 580mm LO LLE ADV5 10,5W 400mA 1224lm 2700K CRI90+ incl.driver
1150 mm	ZUMI41M1880119	U40 3F 1150mm LO LLE ADV5 20,9W 400mA 2448lm 2700K CRI90+ incl.driver
1430 mm	ZUMI41L1880119	U40 3F 1430mm LO LLE ADV5 26,2W 400mA 3060lm 2700K CRI90+ incl.driver
1710 mm	ZUMI41XL1880119	U40 3F 1710mm LO LLE ADV5 31,4W 400mA 3672lm 2700K CRI90+ incl.driver
1990 mm	ZUMI41XXL1880119	U40 3F 1990mm LO LLE ADV5 36,7W 400mA 4292lm 2700K CRI90+ incl.driver

3000K

580 mm	ZUMI41S1890119	U40 3F 580mm LO LLE ADV5 10,5W 400mA 1272lm 3000K CRI90+ incl.driver
1150 mm	ZUMI41M1890119	U40 3F 1150mm LO LLE ADV5 20,9W 400mA 2544lm 3000K CRI90+ incl.driver
1430 mm	ZUMI41L1890119	U40 3F 1430mm LO LLE ADV5 26,2W 400mA 3180lm 3000K CRI90+ incl.driver
1710 mm	ZUMI41XL1890119	U40 3F 1710mm LO LLE ADV5 31,4W 400mA 3816lm 3000K CRI90+ incl.driver
1990 mm	ZUMI41XXL1890119	U40 3F 1990mm LO LLE ADV5 36,7W 400mA 4564lm 3000K CRI90+ incl.driver

4000K

580 mm	ZUMI41S1900119	U40 3F 580mm LO LLE ADV5 10,5W 400mA 1320lm 4000K CRI90+ incl.driver
1150 mm	ZUMI41M1900119	U40 3F 1150mm LO LLE ADV5 20,9W 400mA 2640lm 4000K CRI90+ incl.driver
1430 mm	ZUMI41L1900119	U40 3F 1430mm LO LLE ADV5 26,2W 400mA 3300lm 4000K CRI90+ incl.driver
1710 mm	ZUMI41XL1900119	U40 3F 1710mm LO LLE ADV5 31,4W 400mA 3960lm 4000K CRI90+ incl.driver
1990 mm	ZUMI41XXL1900119	U40 3F 1990mm LO LLE ADV5 36,7W 400mA 4760lm 4000K CRI90+ incl.driver

> CONVERTER

Included, if dimmable: DALI, DSI

PRODUCT DESCRIPTION

The U40 3F, an extruded profile with opal polycarbonate protection, is placed on a 3 phase track and comes in different standard lenghts. Available in several finishes, color temperatures, dimmable and non dimmable.

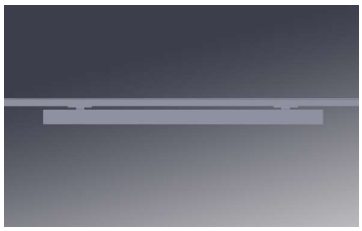

TECHNICAL DATA

Application	3F track
Dimensions	L x 40 x 60mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

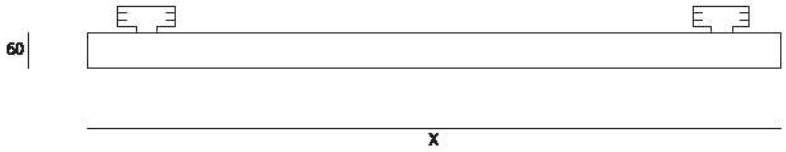



Color Temp.	Length	Wattage	Forward Current	Lumen (LED) (at tp = 65°C)	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K	580 mm	21,6W	275mA	2546 lm	136 lm/W	90+	D
	1150 mm	43,1W	275mA	5092 lm	136 lm/W	90+	D
	1430 mm	53,8W	275mA	6365 lm	136 lm/W	90+	D
	1710 mm	64,6W	275mA	7638 lm	136 lm/W	90+	D
	1990 mm	84,5W	275mA	9993 lm	136 lm/W	90+	D
3000K	580 mm	20,6W	400mA	2612 lm	146 lm/W	90+	D
	1150 mm	41,2W	400mA	5224 lm	146 lm/W	90+	D
	1430 mm	51,5W	400mA	6530 lm	146 lm/W	90+	D
	1710 mm	61,7W	400mA	7836 lm	146 lm/W	90+	D
	1990 mm	82,6W	400mA	10487 lm	146 lm/W	90+	D
4000K	580 mm	20,6W	400mA	2740 lm	153 lm/W	90+	D
	1150 mm	41,2W	400mA	5480 lm	153 lm/W	90+	D
	1430 mm	51,5W	400mA	6850 lm	153 lm/W	90+	D
	1710 mm	61,7W	400mA	8220 lm	153 lm/W	90+	D
	1990 mm	82,6W	400mA	10989 lm	153 lm/W	90+	D

ORDER REFERENCE

! ORDER REFERENCE + (1) **W** (white) / **B** (black) / **A** (aluminium) / **C** (champagne)
+ (2) **D** (for dimmable)

> FIXTURE

2700K

580 mm	ZUMI41S1880123	U40 3F 580 mm HO LLE ADV5 21,6W 275mA 2546 lm 2700K CRI90+ incl. conv.
1150 mm	ZUMI41M1880123	U40 3F 1150 mm HO LLE ADV5 43,1W 275mA 5092 lm 2700K CRI90+ incl. conv.
1430 mm	ZUMI41L1880123	U40 3F 1430 mm HO LLE ADV5 53,8W 275mA 6365 lm 2700K CRI90+ incl. conv.
1710 mm	ZUMI41XL1880123	U40 3F 1710 mm HO LLE ADV5 64,6W 275mA 7638 lm 2700K CRI90+ incl. conv.
1990 mm	ZUMI41XXL1880123	U40 3F 1990 mm HO LLE ADV5 84,5W 275mA 9993 lm 2700K CRI90+ incl. conv.

3000K

580 mm	ZUMI41S1890119	U40 3F 580 mm HO LLE ADV5 20,6W 400mA 2612 lm 3000K CRI90+ incl. conv.
1150 mm	ZUMI41M1890119	U40 3F 1150 mm HO LLE ADV5 41,2W 400mA 5224 lm 3000K CRI90+ incl. conv.
1430 mm	ZUMI41L1890119	U40 3F 1430 mm HO LLE ADV5 51,5W 400mA 6530 lm 3000K CRI90+ incl. conv.
1710 mm	ZUMI41XL1890119	U40 3F 1710 mm HO LLE ADV5 61,7W 400mA 7836 lm 3000K CRI90+ incl. conv.
1990 mm	ZUMI41XXL1890119	U40 3F 1990 mm HO LLE ADV5 82,6W 400mA 10487 lm 3000K CRI90+ incl. conv.

4000K

580 mm	ZUMI41S1900119	U40 3F 580 mm HO LLE ADV5 20,6W 400mA 2740 lm 4000K CRI90+ incl. conv.
1150 mm	ZUMI41M1900119	U40 3F 1150 mm HO LLE ADV5 41,2W 400mA 5480 lm 4000K CRI90+ incl. conv.
1430 mm	ZUMI41L1900119	U40 3F 1430 mm HO LLE ADV5 51,5W 400mA 6850 lm 4000K CRI90+ incl. conv.
1710 mm	ZUMI41XL1900119	U40 3F 1710 mm HO LLE ADV5 61,7W 400mA 8220 lm 4000K CRI90+ incl. conv.
1990 mm	ZUMI41XXL1900119	U40 3F 1990 mm HO LLE ADV5 82,6W 400mA 10989 lm 4000K CRI90+ incl. conv.

> CONVERTER

Included, if dimmable: DALI, DSI