



PRODUCT DESCRIPTION

Extruded aluminium profile for Up & Down. Can also be equipped with the Z-DOT module. Available in several color temperatures, dimmable and non dimmable.

Different compositions can be made with different lengths, corners and light modules.

TECHNICAL DATA

Application	suspended- wall
Dimensions	L x 40 x 70 mm
IP rating	IP20
Power	230V
Lifetime L70/F10/65°C	>60000h
MacAdam ellipse	3
Guarantee	5 year

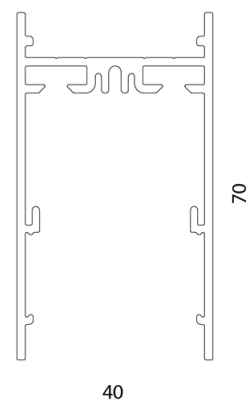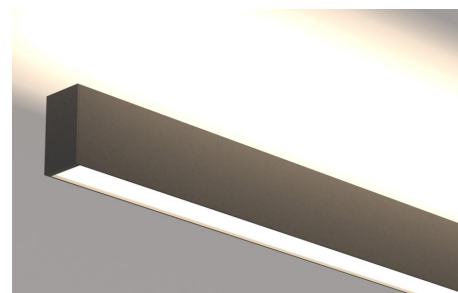

Color Temperature	Forward current	Lumen/Watt (LED) (at tp = 65°C)	CRI	Energy Label
2700K LO	400 mA	135 lm/W	90+	D
2700K HO	275mA	136 lm/W	90+	D
3000K LO	400mA	142 lm/W	90+	D
3000K HO	400mA	146 lm/W	90+	D
4000K LO	400mA	148 lm/W	90+	D
4000K HO	400mA	153 lm/W	90+	D
TW WW	275mA	130 lm/W	90+	F
TW CW	275mA	145 lm/W	90+	F

Z-DOT module excl.Driver

COLOR TEMP.	LENGTH MODULE	FOR- WARD CURRENT	ORDER REFERENCE + W / B / A / C / BR	WATTAGE	LUMEN (LED)
2700K	180mm	200 mA	ZUMI1742823005	9,6W	1104 lm
3000K	180mm	200 mA	ZUMI1742893005	9,6W	1164 lm



ORDER REFERENCE

> PROFILE

PROFILE /m	ZUMI174EP	+ W / B / A / C / BR	U40+ EMPTY profile /m
END CAP	ZUMI174EC	+ W / B / A / C / BR	U40+ ENDCAP
PMMA /m	ZUMI174PMMA		U40+ PMMA satin plexi profile/m

(W (white) / B (black) / A (aluminium) / C (champagne) / BR (bronze))

> MODULES FOR PMMA (PMMA NOT INCLUDED, TO BE ORDERED SEPARATELY!)

LO for Up and/or down - HO only for downlight !!


COLOR TEMP.		LENGTH MODULE	ORDER REFERENCE ! + D (for dimmable)	WATTAGE	LUMEN (LED)
2700K	LO	562mm LO	ZUMI94S2380119	10,5W	1224 lm
		842mm LO	ZUMI94M2380119	15,7W	1836 lm
		1123mm LO	ZUMI94L2380119	20,9W	2448lm
		1404mm LO	ZUMI94XL2380119	26,2W	3060 lm
		1685mm LO	ZUMI94SL2380119	31,4W	3672 lm
	HO only down!	562mm HO	ZUMI94S1880123	21,6W	2546 lm
		842mm HO	ZUMI94M1880123	32,3W	3819 lm
		1123mm HO	ZUMI94L1880123	43,1W	5092 lm
		1404mm HO	ZUMI94XL1880123	53,8W	6365lm
		1685mm HO	ZUMI94SL1880123	64,4W	7638 lm

3000K	LO	562mm LO	ZUMI94S2390119	10,5W	1272 lm	
		842mm LO	ZUMI94M2390119	15,7W	1908 lm	
		1123mm LO	ZUMI94L2390119	20,9W	2544lm	
		1404mm LO	ZUMI94XL2390119	26,2W	3180 lm	
		1685mm LO	ZUMI94SL2390119	31,4W	3816 lm	
	HO only down!	HO	562mm HO	ZUMI94S1890119	20,6W	2612 lm
			842mm HO	ZUMI94M1890119	30,9W	3918 lm
			1123mm HO	ZUMI94L1890119	41,2W	5224 lm
			1404mm HO	ZUMI94XL1890119	51,5W	6530lm
			1685mm HO	ZUMI94SL1890119	61,7W	7836 lm
4000K	LO	562mm LO	ZUMI94S2400119	10,5W	1320 lm	
		842mm LO	ZUMI94M2400119	15,7W	1980 lm	
		1123mm LO	ZUMI94L2400119	20,9W	2640lm	
		1404mm LO	ZUMI94XL2400119	26,2W	3300 lm	
		1685mm LO	ZUMI94SL2400119	31,4W	3960 lm	
	HO only down!	HO	562mm HO	ZUMI94S1900119	20,6W	2740 lm
			842mm HO	ZUMI94M1900119	30,9W	4110 lm
			1123mm HO	ZUMI94L1900119	41,2W	5480 lm
			1404mm HO	ZUMI94XL1900119	51,5W	6850 lm
			1685mm HO	ZUMI94SL1900119	61,7W	8220 lm
TW 2700K - 6500K		842mm	ZUMI94M2310114	44,4 W	4500 lm	
		1123mm	ZUMI94L2320114	55,3 W	6000 lm	
		1404mm	ZUMI94XL2720114	68,7W	7500 lm	





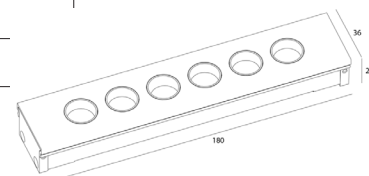


> Z-DOT module excl.Driver

COLOR TEMP.	LENGTH MODULE	FOR- WARD CURRENT	ORDER REFERENCE + W / B / A / C / BR	WATTAGE	LUMEN (LED)
2700K	180mm	200 mA	ZUMI1742823005	9,6W	1104 lm
3000K	180mm	200 mA	ZUMI1742893005	9,6W	1164 lm

(W (white) / B (black) / A (aluminium) / C (champagne) / BR (bronze))



OPTIONS

CORNER 90°		ZUMI41C90		U40+ Corner 90°
CORNER 180°		ZUMI41C180		U40+ Corner 180°
SQUARE BASE		ZUMIPD6060	+ W / B / A	Square base 60x60
ROUND BASE		ZUMIPD801	+ W / B / A	Round base ø80mm
WIRE 1,60m		ZUMI12WIRE160		WIRE 5x0,75 1M60
WIRE 6,00m		ZUMI12WIRE600		WIRE 5x0,75 6M00
SUSPENSION CABLE SINGLE		ZUMI12SUSPSU70160		U40+ suspension cable single 1m60
		ZUMI12SUSPSU70600		U40+ suspension cable single 6m00
COVERPROF.		ZUMI174CP	+ W / B / A / C / BR	U40+ coverprofile /m
EMERGENCY KIT		on request		

> [DRIVER](#)

Included, if dimmable: DALI, pushDIM (for dimmable add D to order reference!)